
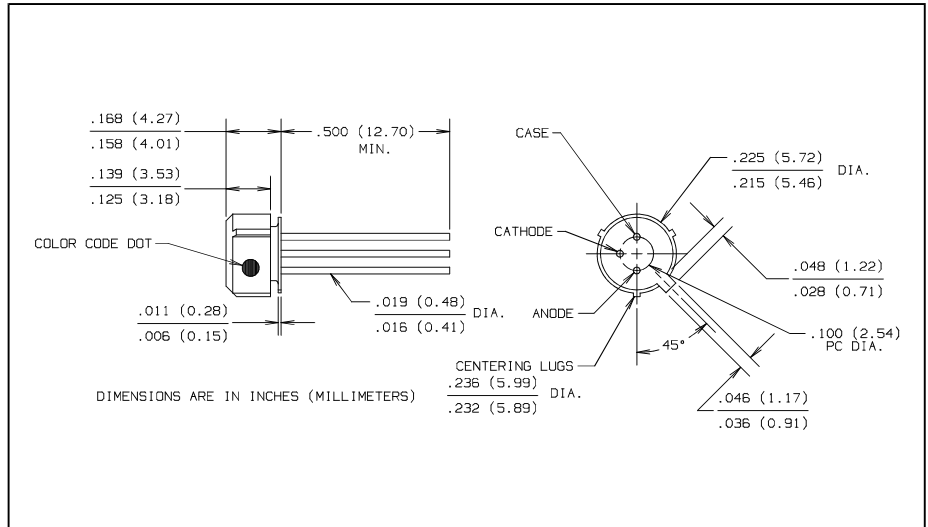


# Fiber Optic GaAlAs High Speed LED

## Types OPF395A, OPF395B, OPF395C, OPF395D

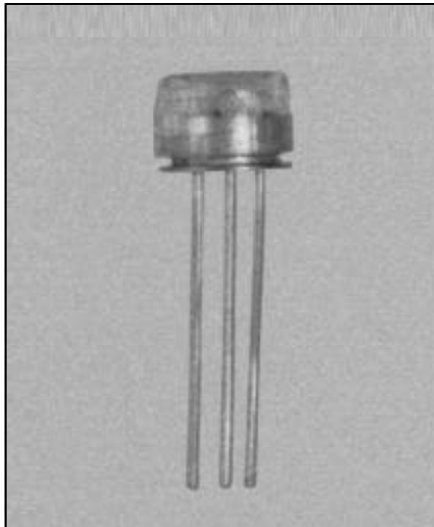

### Features

- Electrically isolated plastic cap package
- High radiant output for fiber optic applications
- High speed
- Designed to self align in the 0.228 inch diameter bore of standard fiber optic receptacles. Press fit simplifies component installation.

### Description

The OPF395 series LED provides fiber optic users with high coupled power and wide bandwidth in a low cost package.

The LED's are designed to interface with multimode optical fibers from 50/125 to 200/300 microns.

### Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Reverse Voltage	1.0 V
Continuous Forward Current	100 mA <sup>(4)</sup>
Storage Temperature Range	-55°C to +115°C
Operating Temperature Range	-40°C to +100°C
Lead Soldering Temperature [1/16 inch (1.6 mm) from case for 5 sec. with soldering iron]	240°C <sup>(1)</sup>

#### Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 sec. max when flow soldering.
- (2) Graded index fiber, 50  $\mu\text{m}$  core, N.A. = 0.20.
- (3) To convert radiant power output to dBm, use the following expression:  $\text{dBm} = 10 \log (\mu\text{W}/1000)$ .
- (4) Derate linearly @ 1.0 mA/ $^\circ\text{C}$  above 25°C.
- (5) Prebias @ 5 mA current.

### LED Burn-in

All LED's are subject to 100% burn-in testing. Test conditions are 96 hours at 100 mA continuous current in 25°C ambient.

### TYPICAL COUPLED POWER into OPTICAL FIBER

Typical Coupled Power $I_F = 100 \text{ mA} @ 25^\circ\text{C}$						
Fiber	Refractive Index	N.A.	OPF395D	OPF395C	OPF395B	OPF395A
50/125 $\mu\text{m}$	Graded	0.20	7.5 $\mu\text{W}$	12.5 $\mu\text{W}$	18 $\mu\text{W}$	25 $\mu\text{W}$
62.5/125 $\mu\text{m}$	Graded	0.28	27 $\mu\text{W}$	35 $\mu\text{W}$	45 $\mu\text{W}$	75 $\mu\text{W}$
100/140 $\mu\text{m}$	Graded	0.29	58 $\mu\text{W}$	85 $\mu\text{W}$	115 $\mu\text{W}$	170 $\mu\text{W}$
200/300 $\mu\text{m}^*$	Step	0.41	290 $\mu\text{W}$	450 $\mu\text{W}$	545 $\mu\text{W}$	650 $\mu\text{W}$

\*PCS - Plastic Clad Silica


# Types OPF395A, OPF395B, OPF395C, OPF395D

Electrical Characteristics ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

SYMBOL	PARAMETER	DOT	MIN	TYP	MAX	UNITS	TEST CONDITIONS
$P_O$	Radiant Power Output	OPF395D (Silver)	5.0	7.5		$\mu\text{W}$	$I_F = 100\text{ mA}^{(2)}$
		OPF395C (Black)	10.0	12.5			
		OPF395B (Green)	15.0	18.0			
		OPF395A (Orange)	20.0	25.0			
$V_F$	Forward Voltage			1.8	2.0	V	$I_F = 100\text{ mA}$
$\lambda_p$	Peak Output Wavelength		830	850	870	nm	$I_F = 50\text{ mA}$
B	Spectral Bandwidth Between Half Power Points			35		nm	$I_F = 50\text{ mA}$
$t_r$	Output Rise Time			3.5	4.5	ns	$I_F = 100\text{ mA}, 10\%-90\%^{(5)}$
$t_f$	Output Fall Time			3.5	4.5	ns	$I_F = 100\text{ mA}, 90\%-10\%^{(5)}$

## Typical Performance Curves

Relative Coupled Power vs. Forward Current

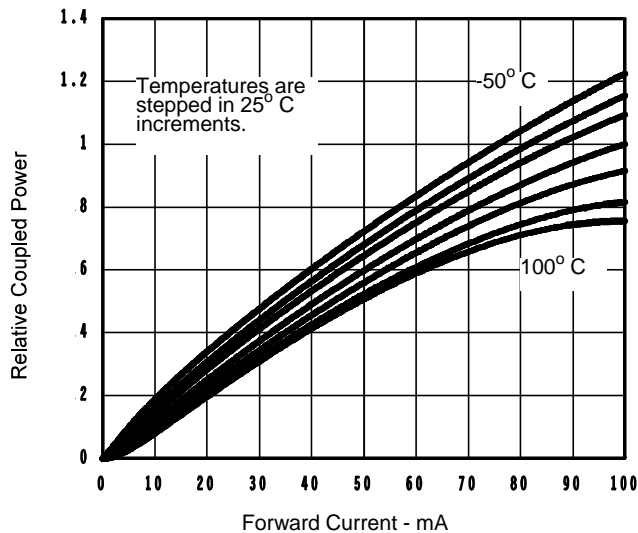

Forward Voltage vs. Forward Current

