

## Zener diode

### Features

1. Low leakage
2. High reliability

### Applications

Voltage stabilization

### Construction

Silicon epitaxial planar



### Absolute Maximum Ratings

$T_j=25^{\circ}\text{C}$

Parameter	Test Conditions	Type	Symbol	Value	Unit
Power dissipation	$R_{thJA} \leq 300\text{K/W}$		$P_V$	500	mW
Junction temperature			$T_j$	175	$^{\circ}\text{C}$
Storage temperature range			$T_{stg}$	-65~+175	$^{\circ}\text{C}$

### Maximum Thermal Resistance

$T_j=25^{\circ}\text{C}$

Parameter	Test Conditions	Symbol	Value	Unit
Junction ambient	on PC board 50mm×50mm×1.6mm	$R_{thJA}$	500	K/W

## Electrical Characteristics


T<sub>j</sub>=25°C

Type	Zener voltage				Operating resistance		Rising operating resistance		Reverse current	
	Rank	V <sub>z</sub> (V)		I <sub>z</sub> (mA)	Z <sub>zt</sub> (Ω)		Z <sub>zk</sub> (Ω)		I <sub>R</sub> (μA)	
		Min.	Max.		Max.	I <sub>z</sub> (mA)	Max.	I <sub>z</sub> (mA)	Max.	V <sub>R</sub> (V)
Z 2.0	A	1.88	2.10	20	140	20	2000	1	120	0.5
	B	2.02	2.20							
Z 2.2	A	2.12	2.30	20	120	20	2000	1	120	0.7
	B	2.22	2.41							
Z 2.4	A	2.33	2.52	20	100	20	2000	1	120	1.0
	B	2.43	2.63							
Z 2.7	A	2.54	2.75	20	100	20	1000	1	120	1.0
	B	2.69	2.91							
Z 3.0	A	2.85	3.07	20	80	20	1000	1	50	1.0
	B	3.01	3.22							
Z 3.3	A	3.16	3.38	20	70	20	1000	1	20	1.0
	B	3.32	3.53							
Z 3.6	A	3.46	3.69	20	60	20	1000	1	10	1.0
	B	3.60	3.84							
Z 3.9	A	3.74	4.01	20	50	20	1000	1	5	1.0
	B	3.89	4.16							
Z 4.3	A	4.04	4.29	20	40	20	1000	1	5	1.0
	B	4.17	4.43							
	C	4.30	4.57							
Z 4.7	A	4.44	4.68	20	25	20	900	1	5	1.0
	B	4.55	4.80							
	C	4.68	4.93							
Z 5.1	A	4.81	5.07	20	20	20	800	1	5	1.5
	B	4.94	5.20							
	C	5.09	5.37							
Z 5.6	A	5.28	5.55	20	13	20	500	1	5	2.5
	B	5.45	5.73							
	C	5.61	5.91							
Z 6.2	A	5.78	6.09	20	10	20	300	1	5	3.0
	B	5.96	6.27							
	C	6.12	6.44							
Z 6.8	A	6.29	6.63	20	8	20	150	0.5	2	3.5
	B	6.49	6.83							
	C	6.66	7.01							
Z 7.5	A	6.85	7.22	20	8	20	120	0.5	0.5	4.0
	B	7.07	7.45							
	C	7.29	7.67							
Z 8.2	A	7.53	7.92	20	8	20	120	0.5	0.5	5.0
	B	7.78	8.19							
	C	8.03	8.45							
Z 9.1	A	8.29	8.73	20	8	20	120	0.5	0.5	6.0
	B	8.57	9.01							
	C	8.83	9.30							

Type	Zener voltage				Operating resistance		Rising operating resistance		Reverse current	
	Rank	Vz (V)		Iz (mA)	Zzt (Ω)		Zzk (Ω)		IR (μA)	
		Min.	Max.		Max.	Iz (mA)	Max.	Iz (mA)	Max.	VR (V)
Z 10	A	9.12	9.59	20	8	20	120	0.5	0.2	7.0
	B	9.41	9.90							
	C	9.70	10.20							
	D	9.94	10.44							
Z 11	A	10.18	10.71	10	10	10	120	0.5	0.2	8.0
	B	10.50	11.05							
	C	10.82	11.38							
Z 12	A	11.13	11.71	10	12	10	110	0.5	0.2	9.0
	B	11.44	12.03							
	C	11.74	12.35							
Z 13	A	12.11	12.75	10	14	10	110	0.5	0.2	10
	B	12.55	13.21							
	C	12.99	13.66							
Z 15	A	13.44	14.13	10	16	10	110	0.5	0.2	11
	B	13.89	14.62							
	C	14.35	15.09							
Z 16	A	14.80	15.57	10	18	10	150	0.5	0.2	12
	B	15.25	16.04							
	C	15.69	16.51							
Z 18	A	16.22	17.06	10	23	10	150	0.5	0.2	13
	B	16.82	17.70							
	C	17.42	18.33							
Z 20	A	18.20	18.96	10	28	10	200	0.5	0.2	15
	B	18.63	19.59							
	C	19.23	20.22							
	D	19.72	20.72							
Z 22	A	20.15	21.20	5	30	5	200	0.5	0.2	17
	B	20.64	21.71							
	C	21.08	22.17							
	D	21.52	22.63							
Z 24	A	22.05	23.18	5	35	5	200	0.5	0.2	19
	B	22.61	23.77							
	C	23.12	24.13							
	D	23.63	24.85							
Z 27	A	24.26	25.52	5	45	5	250	0.5	0.2	21
	B	24.97	26.26							
	C	25.63	26.95							
	D	26.29	27.64							
Z 30	A	26.99	28.39	5	55	5	250	0.5	0.2	23
	B	27.70	29.13							
	C	28.36	29.82							
	D	29.02	30.51							

Type	Zener voltage				Operating resistance		Rising operating resistance		Reverse current	
	Rank	Vz (V)		Iz (mA)	Zzt (Ω)		Zzk (Ω)		IR (μA)	
		Min.	Max.		Max.	Iz (mA)	Max.	Iz (mA)	Max.	VR (V)
Z 33	A	29.68	31.22	5	65	5	250	0.5	0.2	25
	B	30.32	31.88							
	C	30.90	32.50							
	D	31.49	33.11							
Z 36	A	32.14	33.79	5	75	5	250	0.5	0.2	27
	B	32.79	34.49							
	C	33.40	35.13							
	D	34.01	35.77							
Z 39	A	34.68	36.47	5	85	5	250	0.5	0.2	30
	B	35.36	37.19							
	C	36.00	37.85							
	D	36.63	38.52							

### Dimensions in mm

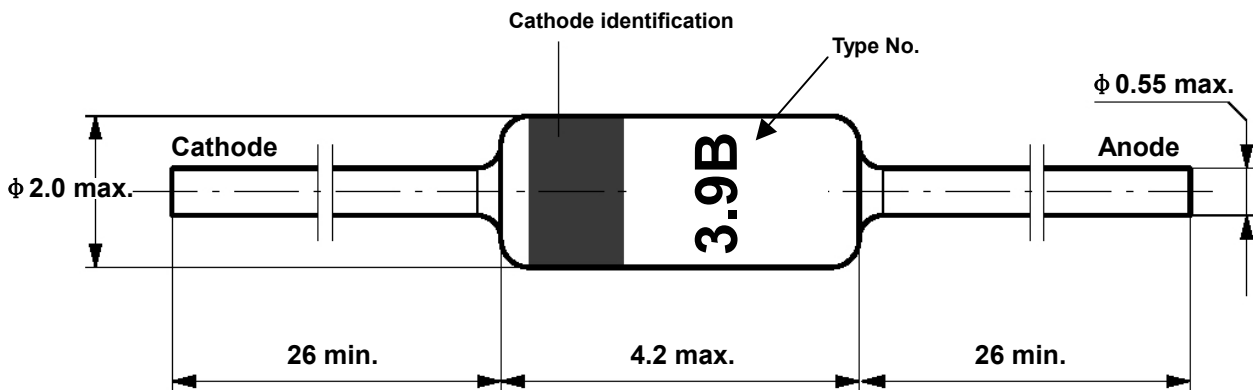

Standard Glass Case  
JEDEC DO 35