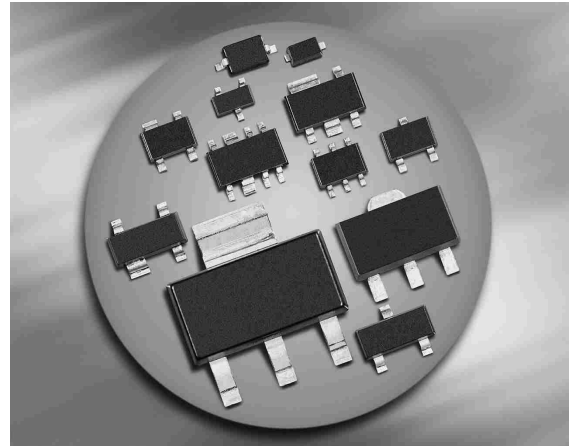










**Silicon Schottky Diodes**

- For mixer applications in the VHF / UHF range
- For high-speed switching applications


**BAT68**

**BAT68-02L**

**BAT68-04  
BAT68-04W**

**BAT68-05  
BAT68-05W**

**BAT68-06  
BAT68-06W**

**BAT68-07  
BAT68-07W**

**BAT68-08S**

**BAT68-09S**

**ESD: Electrostatic discharge sensitive device, observe handling precaution!**

Type	Package	Configuration	$L_S$ (nH)	Marking
BAT68	SOT23	single	1.8	83s
BAT68-02L*	TSLP-2-1	single, leadless	0.4	83
BAT68-04	SOT23	series	1.8	84s
BAT68-04W	SOT323	series	1.4	84s
BAT68-05	SOT23	common cathode	1.8	85s
BAT68-05W	SOT323	common cathode	1.4	85s
BAT68-06	SOT23	common anode	1.8	86s
BAT68-06W	SOT323	common anode	1.4	86s
BAT68-07	SOT143	parallel pair	2	87s
BAT68-07W	SOT343	parallel pair	1.6	87s
BAT68-08S	SOT363	parallel triple	1.4	83s
BAT68-09S*	SOT363	parallel pair, high isolation	1.6	89s

\* Preliminary Data

**Maximum Ratings at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**

Parameter	Symbol	Value	Unit
Diode reverse voltage	$V_R$	8	V
Forward current	$I_F$	130	mA
Total power dissipation	$P_{\text{tot}}$		mW
BAT68, $T_S \leq 77^\circ\text{C}$		150	
BAT68-02L, $T_S \leq 114^\circ\text{C}$		150	
BAT68-04, BAT68-06, BAT68-07, $T_S \leq 61^\circ\text{C}$		150	
BAT68-04W/-06W/-08S/-09S, $T_S \leq 92^\circ\text{C}$		150	
BAT68-05, $T_S \leq 46^\circ\text{C}$		150	
BAT68-07W, $T_S \leq 89^\circ\text{C}$		150	
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature	$T_{\text{stg}}$	-55 ... 150	

**Thermal Resistance**

Parameter	Symbol	Value	Unit
Junction - soldering point <sup>1)</sup>	$R_{\text{thJS}}$		K/W
BAT68		$\leq 490$	
BAT68-02L		$\leq 240$	
BAT68-04, BAT68-06, BAT68-07		$\leq 590$	
BAT68-04W-BAT68-06W, BAT68-08S		$\leq 390$	
BAT68-05		$\leq 690$	
BAT68-07W		$\leq 410$	
BAT68-09S		$\leq \text{tdb}$	


<sup>1</sup>For calculation of  $R_{\text{thJA}}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC Characteristics</b>					
Breakdown voltage $I_{(BR)} = 10 \mu\text{A}$	$V_{(BR)}$	8	-	-	V
Reverse current $V_R = 1 \text{ V}$ $V_R = 1 \text{ V}, T_A = 60^\circ\text{C}$	$I_R$	- -	- -	0.1 1.2	$\mu\text{A}$
Forward voltage $I_F = 1 \text{ mA}$ $I_F = 10 \text{ mA}$	$V_F$	- 340	318 390	340 500	mV
<b>AC Characteristics</b>					
Diode capacitance $V_R = 0, f = 1 \text{ MHz}$	$C_T$	-	-	1	pF
Differential forward resistance $I_F = 5 \text{ mA}, f = 10 \text{ kHz}$	$R_F$	-	-	10	$\Omega$


**Diode capacitance  $C_T = f(V_R)$**

$f = 1\text{MHz}$

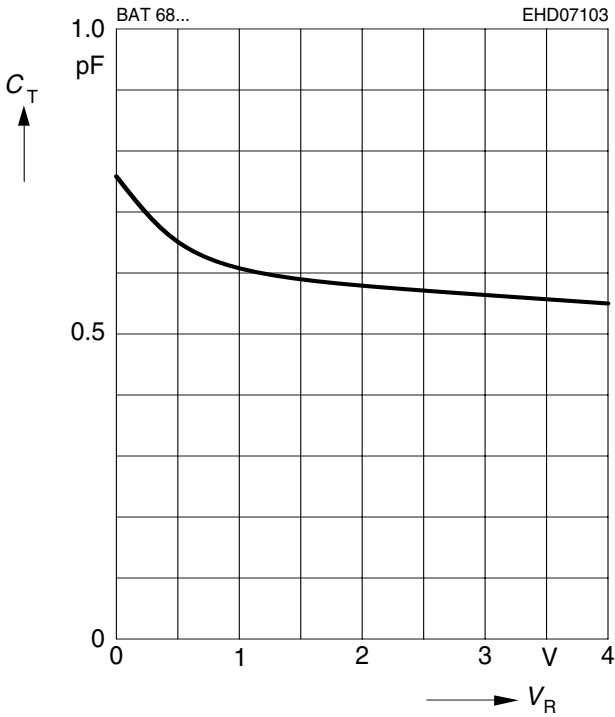


**Differential forward resistance  $r_f = f(I_F)$**

$f = 10\text{kHz}$

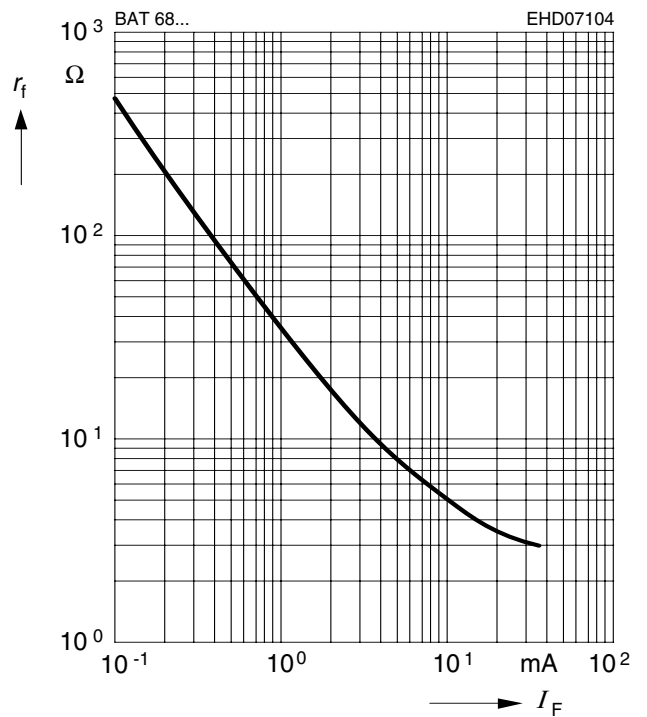


**Reverse current  $I_R = f(V_R)$**

$T_A = \text{Parameter}$

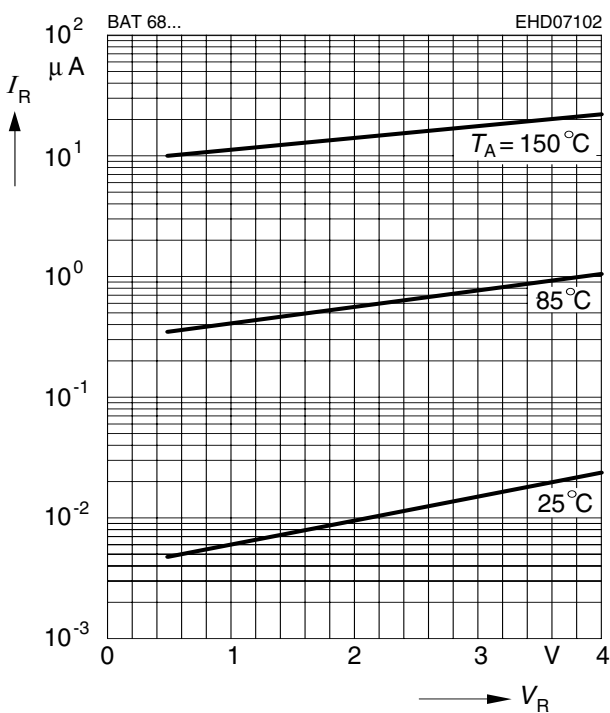


**Forward current  $I_F = f(V_F)$**

$T_A = \text{Parameter}$

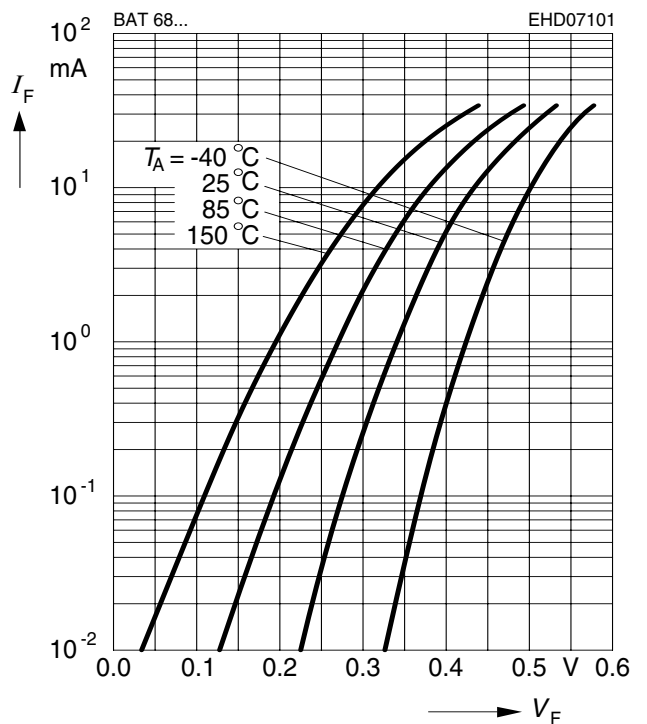


**Forward current  $I_F = f(T_S)$**

BAT68

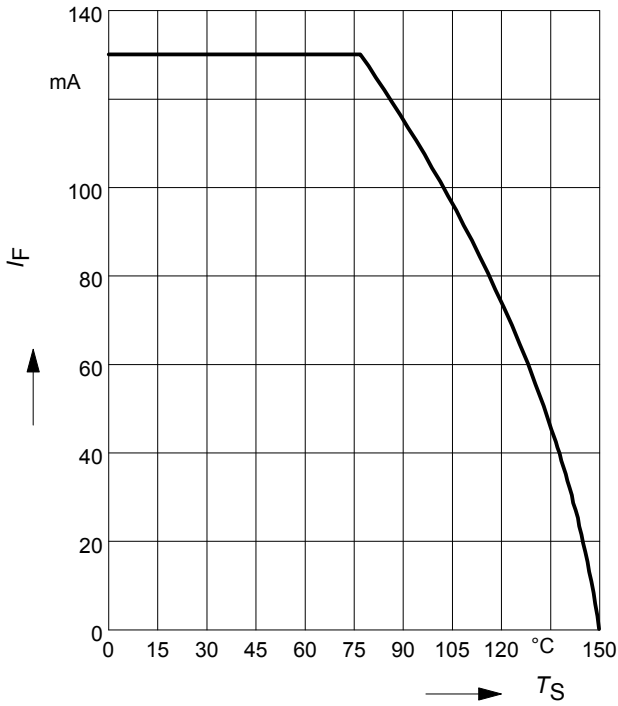


**Forward current  $I_F = f(T_S)$**

BAT68-02L

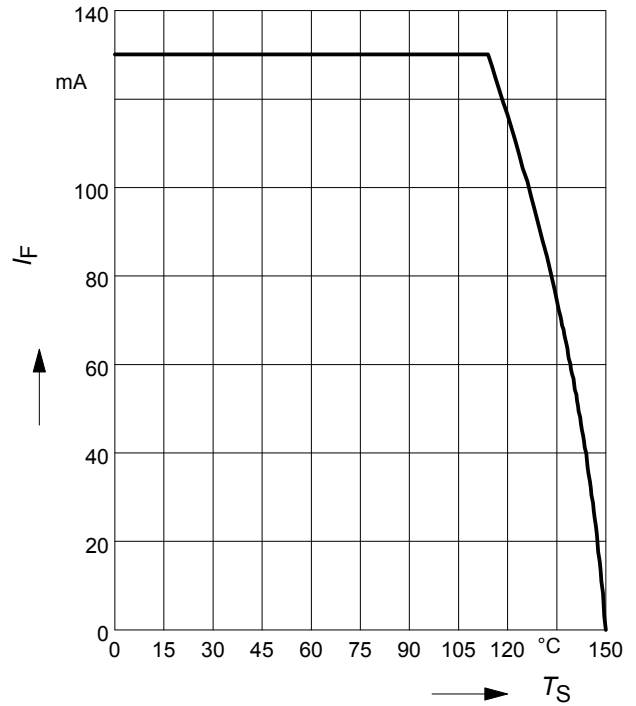

**Forward current  $I_F = f(T_S)$**


BAT68-04, BAT68-06, BAT68-07

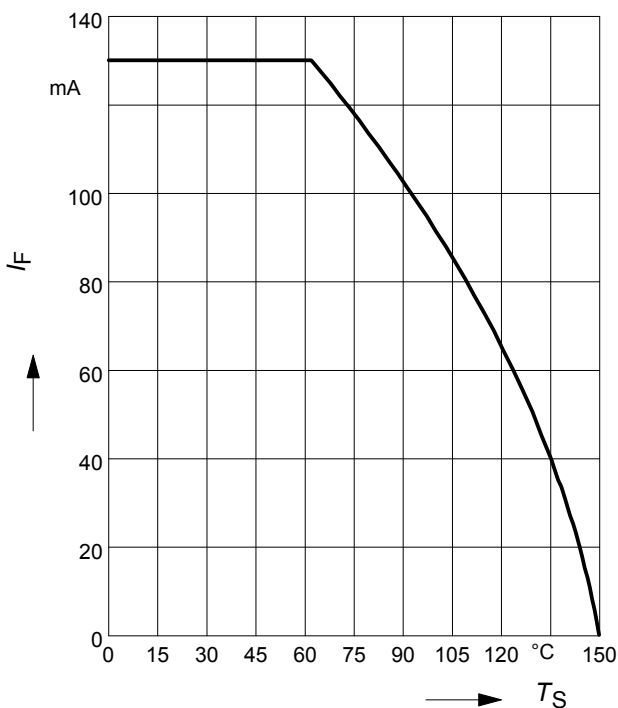

**Forward current  $I_F = f(T_S)$**


BAT68-04W-BAT68-06W, BAT68-08S

BAT68-09S

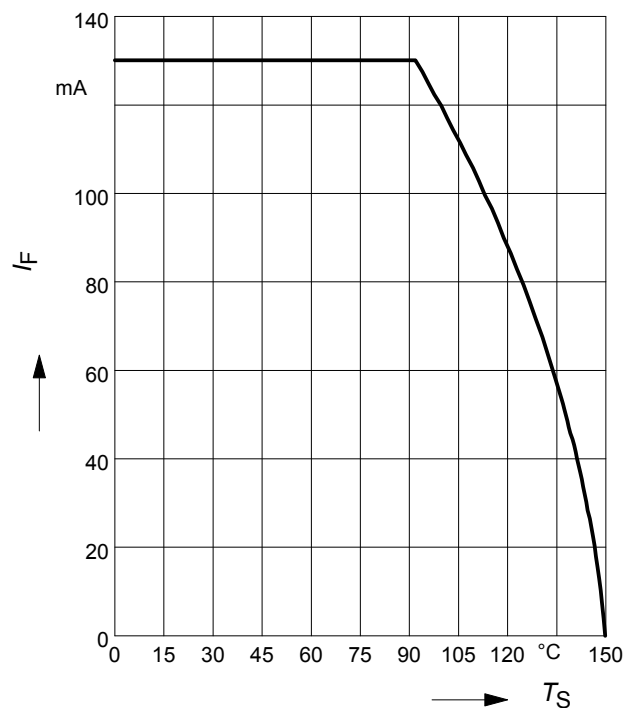


**Forward current  $I_F = f(T_S)$**

BAT68-05

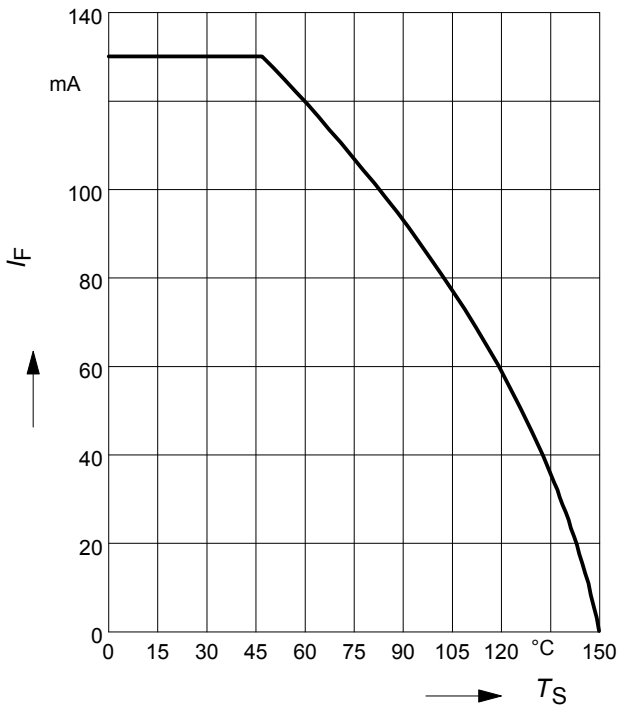


**Forward current  $I_F = f(T_S)$**

BAT68-07W

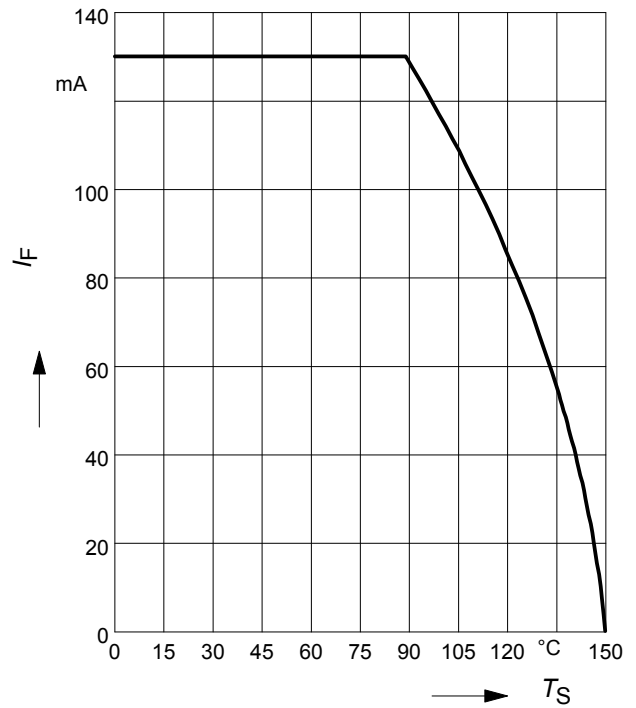

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BAT68-02L

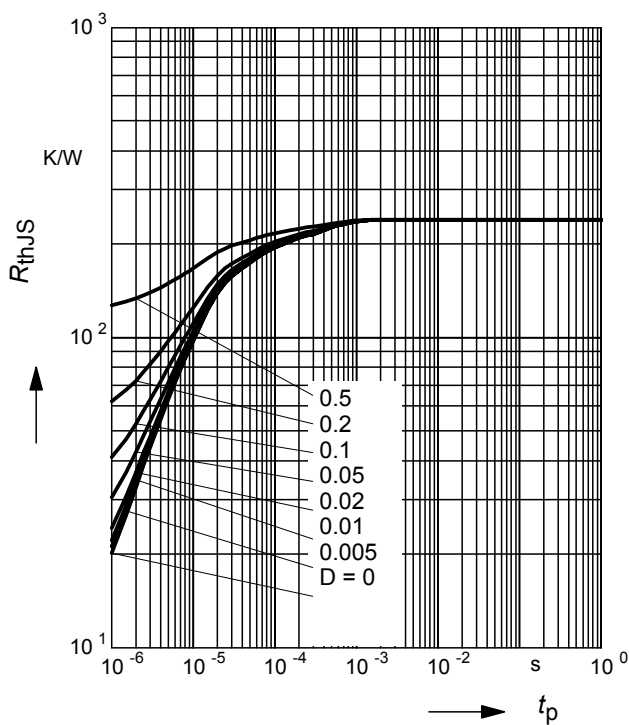

**Permissible Pulse Load**


$I_{Fmax} / I_{FDC} = f(t_p)$

BAT68-02L

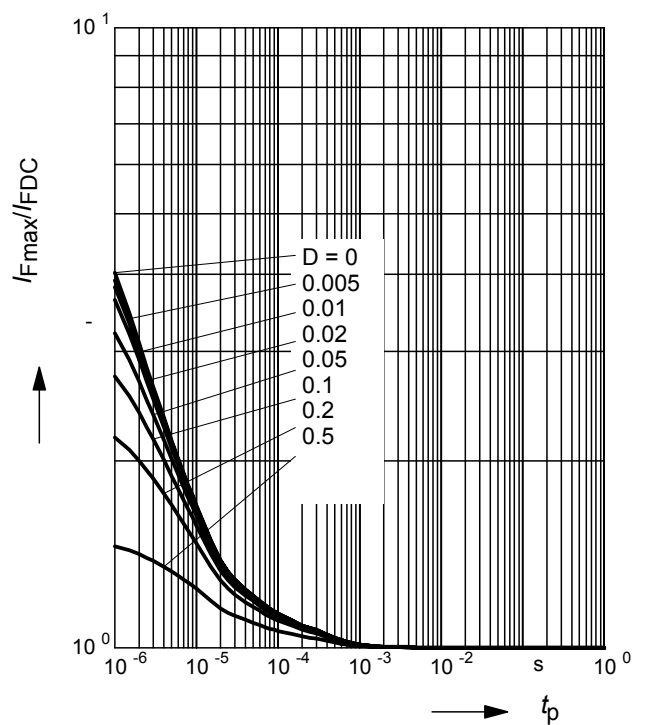

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BAT68-04W-BAT68-06W

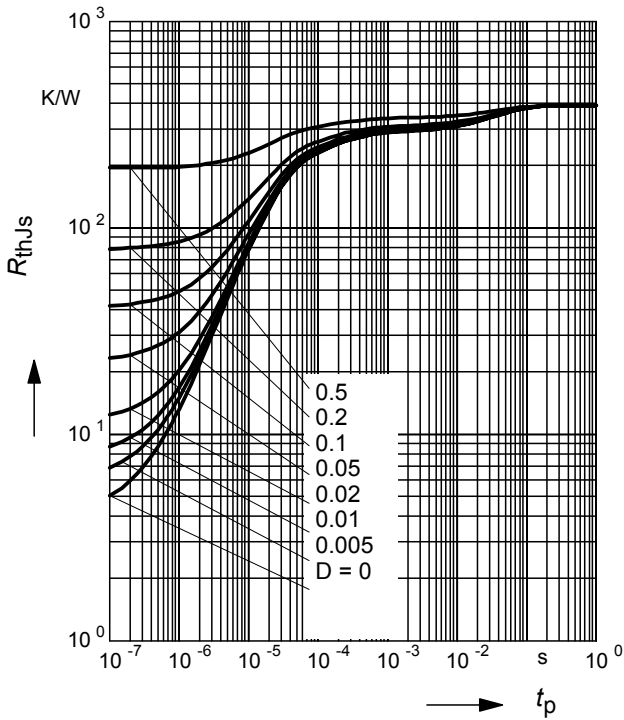

**Permissible Pulse Load**


$I_{Fmax} / I_{FDC} = f(t_p)$

BAT68-04W-BAT68-06W

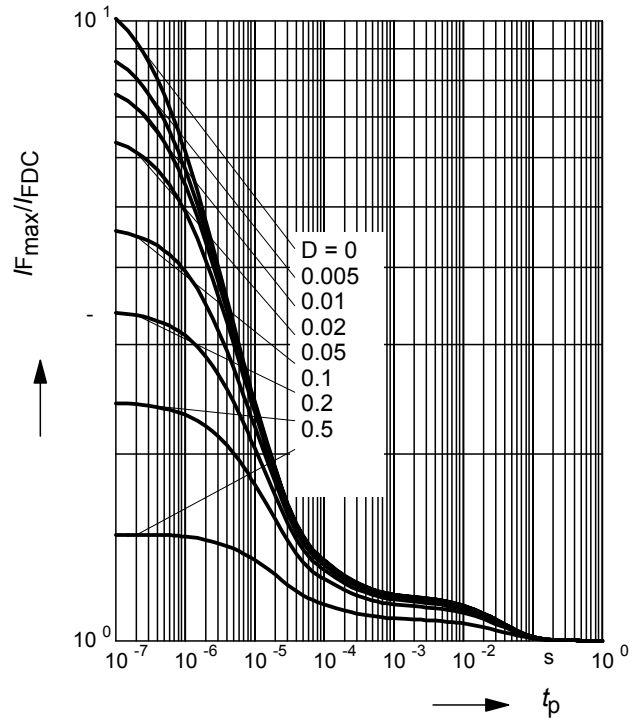

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BAT68-07W

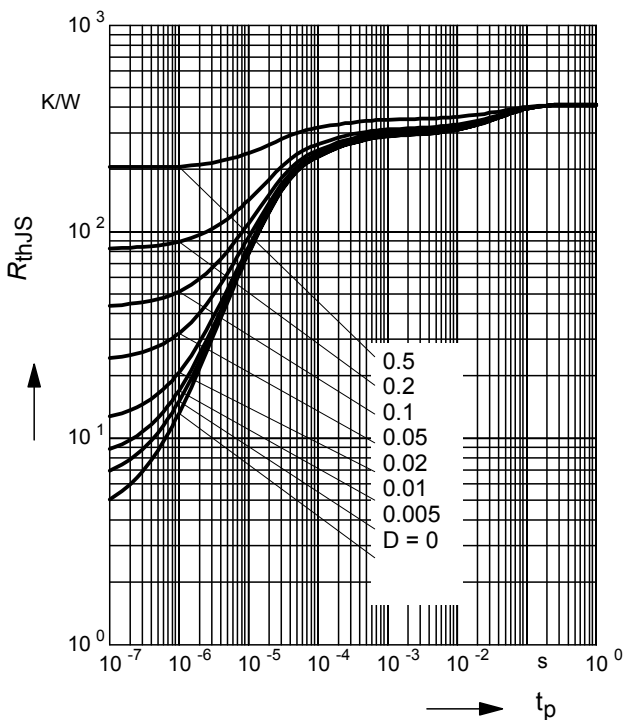

**Permissible Pulse Load**

$I_{Fmax} / I_{FDC} = f(t_p)$


BAT68-07W

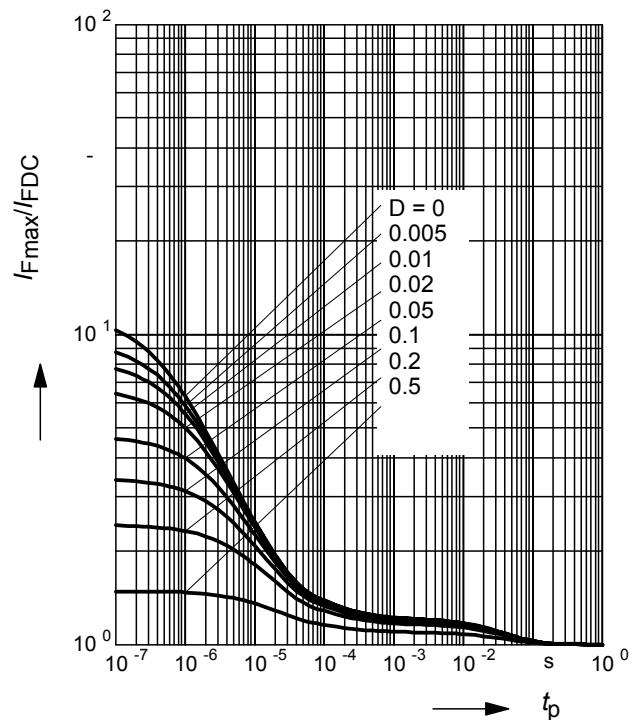

Rectifier voltage  $V_{out} = f(V_{in})$

$f = 900\text{MHz}$

$R_L =$  Parameter in  $k\Omega$

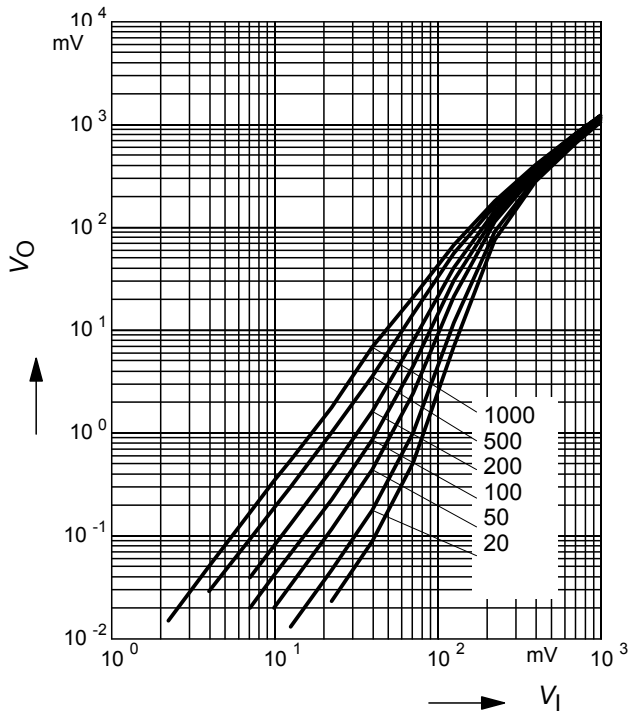

Testcircuit

