



1.0 Hz to 102.4 kHz  
8-Bit Programmable

2" x 4" Range Switch  
4-Pole Filters

**Description**

The R854 Series are digitally programmable, 4-pole low-pass and high-pass active filters that contain a low and a high programmable frequency range, with each range tunable over a 256:1 ratio. R854 filters are available with any two of five standard factory-set tuning ranges or 8-bit custom ranges from 1.0 Hz to 102.4 kHz. These units contain 8 CMOS logic inputs that can be operated in a transparent or latching mode and 1 logic input for range selection.

All R854 Series models are convenient, easy to use fully finished filters which require no external components or adjustments. They feature low harmonic distortion, and precision phase and amplitude characteristics. R854 filters operate from non-critical ±12 to ±18 Vdc power supplies, have a 10 kΩ (min.) input impedance, a 10 Ω (max.) output impedance.

**Features/Benefits:**

- Digitally programmable corner frequency allows selecting cut-off frequencies specific to each application.
- Plug-in ready-to-use, reducing engineering design and manufacturing cycle time.
- Factory-set tuning range, no external clocks or adjustments needed.
- Broad range of transfer characteristics and corner frequencies to meet a wide range of applications.
- Low profile design, ideal for rack mount installations.

**Applications**

- Anti-alias filtering
- Data acquisition systems
- Communication systems and electronics
- Medical electronics equipment and research
- Aerospace, navigation and sonar applications
- Sound and vibration testing
- Real and compressed time data analysis
- Noise elimination
- Signal reconstruction



<b>Programmable Specifications</b>	<b>Page</b>
Digital Tuning & Control . . . . .	2

<b>Available Low-Pass Models:</b>	
R854L4B 4-pole Butterworth . . . . .	3
R854L4L 4-pole Bessel . . . . .	3
R854L8Y2 4-pole Cheby (0.2 dB Ripple) . . . . .	3
R854L8Y5 4-pole Cheby (0.5 dB Ripple) . . . . .	3

<b>Available High-Pass Models:</b>	
R854H8B 4-pole Butterworth . . . . .	4
R854H8Y2 4-pole Cheby (0.2 dB Ripple) . . . . .	4
R854H8Y5 4-pole Cheby (0.5 dB Ripple) . . . . .	4

<b>General Specifications:</b>	
Ordering information . . . . .	5
Pin-out/package data . . . . .	5

## Range Switch 8-Bit Programmable Filters

## Digital Tuning & Control Characteristics

### Digital Tuning Characteristics

The digital tuning interface circuits are two 4042 quad CMOS latches which accept the following CMOS-compatible inputs: eight tuning bits (D<sub>0</sub> - D<sub>7</sub>), a range selection bit (R), a latch strobe bit (C), and a transition polarity bit (P).

Filter tuning follows the tuning equation given below:

$$f_c = (f_{max}/256) [ 1 + D_7 \times 2^7 + D_6 \times 2^6 + D_5 \times 2^5 + D_4 \times 2^4 + D_3 \times 2^3 + D_2 \times 2^2 + D_1 \times 2^1 + D_0 \times 2^0 ]$$

where D<sub>1</sub> - D<sub>7</sub> = "0" or "1", and

f<sub>max</sub> = Maximum tuning frequency;

f<sub>c</sub> = corner frequency;

R = 0, Maximum low range

R = 1, Maximum

Minimum tunable frequency = f<sub>max</sub>/256 (D<sub>0</sub> thru D<sub>7</sub> = 0);

Minimum frequency step (Resolution) = f<sub>max</sub>/256

### Data Control Specifications

#### Data Control Lines

Functions	Latch Strobe (C) Transition Polarity (P)
-----------	---

#### Data Control Modes

Mode 1	P = 0; C = 0	frequency follows input codes
	P = 0; C = 0↑	frequency latched on rising edge
Mode 2	P = 1; C = 1	frequency follows input codes
	P = 1; C = 1↓	frequency latched on falling edge

#### Input Data Levels (CMOS Logic)

Input Voltage (V<sub>s</sub> = 15 Vdc)

Low Level In	0 Vdc min.	4 Vdc max.
High Level In	11 Vdc min.	15 Vdc max.

Input Current

High Level In	- 10 <sup>-5</sup> μA typ.	-1 mA max.
Low Level In	+10 <sup>-5</sup> μA typ.	+1 μA max.

Input Capacitance 5 pF typ 7.5 pF max.

Latch Response

Data Set Up Time <sup>1</sup>	25 nS
Data Hold Time <sup>2</sup>	50 nS
Strobe Pulse Width	80 nS min.

#### Input Data Format Frequency Select Bits

Positive Logic Logic "1" = +V<sub>s</sub>  
Logic "0" = Gnd


Bit Weighting

D <sub>0</sub>	LSB (least significant bit)
D <sub>7</sub>	MSB (most significant bit)

Frequency Range 256 : 1, Binary Weighted

### Pin-Out Key

IN	Analog Input Signal	D <sub>7</sub> Tuning Bit 7 (MSB)
OUT	Analog Output Signal	D <sub>6</sub> Tuning Bit 6
GND	Power and Signal Return	D <sub>5</sub> Tuning Bit 5
"P"	Transition Polarity Bit	D <sub>4</sub> Tuning Bit 4
"C"	Tuning Strobe Bit	D <sub>3</sub> Tuning Bit 3
+V <sub>s</sub>	Supply Voltage, Positive	D <sub>2</sub> Tuning Bit 2
-V <sub>s</sub>	Supply Voltage, Negative	D <sub>1</sub> Tuning Bit 1
Os	Optional Offset Adjustment	D <sub>0</sub> Tuning Bit 0 (LSB)
R	Range Switch Adjustment	

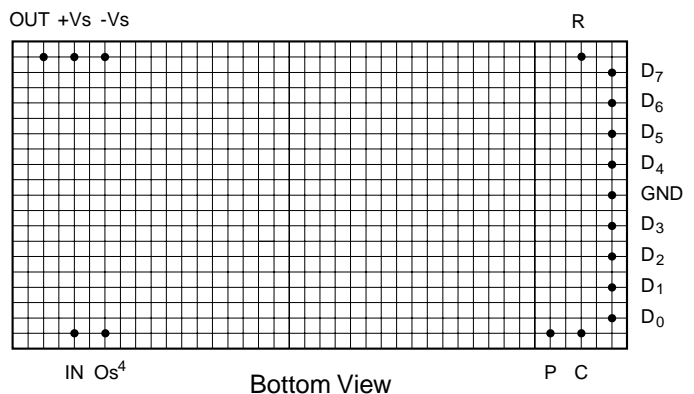

MSB	---	---	---	---	---	---	LSB	Bit Weight
27	26	25	24	23	22	21	20	f <sub>c</sub> Corner Frequency
D <sub>7</sub>	D <sub>6</sub>	D <sub>5</sub>	D <sub>4</sub>	D <sub>3</sub>	D <sub>2</sub>	D <sub>1</sub>	D <sub>0</sub>	
0	0	0	0	0	0	0	0	f <sub>max</sub> /256
0	0	0	0	0	0	0	1	f <sub>max</sub> /128
0	0	0	0	0	0	1	1	f <sub>max</sub> /64
0	0	0	0	0	1	1	1	f <sub>max</sub> /32
0	0	0	0	1	1	1	1	f <sub>max</sub> /16
0	0	0	1	1	1	1	1	f <sub>max</sub> /8
0	0	1	1	1	1	1	1	f <sub>max</sub> /4
0	1	1	1	1	1	1	1	f <sub>max</sub> /2
1	1	1	1	1	1	1	1	f <sub>max</sub>

Notes:

1. Frequency data must be present before occurrence of strobe edge.
2. Frequency data must be present after occurrence of strobe edge.



**Range Switch  
8-Bit Programmable**

**4-Pole  
Low-Pass Filters**

Model	R854L8B	R854L8L	R854L8Y2	R854L8Y5
<b>Product Specifications</b>				
<b>Transfer Function</b>	4-Pole, Butterworth	4-Pole, Bessel	4-Pole, Chebychev, 0.2 dB Ripple	4-Pole, Chebychev, 0.5 dB Ripple
<b>Size</b>	4.0" x 2.0" x 0.6"	4.0" x 2.0" x 0.6"	4.0" x 2.0" x 0.6"	4.0" x 2.0" x 0.6"
<b>Range f<sub>c</sub></b>	1.0 Hz to 102.4 kHz	1.0 Hz to 102.4 kHz	1.0 Hz to 102.4 kHz	1.0 Hz to 102.4 kHz
<b>Theoretical Transfer Characteristics</b>	Appendix A Page 7	Appendix A Page 2	Appendix A Page 12	Appendix A Page 15
<b>Passband Ripple (theoretical)</b>	0.0 dB	0.0 dB	0.2 dB	0.5 dB
<b>DC Voltage Gain (non-inverting)</b>	0 ± 0.1 dB max. 0 ± 0.05 dB typ.	0 ± 0.1 dB max. 0 ± 0.05 dB typ.	0 ± 0.1 dB max. 0 ± 0.05 dB typ.	0 ± 0.1 dB max. 0 ± 0.05 dB typ.
<b>Stopband Attenuation Rate</b>	24 dB/octave	24 dB/octave	24 dB/octave	24 dB/octave
<b>Cutoff Frequency Stability Amplitude Phase</b>	f <sub>c</sub> ± 2% max. ± 0.01% /°C - 3 dB -180°	f <sub>c</sub> ± 2% max. ± 0.01% /°C - 3 dB -121°	f <sub>c</sub> ± 2% max. ± 0.01% /°C - 3 dB - 231°	f <sub>c</sub> ± 2% max. ± 0.01% /°C - 3 dB -245°
<b>Filter Attenuation (theoretical)</b>	0.67 dB      0.80 f <sub>c</sub> 3.01 dB      1.00 f <sub>c</sub> 30.0 dB      2.37 f <sub>c</sub> 40.0 dB      3.16 f <sub>c</sub>	1.86 dB      0.80 f <sub>c</sub> 3.01 dB      1.00 f <sub>c</sub> 30.0 dB      3.50 f <sub>c</sub> 40.0 dB      4.72 f <sub>c</sub>	-0.20 dB      0.80 f <sub>c</sub> 3.01 dB      1.00 f <sub>c</sub> 30.0 dB      1.89 f <sub>c</sub> 40.0 dB      2.46 f <sub>c</sub>	-0.43 dB      0.80 f <sub>c</sub> 3.01 dB      1.00 f <sub>c</sub> 30.0 dB      1.80 f <sub>c</sub> 40.0 dB      2.33 f <sub>c</sub>
<b>Phase Match<sup>1</sup></b>	0 - 0.8 f <sub>c</sub> ± 2° max. ± 1° typ. 0.8 f <sub>c</sub> - 1.0 f <sub>c</sub> ± 3° max. ± 1.5° typ.	0 - f <sub>c</sub> ± 2° max. ± 1° typ.	0 - 0.8 f <sub>c</sub> ± 2° max. ± 1° typ. 0.8 f <sub>c</sub> - 1.0 f <sub>c</sub> ± 3° max. ± 1.5° typ.	0 - 0.8 f <sub>c</sub> ± 2° max. ± 1° typ. 0.8 f <sub>c</sub> - 1.0 f <sub>c</sub> ± 3° max. ± 1.5° typ.
<b>Amplitude Accuracy (theoretical)</b>	0 - 0.8 f <sub>c</sub> ± 0.2 dB max. ± 0.1 dB typ. 0.8 f <sub>c</sub> - 1.0 f <sub>c</sub> ± 0.3 dB max. ± 0.15 dB typ.	0 - f <sub>c</sub> ± 0.2 dB max. ± 0.1 dB typ.	0 - 0.8 f <sub>c</sub> ± 0.2 dB max. ± 0.1 dB typ. 0.8 f <sub>c</sub> - 1.0 f <sub>c</sub> ± 0.3 dB max. ± 0.15 dB typ.	0 - 0.8 f <sub>c</sub> ± 0.2 dB max. ± 0.1 dB typ. 0.8 f <sub>c</sub> - 1.0 f <sub>c</sub> ± 0.3 dB max. ± 0.15 dB typ.
<b>Total Harmonic Distortion @ 1 kHz</b>	< - 100 dB typ.	< - 100 dB typ.	< - 88 dB typ.	< - 88 dB typ.
<b>Wide Band Noise (5 Hz - 2 MHz)</b>	200 μVrms typ.	200 μVrms typ.	200 μVrms typ.	200 μVrms typ.
<b>Narrow Band Noise (5 Hz - 100 kHz)</b>	50 μVrms typ.	50 μVrms typ.	50 μVrms typ.	50 μVrms typ.
<b>Filter Mounting Assembly</b>	FMA-03A	FMA-03A	FMA-03A	FMA-03A

1. Unit to unit match for the same transfer function, set to the same frequency and operating configuration, and from the same manufacturing lot.



**Range Switch  
8-Bit Programmable**

**4-Pole  
High-Pass Filters**

Model	R854H8B	R854H8Y2	R854H8Y5	
<b>Product Specifications</b>				
<b>Transfer Function</b>	4-Pole, Butterworth	4-Pole, Chebychev, 0.2 dB Ripple	4-Pole, Chebychev, 0.5 dB Ripple	
<b>Size</b>	4.0" x 2.0" x 0.6"	4.0" x 2.0" x 0.6"	4.0" x 2.0" x 0.6"	
<b>Range <math>f_c</math></b>	1.0 Hz to 102.4 kHz	1.0 Hz to 102.4 kHz	1.0 Hz to 102.4 kHz	
<b>Theoretical Transfer Characteristics</b>	Appendix A Page 27	Appendix A Page 31	Appendix A Page 33	
<b>Passband Ripple (theoretical)</b>	0.0 dB	0.2 dB	0.50 dB	
<b>Voltage Gain (non-inverting)</b>	0 ± 0.2 dB to 100 kHz 0 ± 0.5 dB to 120 kHz	0 ± 0.2 dB to 100 kHz 0 ± 0.5 dB to 120 kHz	0 ± 0.2 dB to 100 kHz 0 ± 0.5 dB to 120 kHz	
<b>Power Bandwidth</b>	120 kHz	120 kHz	120 kHz	
<b>Small Signal Bandwidth</b>	(-6 dB) 1 MHz	(-6 dB) 1 MHz	(-6 dB) 1 MHz	
<b>Stopband Attenuation Rate</b>	24 dB/octave	24 dB/octave	24 dB/octave	
<b>Cutoff Frequency Stability Amplitude Phase</b>	$f_c$ ± 2% max. ± 0.01% /°C - 3 dB 180°	$f_c$ ± 2% max. ± 0.01% /°C - 3 dB 231°	$f_c$ ± 2% max. ± 0.01% /°C - 3 dB 245°	
<b>Filter Attenuation (theoretical)</b>	40 dB      0.31 $f_c$ 30 dB      0.42 $f_c$ 3.01 dB    1.00 $f_c$ 0.02 dB    2.00 $f_c$	40.0 dB      0.41 $f_c$ 30.0 dB      0.53 $f_c$ 3.01 dB      1.00 $f_c$ -0.07 dB     2.00 $f_c$	40.0 dB      0.43 $f_c$ 30.0 dB      0.56 $f_c$ 3.01 dB      1.00 $f_c$ -0.25 dB     2.00 $f_c$	
<b>Phase Match<sup>1</sup></b>	$f_c$ - 100 kHz ± 3° max. ± 1.5° typ.	$f_c$ - 100 kHz ± 3° max. ± 1.5° typ.	$f_c$ - 100 kHz ± 3° max. ± 1.5° typ.	
<b>Amplitude Accuracy (theoretical)</b>	1.00 - 1.25 $f_c$ ± 0.3 dB max. ± 0.15 dB typ. 1.25 $f_c$ -100 kHz ± 0.2 dB max. ± 0.1 dB typ.	1.00 - 1.25 $f_c$ ± 0.3 dB max. ± 0.15 dB typ. 1.25 $f_c$ -100 kHz ± 0.2 dB max. ± 0.1 dB typ.	1.00 - 1.25 $f_c$ ± 0.3 dB max. ± 0.15 dB typ. 1.25 $f_c$ -100 kHz ± 0.2 dB max. ± 0.1 dB typ.	
<b>Total Harmonic Distortion @ 1 kHz</b>	< - 100 dB typ.	< - 88 dB typ.	< - 88 dB typ.	
<b>Wide Band Noise</b>	400 µVrms typ.	400 µVrms typ.	400 µVrms typ.	
<b>Narrow Band Noise (5 Hz - 100 kHz)</b>	100 µVrms typ.	100 µVrms typ.	100 µVrms typ.	
<b>Filter Mounting Assembly</b>	FMA-03A	FMA-03A	FMA-03A	

1. Unit to unit match for the same transfer function, set to the same frequency and operating configuration, and from the same manufacturing lot.



## Specification

(25°C and Vs ± 15 Vdc)

## Pin-Out and Package Data Ordering Information

### Analog Input Characteristics<sup>1</sup>

Impedance	10 k Ω min.
Voltage Range	± 10 Vpeak
Max. Safe Voltage	±Vs

### Analog Output Characteristics

Impedance (Closed Loop)	1 Ω typ. 10 Ω max.
Linear Operating Range	±10V
Maximum Current <sup>2</sup>	±2 mA
Offset Voltage <sup>3</sup>	2 mV typ. 20 mV max.
Offset Temp. Coeff.	50 μV/°C



### Power Supply (±Vs)

Rated Voltage	±15 Vdc
Operating Range	±12 to ±18 Vdc
Maximum Safe Voltage	±18 Vdc
Quiescent Current	
4-Pole	±13 mA typ. ±20 mA max.

### Temperature

Operating	0 to +70°C
Storage	-25 to +85°C

### Pin-Out & Package Data

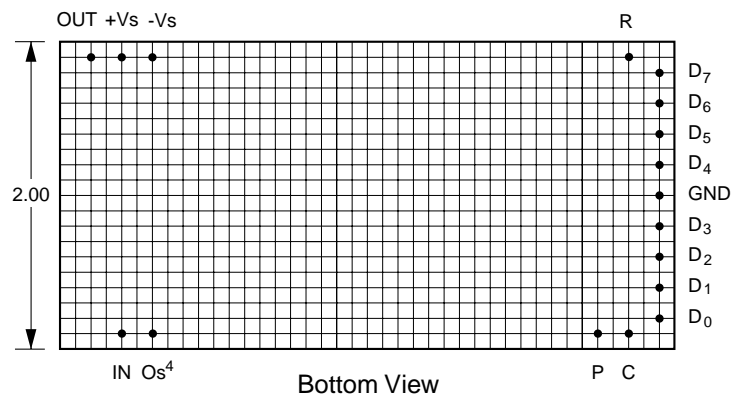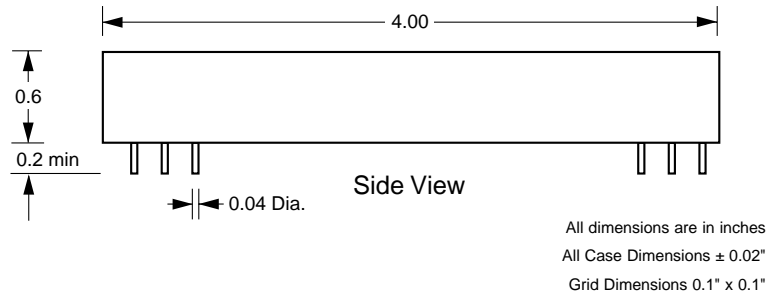


Filter Mounting Assembly-See FMA-03A


### Notes:

1. Input and output signal voltage referenced to supply common.
2. Output is short circuit protected to common.  
DO NOT CONNECT TO ±Vs.
3. Adjustable to zero.
4. Units operate with or without offset pin connected.

### DC Offset Adjustment

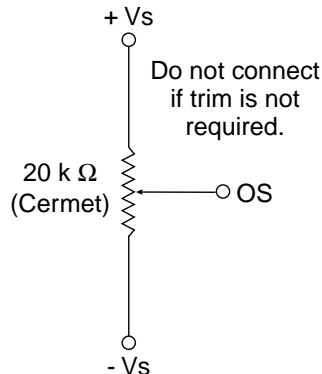

## Ordering Information

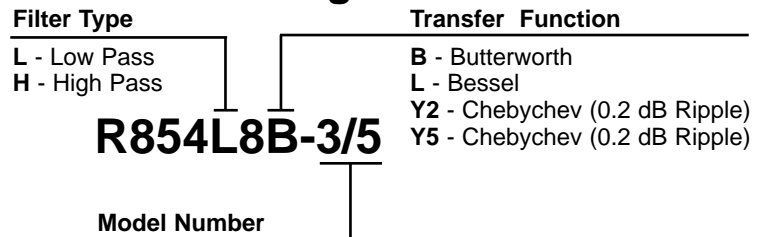

e.g., Model Number	Tuning Range (Hz)	Minimum Step(Hz)
2	1.0 to 256	1.0
3	10 to 2560	10
4	100 to 25.6k	100
5	200 to 51.2k	200
6	400 to 102.4k	400

We hope the information given here will be helpful. The information is based on data and our best knowledge, and we consider the information to be true and accurate. Please read all statements, recommendations or suggestions herein in conjunction with our conditions of sale which apply to all goods supplied by us. We assume no responsibility for the use of these statements, recommendations or suggestions, nor do we intend them as a recommendation for any use which would infringe any patent or copyright. **IN-00R854-01**




**Appendix A**


**Theoretical Transfer Characteristics**

f/fc (Hz)	Amp (dB)	Phase (deg)	Delay <sup>1</sup> (sec)
0.00	0.00	0.00	.336
0.10	-0.028	-12.1	.336
0.20	-0.111	-24.2	.336
0.30	-0.251	-36.3	.336
0.40	-0.448	-48.4	.336
0.50	-0.705	-60.6	.336
0.60	-1.02	-72.7	.336
0.70	-1.41	-84.8	.336
0.80	-1.86	-96.8	.335
0.85	-2.11	-103	.334
0.90	-2.40	-109	.333
0.95	-2.69	-115	.332
1.00	-3.01	-121	.330
1.10	-3.71	-133	.325
1.20	-4.51	-144	.318
1.30	-5.39	-156	.308
1.40	-6.37	-166	.295
1.50	-7.42	-177	.280
1.60	-8.54	-187	.263
1.70	-9.71	-195	.246
1.80	-10.9	-204	.228
1.90	-12.2	-212	.211
2.00	-13.4	-219	.194
2.25	-16.5	-235	.158
2.50	-19.5	-248	.129
2.75	-22.4	-259	.107
3.00	-25.1	-267	.089
3.25	-27.6	-275	.076
3.50	-30.0	-281	.065
4.00	-34.4	-291	.049
5.00	-41.9	-305	.031
6.00	-48.1	-315	.021
7.00	-53.4	-321	.016
8.00	-58.0	-326	.012
9.00	-62.0	-330	.009
10.0	-65.7	-333	.008


**Frequency Response**

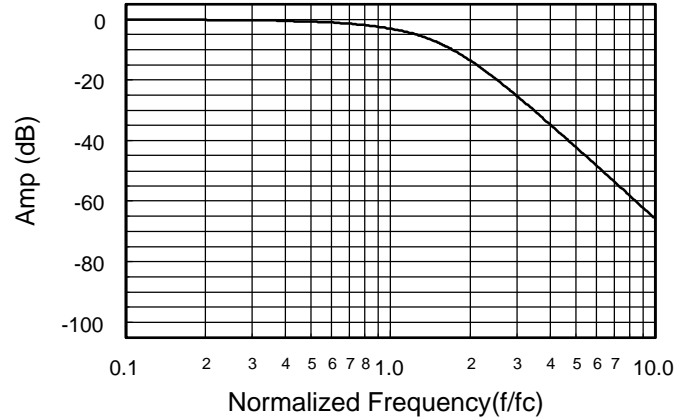

**Delay (Normalized)**

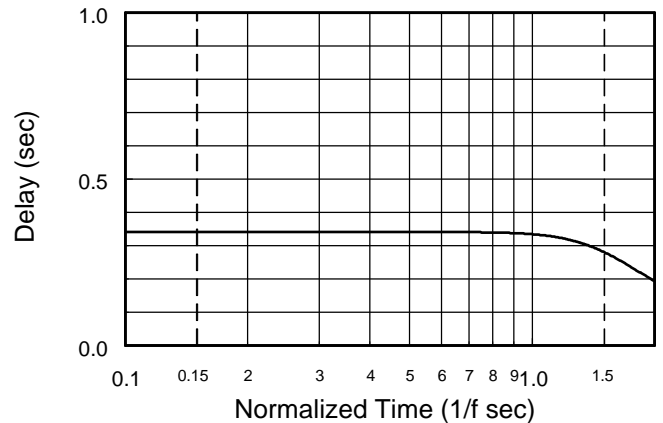

**Step Response**

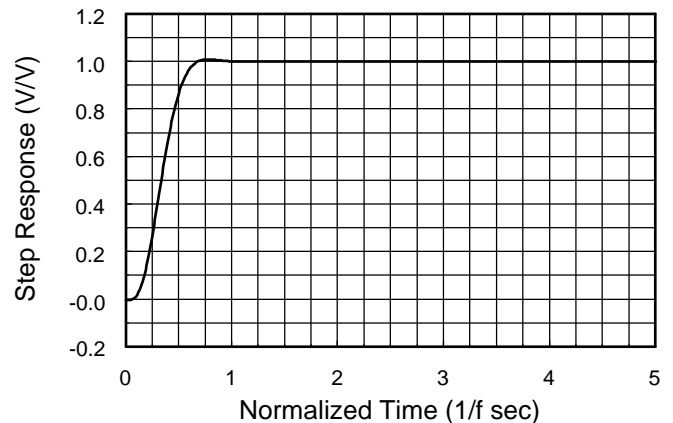

**1. Normalized Group Delay:**

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).




$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$



**Appendix A**

**Theoretical Transfer Characteristics**

f/fc (Hz)	Amp (dB)	Phase (deg)	Delay <sup>1</sup> (sec)
0.00	0.00	0.00	.416
0.10	0.00	-15.0	.418
0.20	0.00	-30.1	.423
0.30	-0.00	-45.5	.433
0.40	-0.003	-61.4	.449
0.50	-0.017	-78.0	.474
0.60	-0.072	-95.7	.511
0.70	-0.243	-115	.558
0.80	-0.674	-136	.604
0.85	-1.047	-147	.619
0.90	-1.555	-158	.622
0.95	-2.21	-169	.612
1.00	-3.01	-180	.588
1.10	-4.97	-200	.513
1.20	-7.24	-217	.427
1.30	-9.62	-231	.350
1.40	-12.0	-242	.289
1.50	-14.3	-252	.241
1.60	-16.4	-260	.204
1.70	-18.5	-266	.175
1.80	-20.5	-272	.152
1.90	-22.3	-277	.134
2.00	-24.1	-282	.119
2.25	-28.2	-291	.091
2.50	-31.8	-299	.072
2.75	-35.1	-304	.059
3.00	-38.2	-309	.049
3.25	-41.0	-313	.041
3.50	-43.5	-317	.035
4.00	-48.2	-322	.027
5.00	-55.9	-330	.017
6.00	-62.3	-335	.012
7.00	-67.6	-339	.009
8.00	-72.2	-341	.007
9.00	-76.3	-343	.005
10.0	-80.0	-345	.004

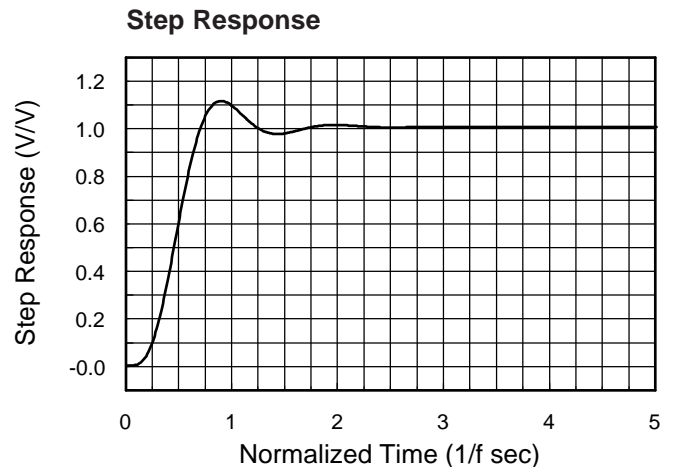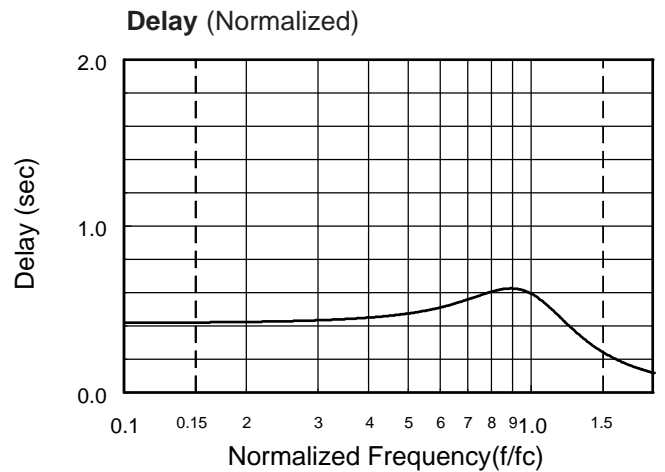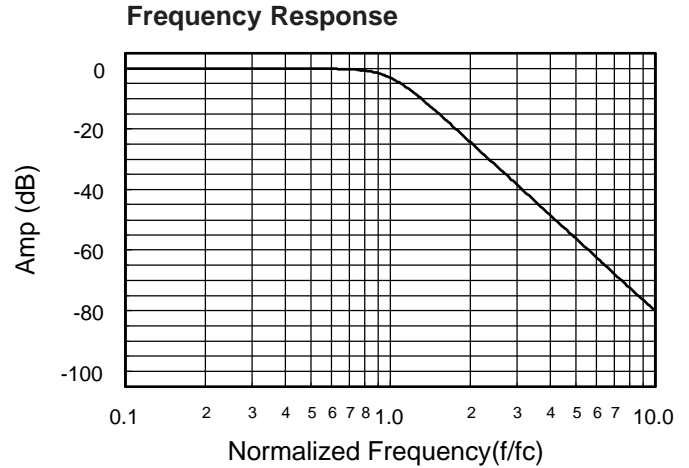

**1. Normalized Group Delay:**

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$




**Appendix A**


**Theoretical Transfer Characteristics**

f/fc (Hz)	Amp (dB)	Phase (deg)	Delay <sup>1</sup> (sec)
0.00	0.000	0.00	.478
0.10	0.039	-17.3	.487
0.20	0.129	-35.2	.509
0.30	0.195	-54.0	.533
0.40	0.174	-73.4	.547
0.50	0.074	-93.2	.553
0.60	0.000	-113	.575
0.70	0.074	-135	.654
0.80	0.199	-162	.836
0.85	0.063	-178	.947
0.90	-0.443	-196	1.02
0.95	-1.47	-214	.989
1.00	-3.01	-231	.873
1.10	-6.89	-257	.583
1.20	-10.8	-274	.385
1.30	-14.5	-286	.271
1.40	-17.7	-294	.202
1.50	-20.7	-300	.158
1.60	-23.4	-306	.128
1.70	-25.8	-310	.107
1.80	-28.1	-313	.090
1.90	-30.2	-316	.078
2.00	-32.2	-319	.068
2.25	-36.7	-324	.051
2.50	-40.6	-328	.039
2.75	-44.1	-331	.032
3.00	-47.3	-334	.026
3.25	-50.2	-336	.022
3.50	-52.8	-338	.018
4.00	-57.6	-341	.014
5.00	-65.5	-345	.009
6.00	-71.9	-347	.006
7.00	-77.3	-349	.004
8.00	-82.0	-351	.003
9.00	-86.1	-352	.003
10.0	-89.8	-352	.002


**Frequency Response**

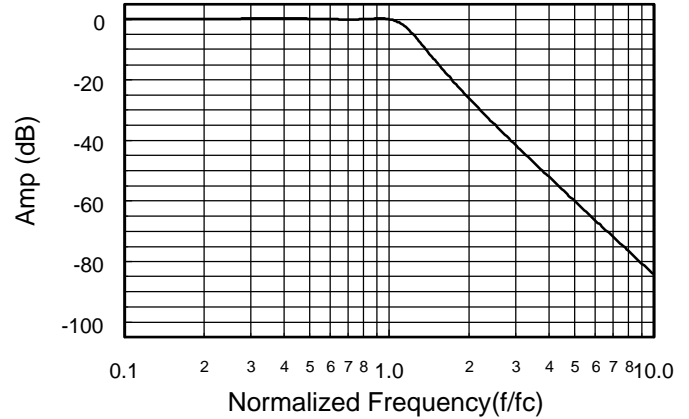

**Delay (Normalized)**

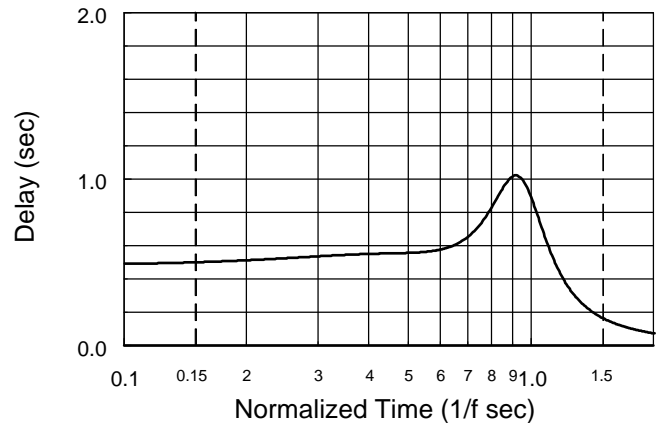

**Step Response**

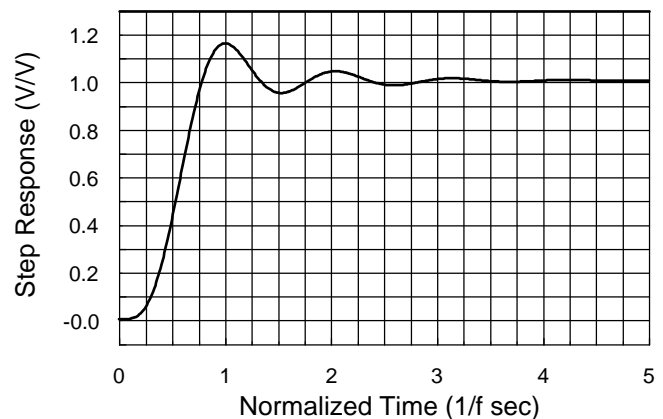

**1. Normalized Group Delay:**

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$








**Appendix A**

**Theoretical Transfer Characteristics**

f/fc (Hz)	Amp (dB)	Phase (deg)	Delay <sup>1</sup> (sec)
0.00	0.00	0.00	.476
0.10	0.087	-17.3	.492
0.20	0.295	-35.7	.533
0.30	0.474	-55.7	.577
0.40	0.463	-76.9	.596
0.50	0.248	-98.2	.583
0.60	0.025	-119	.578
0.70	0.072	-141	.647
0.80	0.432	-168	.881
0.85	0.482	-185	1.06
0.90	0.062	-205	1.18
0.95	-1.12	-226	1.13
1.00	-3.01	-245	.946
1.10	-7.61	-272	.559
1.20	-12.0	-288	.345
1.30	-15.9	-298	.235
1.40	-19.3	-305	.173
1.50	-22.4	-311	.134
1.60	-25.1	-315	.108
1.70	-27.6	-318	.089
1.80	-29.9	-321	.075
1.90	-32.1	-324	.065
2.00	-34.1	-326	.057
2.25	-38.6	-301	.042
2.50	-42.6	-334	.033
2.75	-46.1	-336	.026
3.00	-49.3	-339	.021
3.25	-52.2	-340	.018
3.50	-54.9	-342	.015
4.00	-59.7	-344	.011
5.00	-67.6	-347	.007
6.00	-74.0	-350	.005
7.00	-79.4	-351	.004
8.00	-84.1	-352	.003
9.00	-88.2	-353	.002
10.0	-91.9	-354	.002

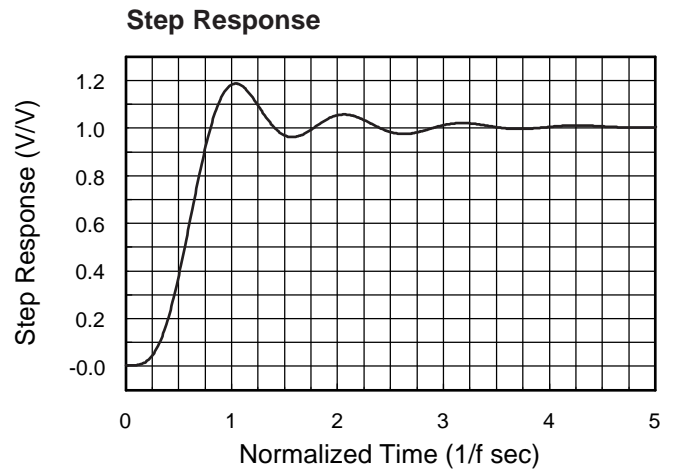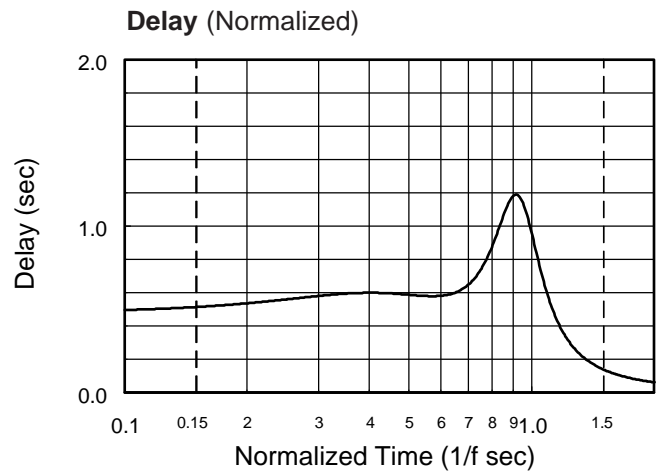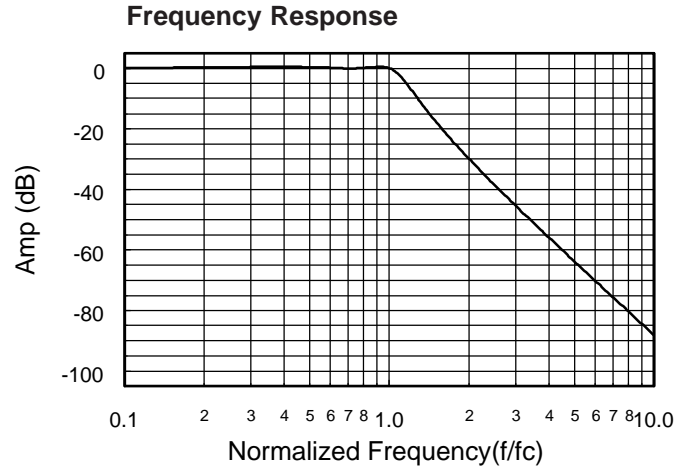

**1. Normalized Group Delay:**

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$




**Appendix A**

**Theoretical Transfer Characteristics**

<b>f/fc (Hz)</b>	<b>Amp (dB)</b>	<b>Phase (deg)</b>	<b>Delay<sup>1</sup> (sec)</b>
0.10	-80.0	345	.418
0.20	-55.9	330	.423
0.30	-41.8	314	.433
0.40	-31.8	299	.449
0.50	-24.1	282	.474
0.60	-17.8	264	.511
0.70	-12.6	245	.558
0.80	-8.43	224	.604
0.85	-6.69	213	.619
0.90	-5.22	202	.622
0.95	-3.99	191	.612
1.00	-3.01	180	.588
1.20	-0.908	143	.427
1.40	-0.285	118	.289
1.60	-0.100	100	.204
1.80	-0.039	87.6	.152
2.00	-0.017	78.0	.119
2.50	-0.003	61.4	.072
3.00	-0.001	50.7	.049
4.00	0.00	37.8	.027
5.00	0.00	30.1	.017
6.00	0.00	25.1	.012
7.00	0.00	21.4	.009
8.00	0.00	18.8	.007
9.00	0.00	16.7	.005
10.0	0.00	15.0	.004

**Frequency Response**

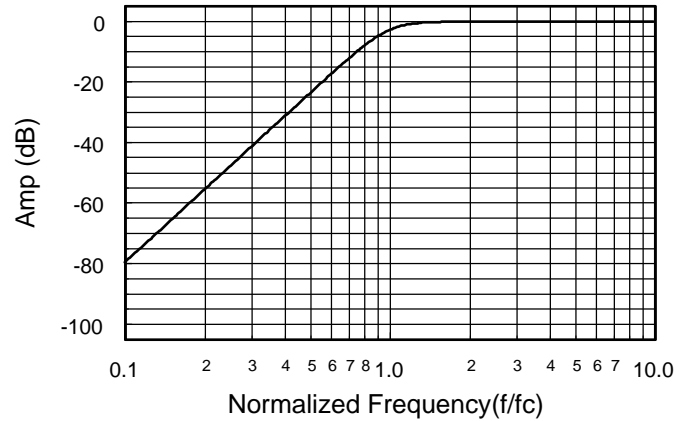

**1. Normalized Group Delay:**

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$




**Appendix A**

**Theoretical Transfer Characteristics**

<b>f/fc (Hz)</b>	<b>Amp (dB)</b>	<b>Phase (deg)</b>	<b>Delay<sup>1</sup> (sec)</b>
0.10	-89.8	352	.212
0.20	-65.1	345	.218
0.30	-51.1	337	.228
0.40	-40.6	328	.245
0.50	-32.2	319	.272
0.60	-25.0	308	.314
0.70	-18.6	296	.383
0.80	-12.7	280	.500
0.90	-7.34	259	.686
1.00	-3.01	231	.873
1.20	.140	172	.633
1.50	.031	128	.275
1.70	.003	111	.197
2.00	.074	93.2	.138
2.50	.174	73.4	.088
3.00	.200	60.4	.060
4.00	.170	44.5	.033
5.00	.129	35.2	.020
6.00	.098	29.2	.014
7.00	.076	24.9	.010
8.00	.060	21.7	.008
9.00	.048	19.3	.006
10.0	.040	17.3	.005

**Frequency Response**

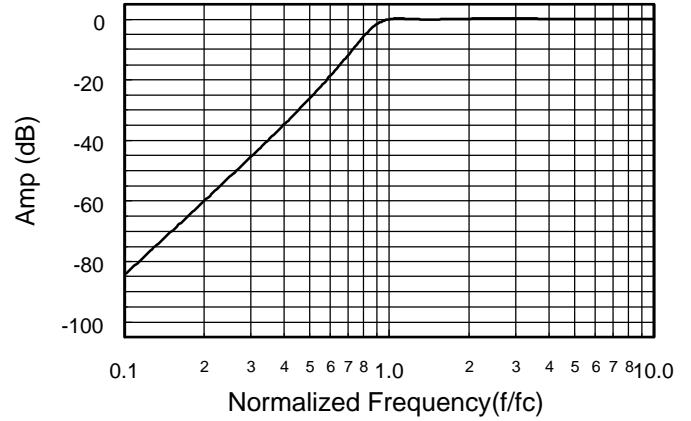

**1. Normalized Group Delay:**

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$




**Appendix A**

**Theoretical Transfer Characteristics**

<b>f/fc (Hz)</b>	<b>Amp (dB)</b>	<b>Phase (deg)</b>	<b>Delay<sup>1</sup> (sec)</b>
0.10	-91.9	354	.174
0.20	-67.6	347	.179
0.30	-53.1	341	.188
0.40	-42.6	334	.203
0.50	-34.1	326	.226
0.60	-26.8	317	.263
0.70	-20.2	307	.326
0.80	-14.0	293	.440
0.90	-8.13	274	.651
1.00	-3.01	245	.946
1.20	.500	179	.693
1.50	.014	133	.271
1.70	.043	117	.199
2.00	.249	98.2	.146
2.50	.469	76.9	.095
3.00	.498	62.7	.065
4.00	.401	45.5	.035
5.00	.296	35.7	.021
6.00	.221	29.4	.014
7.00	.169	25.0	.010
8.00	.133	21.8	.008
9.00	.107	19.3	.006
10.0	.088	17.3	.005

**Frequency Response**

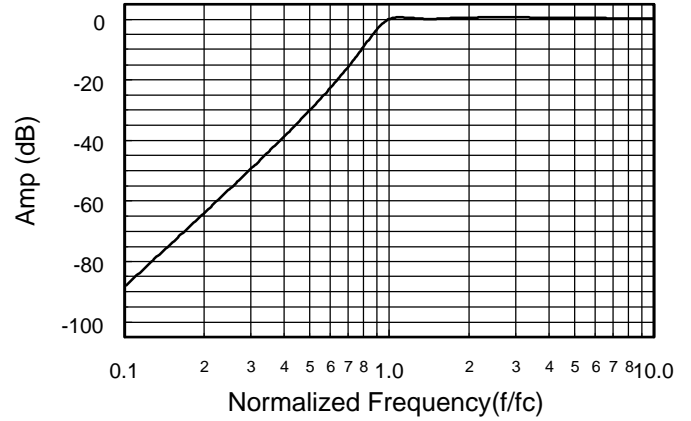

**1. Normalized Group Delay:**

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$