



EL5196C, EL5196AC

Single 400MHz Fixed Gain Amplifier with Enable

EL5196C, EL5196AC

Features

- Gain selectable (+1, -1, +2)
- 400MHz -3dB BW ($A_V = 1, 2$)
- 9mA supply current
- Fast enable/disable (EL5196AC only)
- Single and dual supply operation, from 5V to 10V or $\pm 2.5V$ to $\pm 5V$
- Available in SOT-23 packages
- Triple (EL5396C) available
- 200MHz, 4mA products available (EL5197C & EL5397C)

Applications

- Video amplifiers
- Cable drivers
- RGB amplifiers
- Test equipment
- Instrumentation
- Current to voltage converters

Ordering Information

Part No	Package	Tape & Reel	Outline #
EL5196CW-T7	5-Pin SOT-23*	7"	MDP0038
EL5196ACW-T7	6-Pin SOT-23*	7"	MDP0038
EL5196ACS	8-Pin SO	-	MDP0027
EL5196ACS-T7	8-Pin SO	7"	MDP0027
EL5196ACS-T13	8-Pin SO	13"	MDP0027

*EL5196CW & EL5196ACW symbol is .Rxxx where xxx represents date code




General Description

The EL5196C and the EL5196AC are fixed gain amplifiers with a bandwidth of 400MHz, making these amplifiers ideal for today's high speed video and monitor applications. These amplifiers feature internal gain setting resistors and can be configured in a gain of +1, -1 or +2. The same bandwidth is seen in both gain-of-1 and gain-of-2 applications.

The EL5196AC also incorporates an enable and disable function to reduce the supply current to 100µA typical per amplifier. Allowing the CE pin to float or applying a low logic level will enable the amplifier.

The EL5196C is offered in the 5-pin SOT-23 package and the EL5196AC is available in the 6-pin SOT-23 as well as the industry-standard 8-pin SO packages. Both operate over the industrial temperature range of -40°C to +85°C.

Pin Configurations



November 15, 2002

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures. 1-888-ELANTEC or 408-945-1323 | Intersil (and design) is a registered trademark of Intersil Americas Inc. Elantec® is a registered trademark of Elantec Semiconductor, Inc. Copyright © Intersil Americas Inc. 2002. All Rights Reserved

EL5196C, EL5196AC

Single 400MHz Fixed Gain Amplifier with Enable

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$)

Values beyond absolute maximum ratings can cause the device to be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

Supply Voltage between V_{S+} and V_{S-}
Maximum Continuous Output Current

11V
50mA

Operating Junction Temperature
Power Dissipation
Pin Voltages
Storage Temperature
Operating Ambient Temperature

125°C
See Curves
 $V_{S-} - 0.5\text{V}$ to $V_{S+} + 0.5\text{V}$
-65°C to +150°C
-40°C to +85°C

Important Note:

All parameters having Min/Max specifications are guaranteed. Typ values are for information purposes only. Unless otherwise noted, all tests are at the specified temperature and are pulsed tests, therefore: $T_J = T_C = T_A$.

Electrical Characteristics

$V_{S+} = +5\text{V}$, $V_{S-} = -5\text{V}$, $R_L = 150\Omega$, $T_A = 25^\circ\text{C}$ unless otherwise specified.

Parameter	Description	Conditions	Min	Typ	Max	Unit
AC Performance						
BW	-3dB Bandwidth	$A_V = +1$		400		MHz
		$A_V = -1$		400		MHz
		$A_V = +2$		400		MHz
BW1	0.1dB Bandwidth		35		MHz	
SR	Slew Rate	$V_O = -2.5\text{V}$ to $+2.5\text{V}$, $A_V = +2$	2400	2900		V/ μs
t_S	0.1% Settling Time	$V_{OUT} = -2.5\text{V}$ to $+2.5\text{V}$, $A_V = -1$		9		ns
e_N	Input Voltage Noise			3.8		nV/ $\sqrt{\text{Hz}}$
i_{N-}	IN- Input Current Noise			25		pA/ $\sqrt{\text{Hz}}$
i_{N+}	IN+ Input Current Noise			55		pA/ $\sqrt{\text{Hz}}$
dG	Differential Gain Error ^[1]	$A_V = +2$		0.035		%
dP	Differential Phase Error ^[1]	$A_V = +2$		0.04		°
DC Performance						
V_{OS}	Offset Voltage		-15	1	15	mV
$T_C V_{OS}$	Input Offset Voltage Temperature Coefficient	Measured from T_{MIN} to T_{MAX}		5		$\mu\text{V}/^\circ\text{C}$
A_E	Gain Error	$V_O = -3\text{V}$ to $+3\text{V}$	-2	1.3	2	%
R_F, R_G	Internal R_F and R_G		320	400	480	Ω
Input Characteristics						
CMIR	Common Mode Input Range		$\pm 3\text{V}$	$\pm 3.3\text{V}$		V
$+I_{IN}$	+ Input Current		-120	40	120	μA
$-I_{IN}$	- Input Current		-40	4	40	μA
R_{IN}	Input Resistance	at I_{N+}		27		k Ω
C_{IN}	Input Capacitance			0.5		pF
Output Characteristics						
V_O	Output Voltage Swing	$R_L = 150\Omega$ to GND	$\pm 3.4\text{V}$	$\pm 3.7\text{V}$		V
		$R_L = 1\text{k}\Omega$ to GND	$\pm 3.8\text{V}$	$\pm 4.0\text{V}$		V
I_{OUT}	Output Current	$R_L = 10\Omega$ to GND	95	120		mA
Supply						
I_{SON}	Supply Current - Enabled	No load, $V_{IN} = 0\text{V}$	8	9	11	mA
I_{SOFF}	Supply Current - Disabled	No load, $V_{IN} = 0\text{V}$		100	150	μA
PSRR	Power Supply Rejection Ratio	DC, $V_S = \pm 4.75\text{V}$ to $\pm 5.25\text{V}$	55	75		dB
-IPSR	- Input Current Power Supply Rejection	DC, $V_S = \pm 4.75\text{V}$ to $\pm 5.25\text{V}$	-2		2	$\mu\text{A}/\text{V}$

EL5196C, EL5196AC

Single 400MHz Fixed Gain Amplifier with Enable

EL5196C, EL5196AC

Electrical Characteristics

$V_{S+} = +5V$, $V_{S-} = -5V$, $R_L = 150\Omega$, $T_A = 25^\circ C$ unless otherwise specified.







Parameter	Description	Conditions	Min	Typ	Max	Unit
Enable (EL5196AC only)						
t _{EN}	Enable Time			40		ns
t _{DIS}	Disable Time ^[2]			600		ns
I _{HCE}	CE Pin Input High Current	$\overline{CE} = V_{S+}$		0.8	6	μA
I _{LCE}	CE Pin Input Low Current	$\overline{CE} = V_{S-}$		0	-0.1	μA
V _{IHCE}	CE Input High Voltage for Disable		$V_{S+} - 1$			V
V _{LCE}	CE Input Low Voltage for Enable				$V_{S+} - 3$	V

- Standard NTSC test, AC signal amplitude = 286mV_{p,p}, f = 3.58MHz
- Measured from the application of the \overline{CE} logic signal until the output voltage is at the 50% point between initial and final values

EL5196C, EL5196AC

Single 400MHz Fixed Gain Amplifier with Enable

Typical Performance Curves

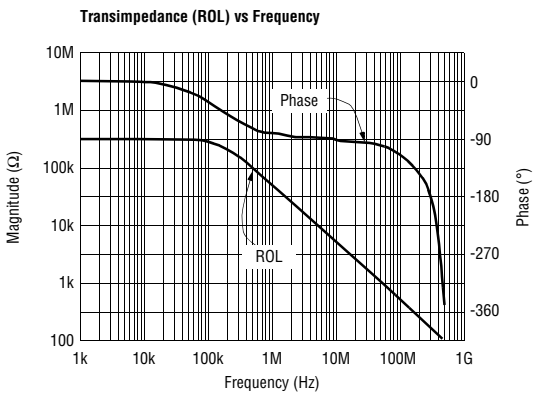
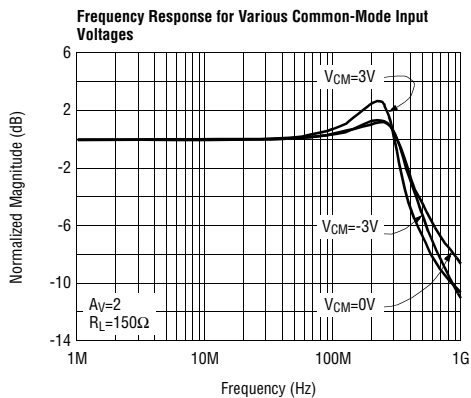
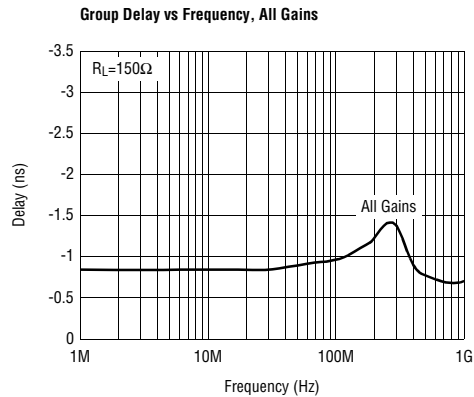
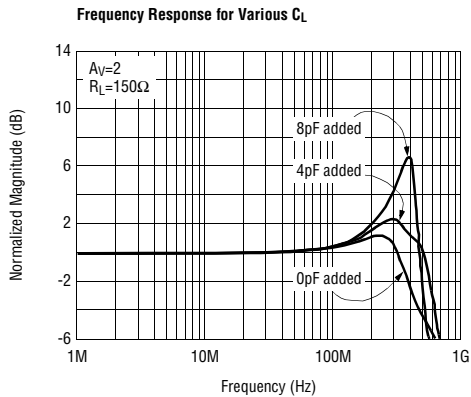
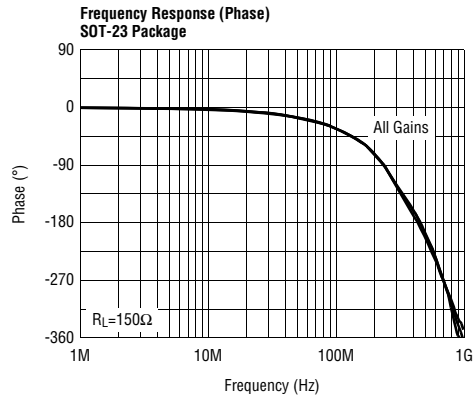
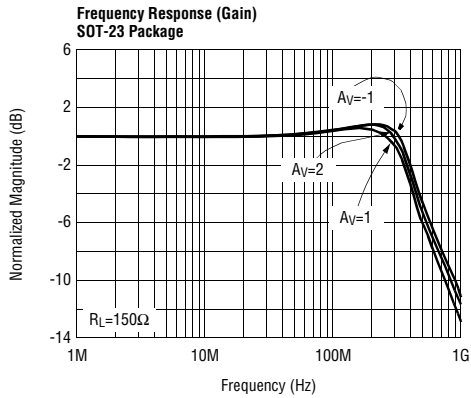


EL5196C, EL5196AC

Single 400MHz Fixed Gain Amplifier with Enable

EL5196C, EL5196AC







Typical Performance Curves

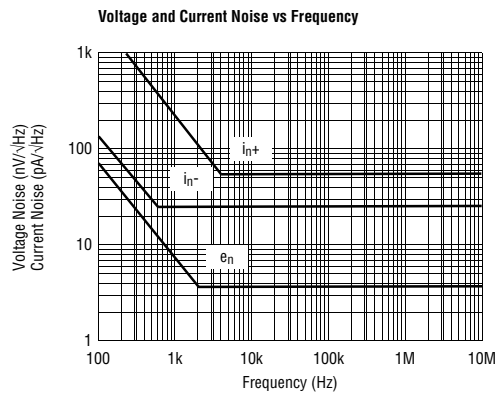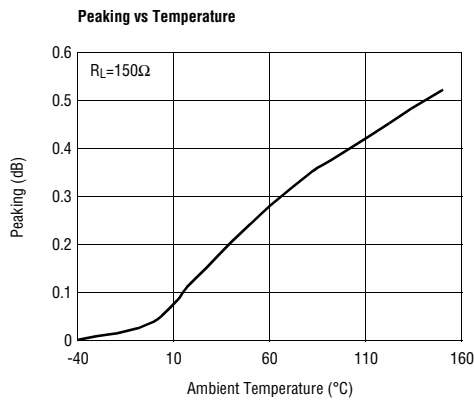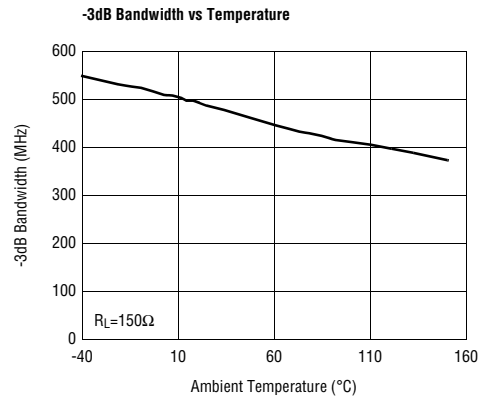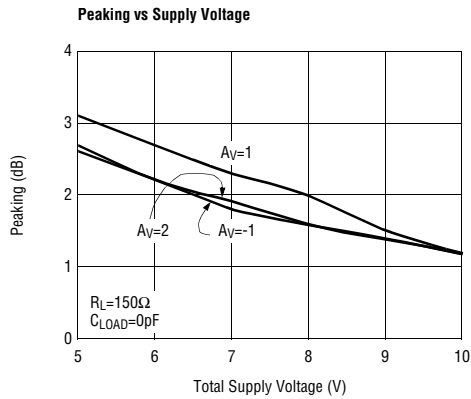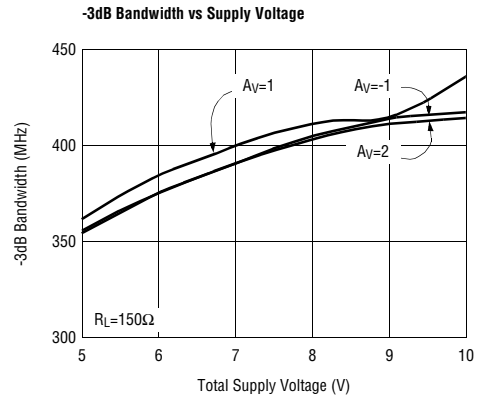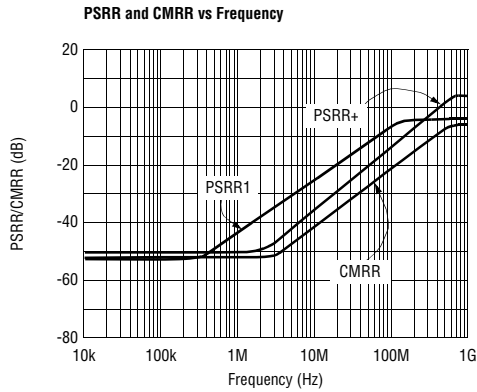

EL5196C, EL5196AC

Single 400MHz Fixed Gain Amplifier with Enable

Typical Performance Curves

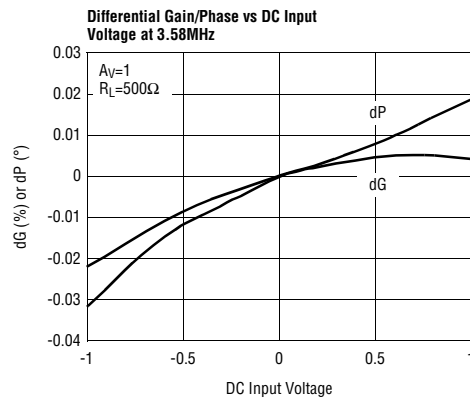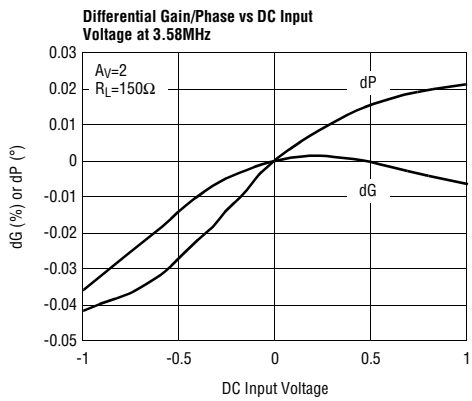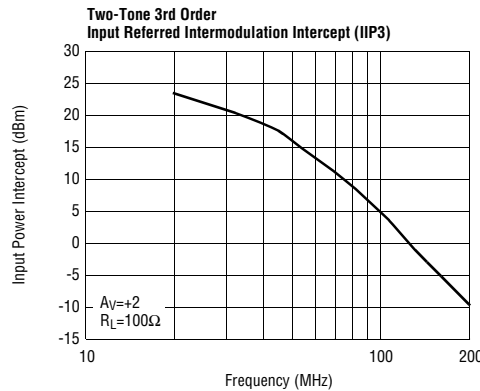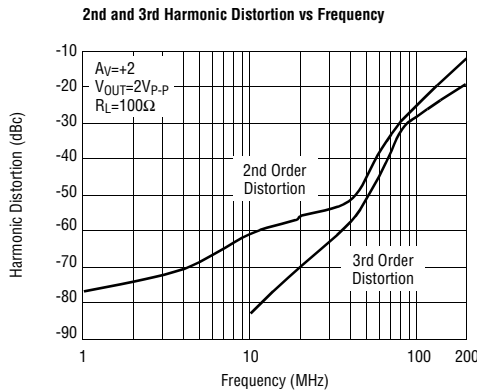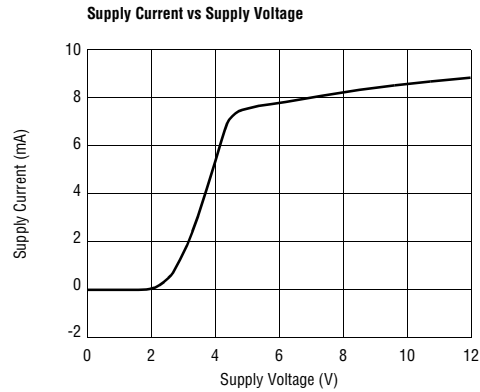
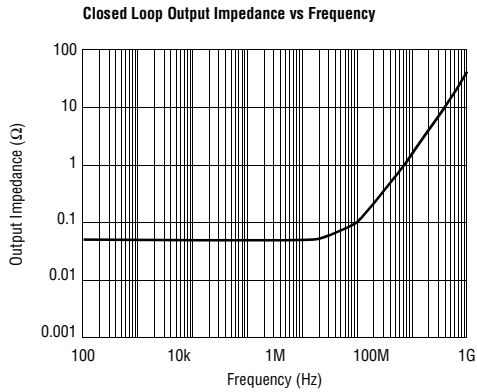


EL5196C, EL5196AC


Single 400MHz Fixed Gain Amplifier with Enable

EL5196C, EL5196AC


Typical Performance Curves

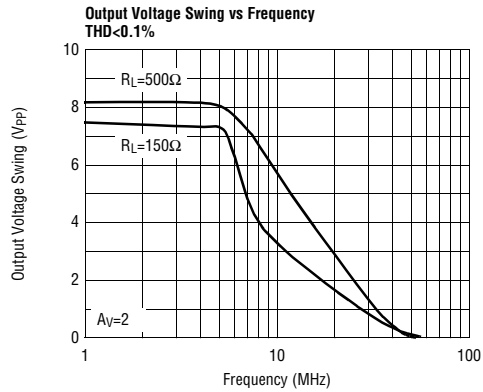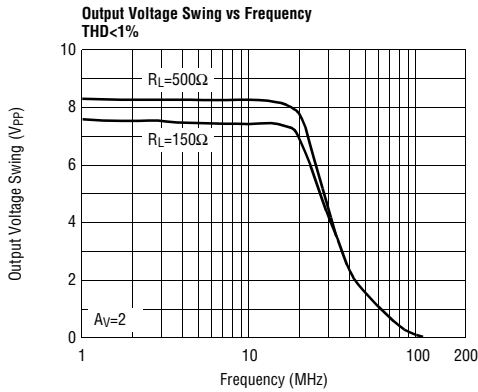


Small Signal Step Response

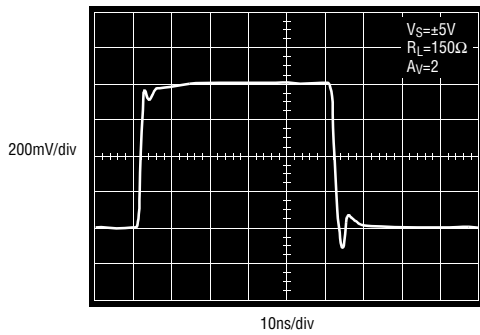


Large Signal Step Response

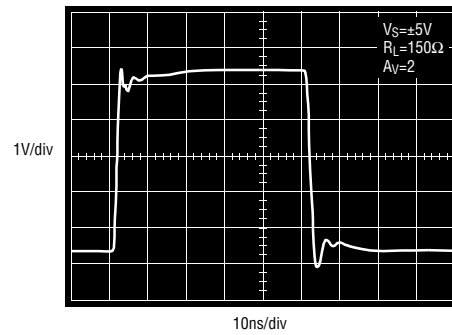

Settling Time vs Settling Accuracy

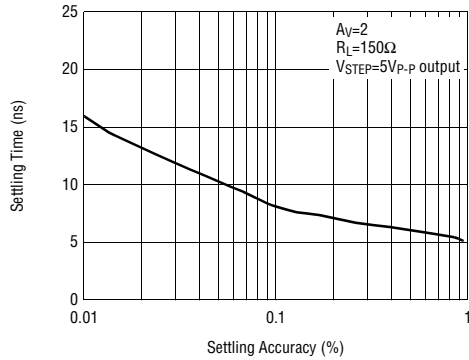







Transimpedance (RoI) vs Temperature

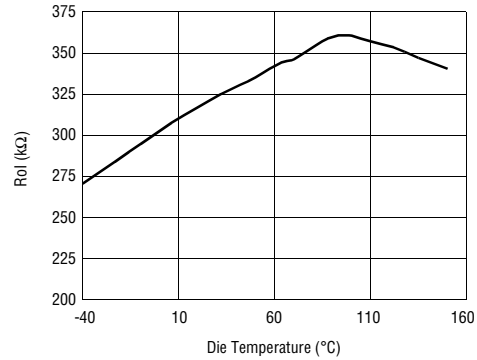

EL5196C, EL5196AC

Single 400MHz Fixed Gain Amplifier with Enable

Typical Performance Curves

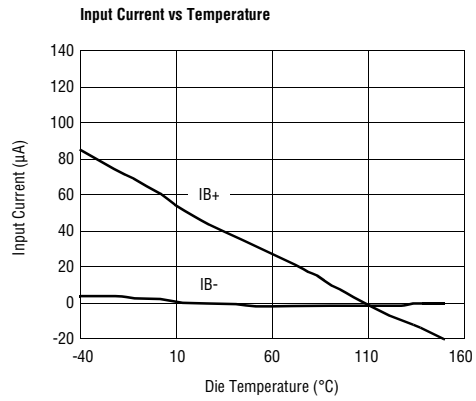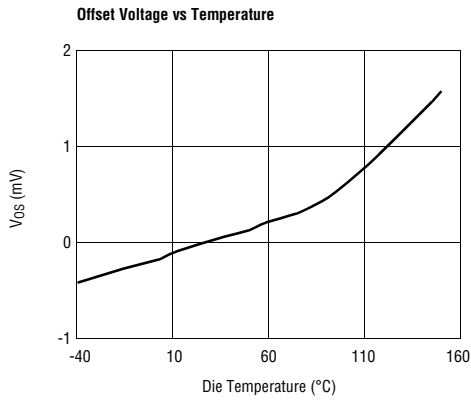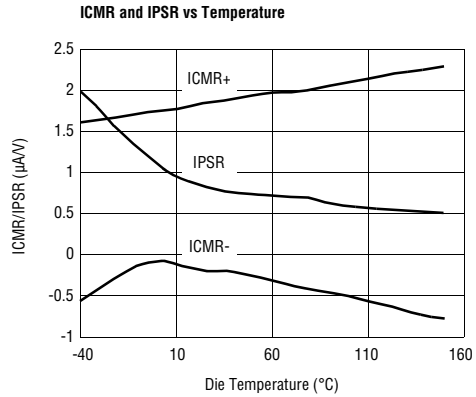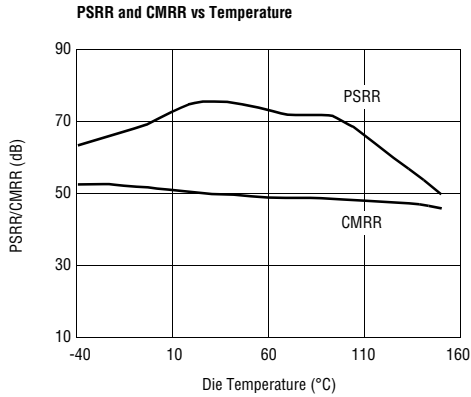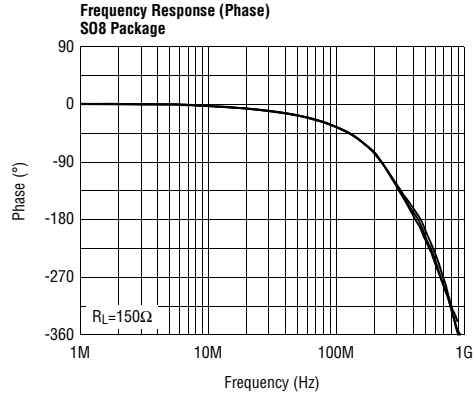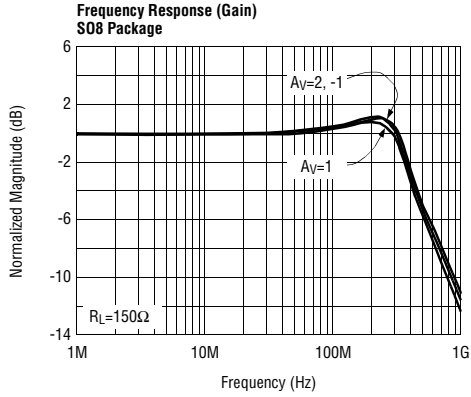


EL5196C, EL5196AC

Single 400MHz Fixed Gain Amplifier with Enable


EL5196C, EL5196AC

Typical Performance Curves


Positive Input Resistance vs Temperature

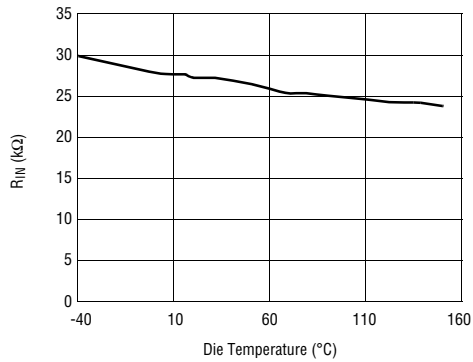


Supply Current vs Temperature

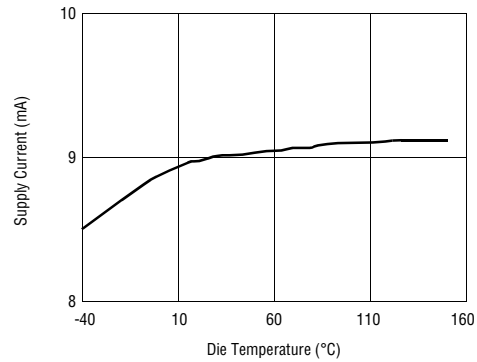


Positive Output Swing vs Temperature for Various Loads

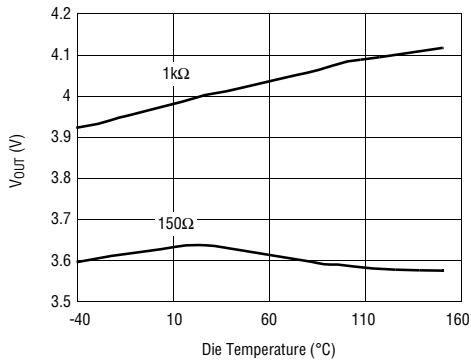


Negative Output Swing vs Temperature for Various Loads

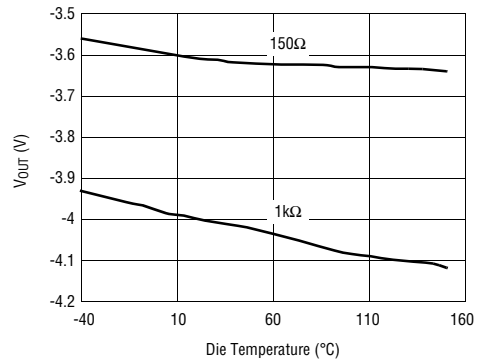

Output Current vs Temperature

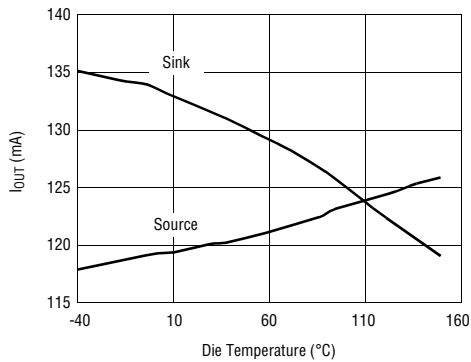

Slew Rate vs Temperature

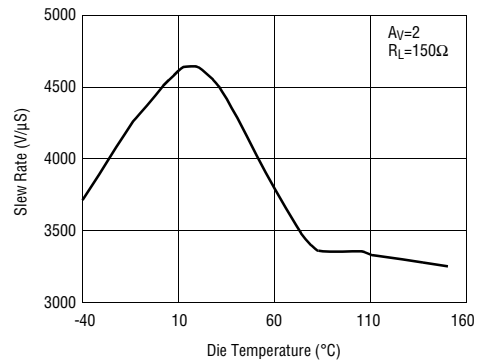


EL5196C, EL5196AC


Single 400MHz Fixed Gain Amplifier with Enable

Typical Performance Curves


Enable Response

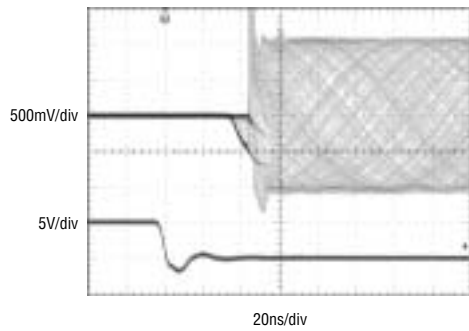


Disable Response

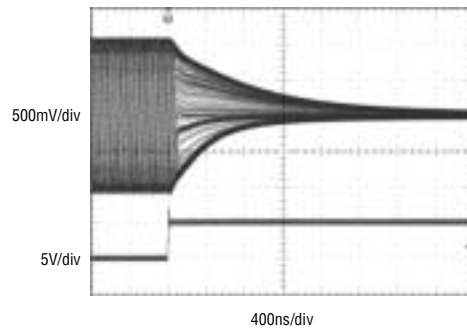

Package Power Dissipation vs Ambient Temperature
JEDEC JESD51-3 Low Effective Thermal Conductivity Test Board

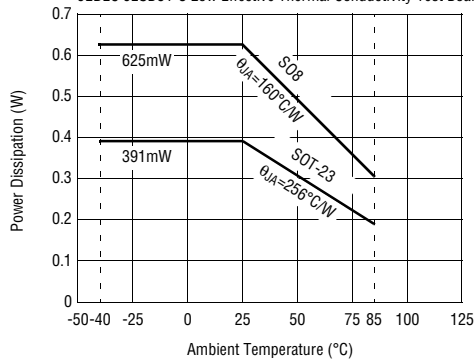

Package Power Dissipation vs Ambient Temperature
JEDEC JESD51-7 High Effective Thermal Conductivity Test Board

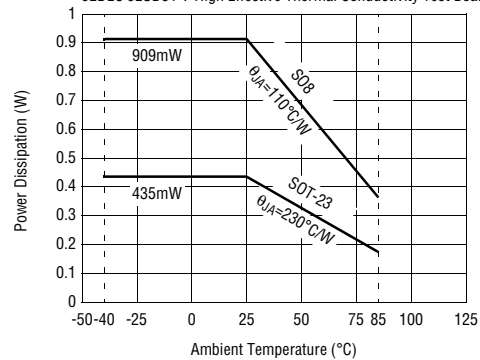

EL5196C, EL5196AC

Single 400MHz Fixed Gain Amplifier with Enable

EL5196C, EL5196AC

Pin Descriptions

EL5196AC 8-Pin SO	EL5196C 5-Pin SOT- 23	EL5196AC 6-Pin SOT- 23	Pin Name	Function	Equivalent Circuit
1, 5			NC	Not connected	
2	4	4	IN-	Inverting input	<p style="text-align: center;">Circuit 1</p>
3	3	3	IN+	Non-inverting input	(See circuit 1)
4	2	2	V _{S-}	Negative supply	
6	1	1	OUT	Output	<p style="text-align: center;">Circuit 2</p>
7	5	6	V _{S+}	Positive supply	
8		5	$\overline{\text{CE}}$	Chip enable	<p style="text-align: center;">Circuit 3</p>

EL5196C, EL5196AC

Single 400MHz Fixed Gain Amplifier with Enable

Applications Information

Product Description

The EL5196C is a fixed gain amplifier that offers a wide -3dB bandwidth of 400MHz and a low supply current of 9mA per amplifier. The EL5196C works with supply voltages ranging from a single 5V to 10V and they are also capable of swinging to within 1V of either supply on the output. This combination of high bandwidth and low power, together with aggressive pricing make the EL5196C the ideal choice for many low-power/high-bandwidth applications such as portable, handheld, or battery-powered equipment.

For varying bandwidth and higher gains, consider the EL5191C with 1GHz on a 9mA supply current or the EL5193C with 300MHz on a 4mA supply current. Versions include single, dual, and triple amp packages with 5-pin SOT-23, 16-pin QSOP, and 8-pin or 16-pin SO outlines.

Power Supply Bypassing and Printed Circuit Board Layout

As with any high frequency device, good printed circuit board layout is necessary for optimum performance. Low impedance ground plane construction is essential. Surface mount components are recommended, but if leaded components are used, lead lengths should be as short as possible. The power supply pins must be well bypassed to reduce the risk of oscillation. The combination of a 4.7 μ F tantalum capacitor in parallel with a 0.01 μ F capacitor has been shown to work well when placed at each supply pin.

Disable/Power-Down

The EL5196AC amplifier can be disabled placing its output in a high impedance state. When disabled, the amplifier supply current is reduced to < 150 μ A. The EL5196AC is disabled when its \overline{CE} pin is pulled up to within 1V of the positive supply. Similarly, the amplifier is enabled by floating or pulling its \overline{CE} pin to at least 3V below the positive supply. For ± 5 V supply, this means that an EL5196AC amplifier will be enabled when \overline{CE} is 2V or less, and disabled when \overline{CE} is above 4V. Although the logic levels are not standard TTL, this choice of logic voltages allows the EL5196AC to be enabled by

tying \overline{CE} to ground, even in 5V single supply applications. The \overline{CE} pin can be driven from CMOS outputs.

Gain Setting

The EL5196AC is built with internal feedback and gain resistors. The internal feedback resistors have equal value; as a result, the amplifier can be configured into gain of +1, -1, and +2 without any external resistors. Figure 1 shows the amplifier in gain of +2 configuration. The gain error is $\pm 2\%$ maximum. Figure 2 shows the amplifier in gain of -1 configuration. For gain of +1, IN+ and IN- should be connected together as shown in Figure 3. This configuration avoids the effects of any parasitic capacitance on the IN- pin. Since the internal feedback and gain resistors change with temperature and process, external resistor should not be used to adjust the gain settings.




Figure 1. $A_V = +2$




Figure 2. $A_V = -1$




Figure 3. $A_V = +1$

EL5196C, EL5196AC

Single 400MHz Fixed Gain Amplifier with Enable

EL5196C, EL5196AC

Supply Voltage Range and Single-Supply Operation

The EL5196C has been designed to operate with supply voltages having a span of greater than or equal to 5V and less than 11V. In practical terms, this means that the EL5196C will operate on dual supplies ranging from $\pm 2.5\text{V}$ to $\pm 5\text{V}$. With single-supply, the EL5196C will operate from 5V to 10V.

As supply voltages continue to decrease, it becomes necessary to provide input and output voltage ranges that can get as close as possible to the supply voltages. The EL5196C has an input range which extends to within 2V of either supply. So, for example, on $\pm 5\text{V}$ supplies, the EL5196C has an input range which spans $\pm 3\text{V}$. The output range of the EL5196C is also quite large, extending to within 1V of the supply rail. On a $\pm 5\text{V}$ supply, the output is therefore capable of swinging from -4V to $+4\text{V}$. Single-supply output range is larger because of the increased negative swing due to the external pull-down resistor to ground. Figure 4 shows an AC-coupled, gain of +2, +5V single supply circuit configuration.

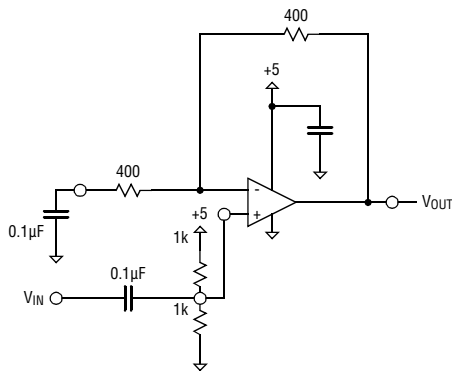


Figure 4.

Video Performance

For good video performance, an amplifier is required to maintain the same output impedance and the same frequency response as DC levels are changed at the output. This is especially difficult when driving a standard video load of 150Ω , because of the change in output current with DC level. Previously, good differential gain could only be achieved by running high idle currents through

the output transistors (to reduce variations in output impedance.) These currents were typically comparable to the entire 9mA supply current of each EL5196C amplifier. Special circuitry has been incorporated in the EL5196C to reduce the variation of output impedance with current output. This results in dG and dP specifications of 0.0035% and 0.04° , while driving 150Ω at a gain of 2.

Video performance has also been measured with a 500Ω load at a gain of +1. Under these conditions, the EL5196C has dG and dP specifications of 0.03% and 0.05° , respectively.

Output Drive Capability

In spite of its low 9mA of supply current, the EL5196C is capable of providing a minimum of $\pm 95\text{mA}$ of output current. With a minimum of $\pm 95\text{mA}$ of output drive.

Driving Cables and Capacitive Loads

When used as a cable driver, double termination is always recommended for reflection-free performance. For those applications, the back-termination series resistor will decouple the EL5196C from the cable and allow extensive capacitive drive. However, other applications may have high capacitive loads without a back-termination resistor. In these applications, a small series resistor (usually between 5Ω and 50Ω) can be placed in series with the output to eliminate most peaking.

Current Limiting

The EL5196C has no internal current-limiting circuitry. If the output is shorted, it is possible to exceed the Absolute Maximum Rating for output current or power dissipation, potentially resulting in the destruction of the device.

Power Dissipation

With the high output drive capability of the EL5196C, it is possible to exceed the 125°C Absolute Maximum junction temperature under certain very high load current conditions. Generally speaking when R_L falls below about 25Ω , it is important to calculate the maximum junction temperature (T_{JMAX}) for the application to determine if power supply voltages, load conditions, or package type need to be modified for the EL5196C to

EL5196C, EL5196AC**Single 400MHz Fixed Gain Amplifier with Enable**

remain in the safe operating area. These parameters are calculated as follows:

$$T_{JMAX} = T_{MAX} + (\theta_{JA} \times n \times PD_{MAX})$$

where:

T_{MAX} = Maximum ambient temperature

θ_{JA} = Thermal resistance of the package

n = Number of amplifiers in the package

PD_{MAX} = Maximum power dissipation of each amplifier in the package

PD_{MAX} for each amplifier can be calculated as follows:

$$PD_{MAX} = (2 \times V_S \times I_{SMAX}) + \left[(V_S - V_{OUTMAX}) \times \frac{V_{OUTMAX}}{R_L} \right]$$

where:

V_S = Supply voltage

I_{SMAX} = Maximum supply current of 1A

V_{OUTMAX} = Maximum output voltage (required)

R_L = Load resistance

EL5196C, EL5196AC
Single 400MHz Fixed Gain Amplifier with Enable



Effective May 15, 2002, Elantec, a leader in high performance analog products, is now a part of Intersil Corporation.

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems.
 Intersil Corporation's quality certifications can be viewed at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com



Sales Office Headquarters

NORTH AMERICA

Intersil Corporation
 7585 Irvine Center Drive
 Suite 100
 Irvine, CA 92618
 TEL: 949-341-7000
 FAX: 949-341-7123

Elantec
 675 Trade Zone Blvd.
 Milpitas, CA 95035
 TEL: 408-945-1323
 800: 888-ELANTEC
 FAX: 408-945-9305

EUROPE

Intersil Europe Sarl
 Avenue William Fraisse 3
 1006 Lausanne
 Switzerland
 TEL: +41-21-6140560
 FAX: +41-21-6140579

ASIA

Intersil Corporation
 Unit 1804 18/F Guangdong Water Bldg.
 83 Austin Road
 TST, Kowloon Hong Kong
 TEL: +852-2723-6339
 FAX: +852-2730-1433