



1.0 Hz to 100 kHz  
Fixed Frequency

32 Pin DIP  
6-Pole Filters

**Description**

The D66 and DP66 Series of small 6-pole fixed-frequency, precision active filters provide high performance linear active filtering in a compact 32-pin DIP package, with a broad range of corner frequencies and a choice of transfer functions. Individual D66 filters can serve in low-pass or high-pass applications (DP66, low-pass only) or be combined to create custom band-pass or band-reject filters. These fully self-contained units require no external components or adjustments. Each model comes factory tuned to a user-specified corner frequency between 1 Hz and 100 kHz (DP66, 1 Hz to 5 kHz) and operate with low total harmonic distortion over a wide dynamic input voltage range from non-critical +/-5V to +/-18V power supplies.

**Features/Benefits:**

- Low harmonic distortion and wide signal-to-noise ratio to 16 bit resolution.
- Compact 1.8"L x 0.8"W x 0.3"H minimizes board space requirements.
- Plug-in ready-to-use, reducing engineering design and manufacturing cycle time.
- Factory tuned, no external clocks or adjustments needed
- Broad range of transfer characteristics and corner frequencies to meet a wide range of applications.

**Applications**

- Anti-alias filtering
- Data acquisition systems
- Communication systems and electronics
- Medical electronics equipment and research
- Aerospace, navigation and sonar applications
- Sound and vibration testing
- Acoustic and vibration analysis and control
- Noise elimination
- Signal reconstruction



**Available Low-Pass Models:**

	<b>Page</b>
<b>D66L6B</b> 6-pole Butterworth .....	2
<b>DP66L6B</b> 6-pole Butterworth (Low Power) .....	2
<b>D66L6L</b> 6-pole Bessel .....	2
<b>DP66L6L</b> 6-pole Bessel (Low Power) .....	2

**Available High-Pass Models:**

<b>D66H8B</b> 6-pole Butterworth .....	2
--	---

**General Specifications:** .....

Pin-out/package data & ordering information .....	3
---	---

Model	D66L6B & DP66L6B	D66L6L & DP66L6L	Model	D66H6B
<b>Product Specifications</b>	<b>Low-Pass</b>	<b>Low-Pass</b>		<b>High-pass</b>
<b>Transfer Function</b>	6-Pole, Butterworth	6-Pole, Bessel	<b>Transfer Function</b>	6-Pole, Butterworth
<b>Size</b>	1.8" x 0.8" x 0.3"	1.8" x 0.8" x 0.3"	<b>Size</b>	1.8" x 0.8" x 0.3"
<b>Range f<sub>c</sub></b> <b>D66</b> <b>DP66</b>	1 Hz to 100 kHz 1 Hz to 5 kHz	1 Hz to 100 kHz 1 Hz to 5 kHz	<b>Range f<sub>c</sub></b> <b>D66</b> <b>DP66</b>	1 Hz to 100 kHz Not Available
<b>Theoretical Transfer Characteristics</b>	Appendix A Page 8	Appendix A Page 3	<b>Theoretical Transfer Characteristics</b>	Appendix A Page 28
<b>Passband Ripple</b> (theoretical)	0.0 dB	0.0 dB	<b>Passband Ripple</b> (theoretical)	0.0 dB
<b>DC Voltage Gain</b> (non-inverting)	0 ± 0.1 dB max. 0 ± 0.05 dB typ.	0 ± 0.1 dB max. 0 ± 0.05 dB typ.	<b>DC Voltage Gain</b> (non-inverting)	0 ± 0.1 dB to 100 kHz 0 ± 0.05 dB to 120 kHz
<b>Stopband Attenuation Rate</b>	36 dB/octave	36 dB/octave	<b>Stopband Attenuation Rate</b>	36 dB min.
<b>Power Bandwidth</b>			<b>Power Bandwidth</b>	(-6dB) 1 MHz
<b>Power Bandwidth</b>			<b>Power Bandwidth</b>	120 kHz
<b>Cutoff Frequency Stability</b> <b>Amplitude</b> <b>Phase</b>	f <sub>c</sub> ± 1% max. ± 0.01% /°C -3dB -270°	f <sub>c</sub> ± 1% max. ± 0.01% /°C -3dB -155°	<b>Cutoff Frequency Stability</b> <b>Amplitude</b> <b>Phase</b>	f <sub>c</sub> ± 1% max. ± 0.01% /°C -3dB -270°
<b>Filter Attenuation</b> (theoretical)	0.29 dB      0.80 f <sub>c</sub> 3.01 dB      1.00 f <sub>c</sub> 60.0 dB      3.16 f <sub>c</sub> 80.0 dB      4.64 f <sub>c</sub>	1.89 dB      0.80 f <sub>c</sub> 3.01 dB      1.00 f <sub>c</sub> 60.0 dB      5.41 f <sub>c</sub> 80.0 dB      7.99 f <sub>c</sub>	<b>Filter Attenuation</b> (theoretical)	80.0 dB      .21 f <sub>c</sub> 60.0 dB      .32 f <sub>c</sub> 3.01 dB      1.00 f <sub>c</sub> 0.00 dB      2.5 f <sub>c</sub>
<b>Phase Match<sup>1</sup></b>	0 - 0.8 f <sub>c</sub> ± 2° max. ± 1° typ. 0.8 f <sub>c</sub> - 1.0 f <sub>c</sub> ± 3° max. ± 1.5° typ.	0 - f <sub>c</sub> ± 2° max. ± 1° typ.	<b>Phase Match<sup>1</sup></b>	f <sub>c</sub> - 100 kHz      ± 3° max. ± 1.5° typ.
<b>Amplitude Accuracy</b> (theoretical)	0 - 0.8 f <sub>c</sub> ± 0.2 dB max. ± 0.1 dB typ. 0.8 f <sub>c</sub> - 1.0 f <sub>c</sub> ± 0.3° dB max. ± 0.15° dB typ.	0 - f <sub>c</sub> ± 0.2 dB max. ± 0.1 dB typ.	<b>Amplitude Accuracy</b> (theoretical)	1.0 - 1.25 f <sub>c</sub> ± 0.3 dB max. ± 0.15 dB typ. 1.25f <sub>c</sub> -100kHz      ± 0.2 dB max. ± 0.1 dB typ.
<b>Total Harmonic Distortion @ 1 kHz</b> <b>D66</b> <b>DP66</b>	<-100 dB typ. <-80 dB typ.	<-100 dB typ. <-80 dB typ.	<b>Total Harmonic Distortion @ 1 kHz</b> <b>D66</b> <b>DP66</b>	<-88 dB typ.
<b>Wide Band Noise</b> (5 Hz - 2 MHz)	200 μVrms typ.	200 μVrms typ.	<b>Wide Band Noise</b> (5 Hz - 2 MHz)	400 μVrms typ.
<b>Narrow Band Noise</b> (20 Hz - 100 kHz)	50 μVrms typ.	50 μVrms typ.	<b>Narrow Band Noise</b> (20 Hz - 100 kHz)	100 μVrms typ.
<b>Filter Mounting Assembly</b>	FMA-01A	FMA-01A	<b>Filter Mounting Assembly</b>	FMA-01A

1. Unit to unit match for the same transfer function, set to the same frequency and operating configuration, and from the same manufacturing lot.

## Specification

(25°C and  $V_s \pm 15$  Vdc)

## Pin-Out and Package Data Ordering Information

### Analog Input Characteristics<sup>1</sup>

Impedance	10 k $\Omega$ min.
Voltage Range	$\pm 10$ V <sub>peak</sub>
Max. Safe Voltage	$\pm V_s$

### Analog Output Characteristics

Impedance(Closed Loop)	1 $\Omega$ typ. 10 $\Omega$ max.
Linear Operating Range	$\pm 10$ V
Maximum Current <sup>2</sup>	$\pm 2$ mA
Offset Voltage <sup>3</sup>	2 mV typ. 20 mV max.
Offset Temp. Coeff.	50 $\mu$ V / °C

### Power Supply ( $\pm V$ )

Rated Voltage	$\pm 15$ Vdc
Operating Range	$\pm 5$ to $\pm 18$ Vdc
Maximum Safe Voltage	$\pm 18$ Vdc
Quiescent Current D66	



$\pm 18.75$  mA typ.  
 $\pm 30$  mA max.

Quiescent Current DP66



$\pm 5.25$  mA typ.  
 $\pm 7.5$  mA max.

### Temperature

Operating	0 to + 70 °C
Storage	- 25 to + 85 °C

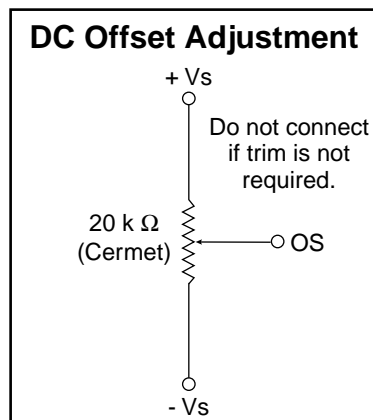

All dimensions are in inches  
All case dimensions  $\pm 0.01$ "

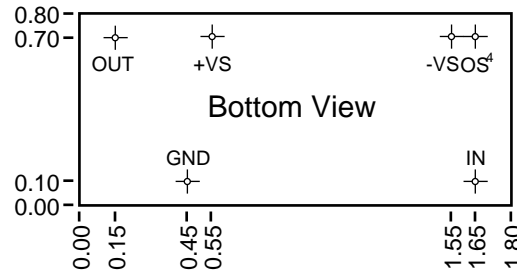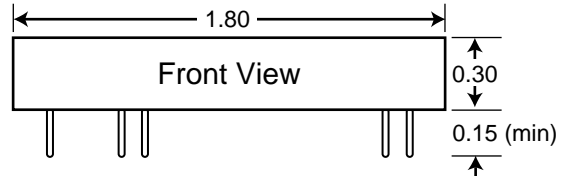

Filter Mounting Assembly-See FMA-01A

## Ordering Information

### Filter Type

L - Low Pass  
H - High Pass

### Transfer Function

B - Butterworth  
L - Bessel

## D66L6B-849 Hz

### Power Level

D - Standard Power

DP - Low Power

Notes:

1. Input and output signal voltage referenced to supply common.
2. Output is short circuit protected to common. DO NOT CONNECT TO  $\pm V_s$ .
3. Adjustable to zero.
4. Units operate with or with out offset pin connected.
5. How to Specify Corner Frequency:

Corner frequencies are specified by attaching a three digit frequency designator to the basic model number. Corner frequencies can range from 1.00 Hz to 100 kHz.

### - 3 dB Corner Frequency<sup>5</sup>

e.g., 849 Hz

2.50 kHz

33.3 kHz



**Appendix A**




**Theoretical Transfer Characteristics**

f/fc (Hz)	Amp (dB)	Phase (deg)	Delay <sup>1</sup> (sec)
0.00	0.00	0.00	.430
0.10	-0.029	-15.5	.430
0.20	-0.116	-31.0	.430
0.30	-0.261	-46.5	.430
0.40	-0.465	-62.0	.430
0.50	-0.728	-77.4	.430
0.60	-1.05	-92.9	.430
0.70	-1.44	-108	.430
0.80	-1.89	-124	.430
0.85	-2.15	-132	.430
0.90	-2.42	-139	.430
0.95	-2.70	-147	.430
1.00	-3.01	-155	.430
1.10	-3.68	-170	.429
1.20	-4.44	-186	.428
1.30	-5.29	-201	.426
1.40	-6.23	-216	.422
1.50	-7.29	-232	.416
1.60	-8.46	-246	.401
1.70	-9.74	-261	.393
1.80	-11.1	-275	.376
1.90	-12.6	-287	.357
2.00	-14.2	-300	.335
2.25	-18.3	-328	.279
2.50	-22.6	-351	.228
2.75	-26.7	-369	.187
3.00	-30.7	-385	.156
3.25	-34.5	-398	.131
3.50	-38.1	-408	.111
4.00	-44.7	-426	.083
5.00	-55.9	-449	.052
6.00	-65.2	-465	.036
7.00	-73.2	-476	.026
8.00	-80.1	-484	.020
9.00	-86.2	-490	.015
10.0	-91.6	-495	.013

**1. Normalized Group Delay:**

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$

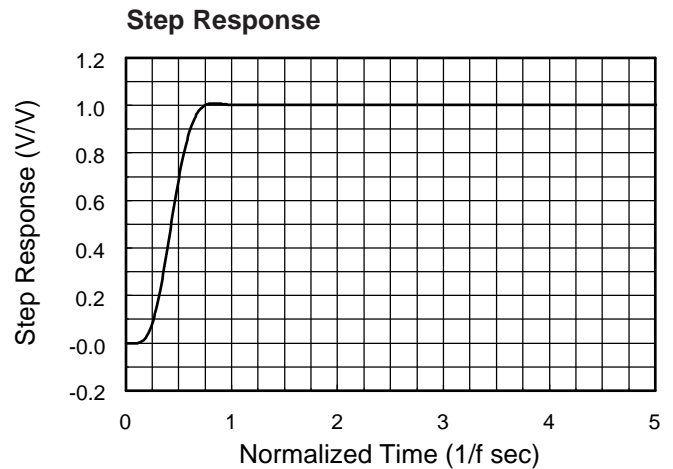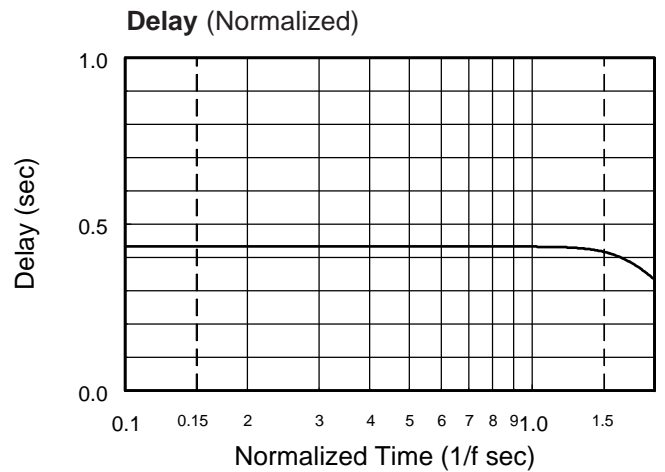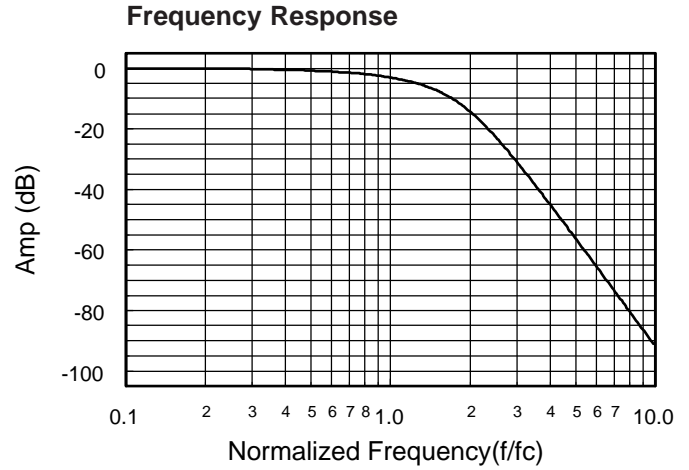



**Appendix A**

**Theoretical Transfer Characteristics**


f/fc (Hz)	Amp (dB)	Phase (deg)	Delay <sup>1</sup> (sec)
0.00	0.00	0.00	.615
0.10	0.00	-22.2	.617
0.20	0.00	-44.5	.624
0.30	0.00	-67.2	.637
0.40	0.00	-90.4	.656
0.50	-0.001	-115	.685
0.60	-0.009	-140	.731
0.70	-0.060	-167	.803
0.80	-0.289	-198	.911
0.85	-0.578	-215	.970
0.90	-1.080	-233	1.02
0.95	-1.88	-252	1.03
1.00	-3.01	-270	1.00
1.10	-6.17	-304	.845
1.20	-9.96	-331	.660
1.30	-13.9	-352	.518
1.40	-17.6	-368	.417
1.50	-21.2	-382	.345
1.60	-24.5	-393	.291
1.70	-27.7	-403	.251
1.80	-30.6	-412	.219
1.90	-33.5	-419	.193
2.00	-36.1	-425	.171
2.25	-42.3	-439	.132
2.50	-47.8	-450	.105
2.75	-52.7	-458	.086
3.00	-57.3	-465	.071
3.25	-61.4	-471	.060
3.50	-65.3	-476	.052
4.00	-72.2	-484	.039
5.00	-83.9	-496	.025
6.00	-93.4	-503	.017
7.00	-101	-508	.012
8.00	-108	-512	.0097
9.00	-115	-515	.0076
10.0	-120	-518	.0062

**1. Normalized Group Delay:**


The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$


**Frequency Response**

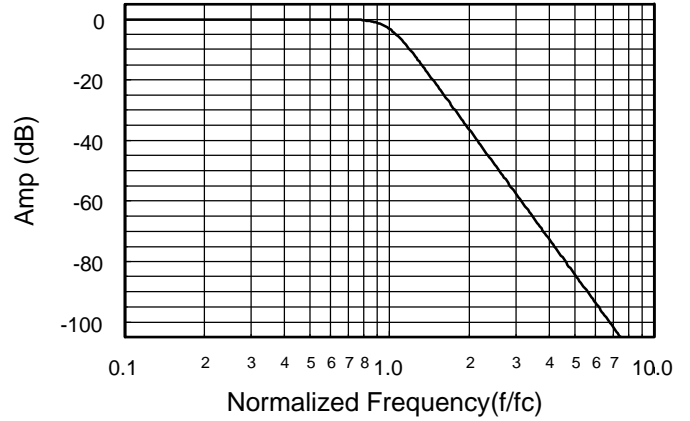

**Delay (Normalized)**

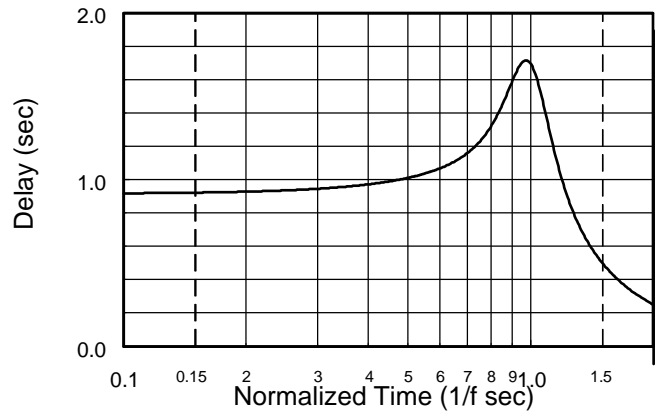

**Step Response**

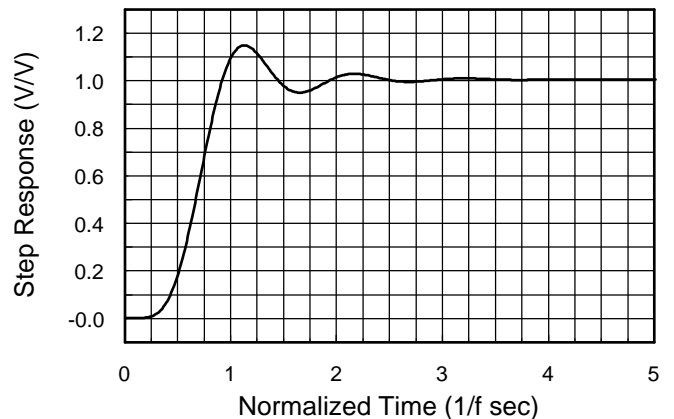




**Appendix A**

**Theoretical Transfer Characteristics**

<b>f/fc (Hz)</b>	<b>Amp (dB)</b>	<b>Phase (deg)</b>	<b>Delay<sup>1</sup> (sec)</b>
0.10	-120	518	0.617
0.20	-83.9	496	0.624
0.30	-62.7	473	0.637
0.40	-47.8	450	0.656
0.50	-36.1	425	0.685
0.60	-26.6	400	0.731
0.70	-18.6	373	0.803
0.80	-11.9	342	0.911
0.85	-9.05	325	0.970
0.90	-6.57	307	1.017
0.95	-4.55	288	1.033
1.00	-3.01	270	1.005
1.20	-0.46	209	0.660
1.40	-0.08	172	0.417
1.60	-0.02	147	0.291
1.80	-0.00	128	0.219
2.00	-0.00	115	0.171
2.50	-0.00	90.4	0.105
3.00	-0.00	74.8	0.071
4.00	0.00	55.8	0.039
5.00	0.00	44.5	0.025
6.00	0.00	37.0	0.017
7.00	0.00	31.7	0.013
8.00	0.00	27.7	0.010
9.00	0.00	24.6	0.008
10.0	0.00	22.2	0.006

**Frequency Response**

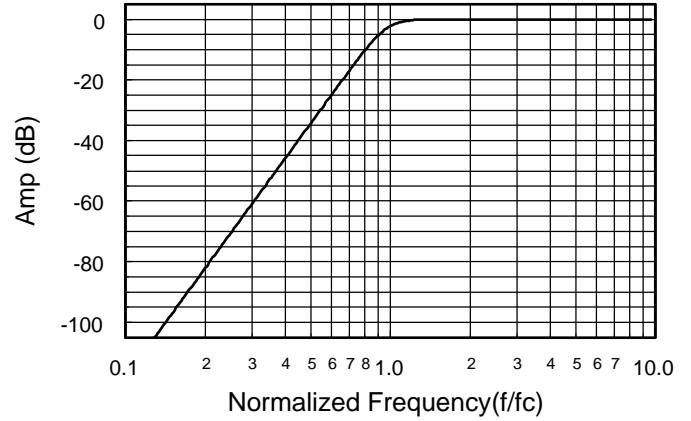

**1. Normalized Group Delay:**

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$