

SPECIFICATION SHEET

PART NO

48065760

REV

A

SPECIFICATIONS:

Inductance: 10 kHz, 0.1VRMS 1-2+3-4: 850 uH ± 10%


DCR: (1-3): 1.05 ohms max
 (2-4): 1.05 ohms max
 (8-6): 0.85 ohms max
 (7-5): 1.05 ohms max

Hipot: 1875VAC between Line Side (Pri) and IC side (Sec)

Leakage Inductance: 100 kHz, .1VRMS
 1-(2+3)-4, 5+6+7+8 tied: 5 uH max.

Turns Ratio (Pri:Sec): 1:1 ± 2%

Meets the specifications for supplementary insulation per IEC-950 with a working voltage of 250V.

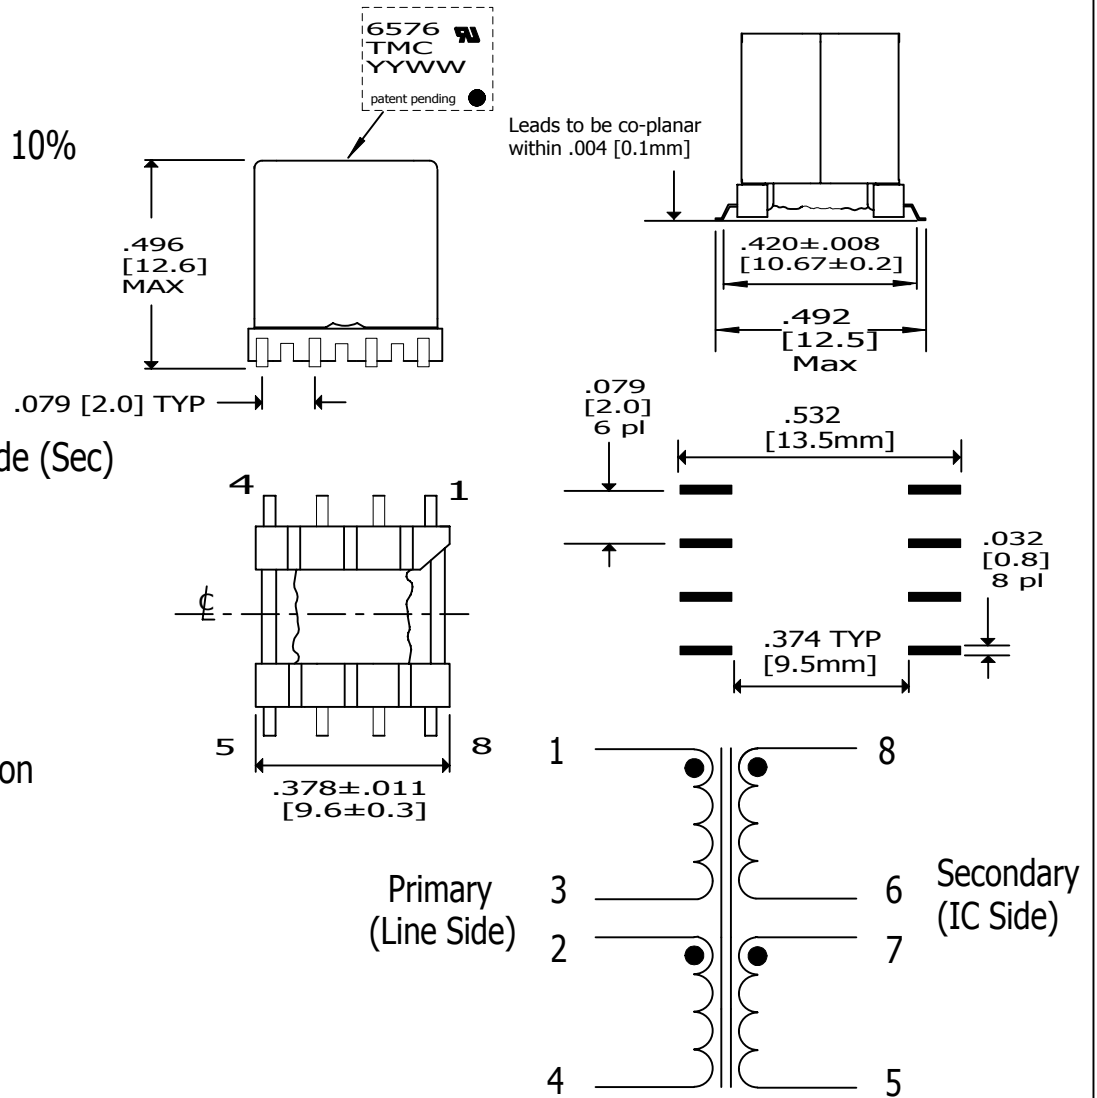

Patent Pending

TRACY MINNTRONIX

1045 CRAIG AVENUE, TRACY, MN 56175

TITLE ADSL over POTS Transformer for CO

For use with Centillium ADSL IC

SHEET 1 OF 1

TEMP CLASS 130 °C

TOLERANCES UNLESS OTHERWISE NOTED

| 2 PLACES | 3 PLACES | ANGLE |
|----------|----------|-------|
| ±.03 | ±.010 | ± 1° |