

# SPECIFICATION SHEET

PART NO

48060480

REV A

## SPECIFICATIONS:





IND: 10KHz, .1V (2-11)  
5.75mH  $\pm$  10%

LEAKAGE IND: 100KHz (2-11) SHORT (8-5-7-6)  
55 $\mu$ H MAX


IWC: 100KHz (2-11) TO (8-5-7-6)  
187pF MAX

DCR: (NOM) (2-11) 1.65  $\Omega$   
(8-5) 1.65  $\Omega$   
(7-6) 1.65  $\Omega$

HIPOT: 2000VAC (2-11) TO (8-5-7-6)

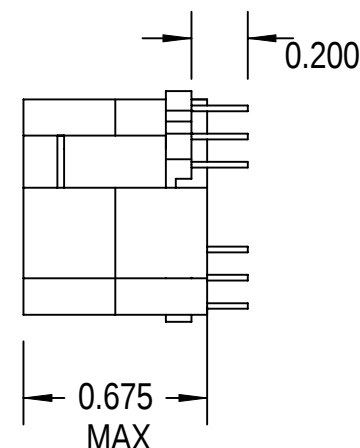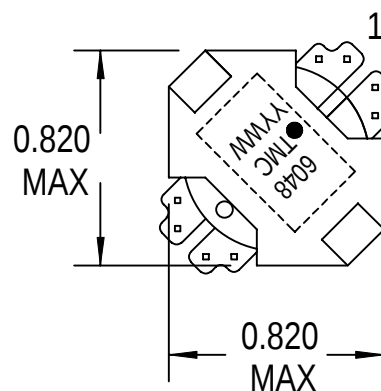

0.100

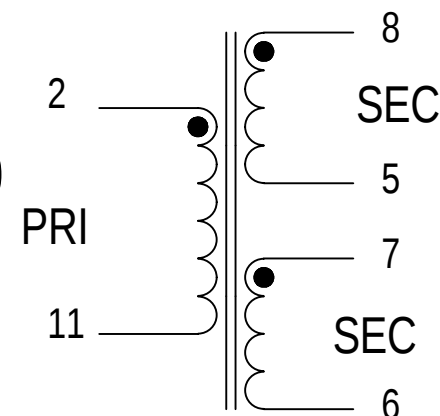

All statements and technical information contained herein are believed to be accurate, but the accuracy and completeness thereof is not guaranteed. All trademarks and trade names are the property of their respective holders. © 1999 Tracy Minntronix Corporation

TRACY MINNTRONIX

1045 CRAIG AVE.  
TRACY, MN 56175

TITLE

ISDN "U" INTERFACE

SHEET

1 OF 1

TOLERANCES  
UNLESS OTHERWISE NOTED

CATALOG

TEMP CLASS

130 °C

| 2 PLACES  | 3 PLACES   | ANGLE    |
|-----------|------------|----------|
| $\pm$ .03 | $\pm$ .010 | $\pm$ 1° |