


SMD 28 Pin 5 Tap TTL Compatible Active Delay Lines

Delays are ±5% or ±2 nSt Tap		J-Lead P/N	Gull-Wing P/N	Delays are ±5% or ±2 nSt Total		J-Lead P/N	Gull-Wing P/N
5, 10, 15, 20	25	EP9100	EP9115	20, 40, 60, 80	100	EP9108	EP9123
6, 12, 18, 24	30	EP9101	EP9116	25, 50, 75, 100	125	EP9109	EP9124
7, 14, 21, 28	35	EP9102	EP9117	30, 60, 90, 120	150	EP9110	EP9125
8, 16, 24, 32	40	EP9103	EP9118	35, 70, 105, 140	175	EP9111	EP9126
9, 18, 27, 36	45	EP9104	EP9119	40, 80, 120, 160	200	EP9112	EP9127
10, 20, 30, 40	50	EP9105	EP9120	45, 90, 135, 180	225	EP9113	EP9128
12, 24, 36, 48	60	EP9106	EP9121	50, 100, 150, 200	250	EP9114	EP9129
15, 30, 45, 60	75	EP9107	EP9122				

† Whichever is greater. Delay times referenced from input to leading edges at 25°C, 5.0V, with no load.

DC Electrical Characteristics					
Parameter	Test Conditions	Min	Max	Unit	
V _{OH}	High-Level Output Voltage	V _{CC} = min. V _{IL} = max. I _{OH} = max	2.7		V
V _{OL}	Low-Level Output Voltage	V _{CC} = min. V _{IH} = min. I _{OL} = max		0.5	V
V _{IK}	Input Clamp Voltage	V _{CC} = min. I _I = I _{IK}		-1.2	V
I _{IH}	High-Level Input Current	V _{CC} = max. V _{IN} = 2.7V		50	µA
		V _{CC} = max. V _{IN} = 5.25V		1.0	mA
I _{IL}	Low-Level Input Current	V _{CC} = max. V _{IN} = 0.5V		-2	mA
I _{OS}	Short Circuit Output Current	V _{CC} = max. V _{OUT} = 0. (One output at a time)	-40	-100	mA
I _{CCH}	High-Level Supply Current	V _{CC} = max. V _{IN} = OPEN		75	mA
I _{CCL}	Low-Level Supply Current	V _{CC} = max. V _{IN} = 0		75	mA
T _{RO}	Output Rise Time	T _d ≤ 500 nS (0.75 to 2.4 Volts)		4	nS
N _H	Fanout High-Level Output	V _{CC} = max. V _{OH} = 2.7V		20	TTL LOAD
N _L	Fanout Low-Level Output	V _{CC} = max. V _{OL} = 0.5V		10	TTL LOAD

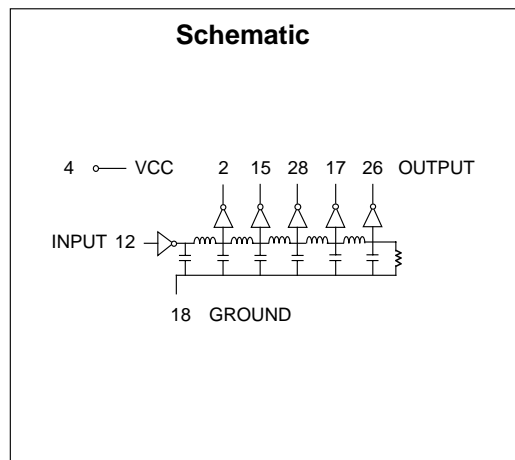

Recommended Operating Conditions					Input Pulse Test Conditions @ 25° C			Unit	
Parameter	Test Conditions	Min	Max	Unit	Parameter	Test Conditions	Min	Max	Unit
V _{CC}	Supply Voltage	4.75	5.25	V	E _{IN}	Pulse Input Voltage	3.2		Volts
V _{IH}	High-Level Input Voltage	2.0		V	P _W	Pulse Width % of Total Delay	110		%
V _{IL}	Low-Level Input Voltage		0.8	V	T _{RI}	Pulse Rise Time (0.75 - 2.4 Volts)	2.0		nS
I _{IK}	Input Clamp Current		-18	mA	PRR	Pulse Repetition Rate @ T _d ≤ 200 nS	1.0		MHz
I _{OH}	High-Level Output Current		-1.0	mA		Pulse Repetition Rate @ T _d > 200 nS	100		KHz
I _{OL}	Low-Level Output Current		20	mA	V _{CC}	Supply Voltage	5.0		Volts
P _W *	Pulse Width of Total Delay	40		%					
d*	Duty Cycle		40	%					
T _A	Operating Free-Air Temperature	0	+70	°C					

*These two values are inter-dependent.

