

DESCRIPTION

The Hyundai HY57V654010 is a 67,108,864-bit CMOS Synchronous DRAM, ideally suited for the main memory applications which require large memory density and high bandwidth. HY57V654010 is organized as 2banks of 8,388,608x4.

HY57V654010 is offering fully synchronous operation referenced to a positive edge of the clock. All inputs and outputs are synchronized with the rising edge of the clock input. The data paths are internally pipelined to achieve very high bandwidth. All input and output voltage levels are compatible with LVTTL.


Programmable options include the length of pipeline (Read latency of 1,2, or 3), the number of consecutive read or write cycles initiated by a single control command (Burst length of 1,2,4,8, or full page), and the burst count sequence(sequential or interleave). A burst of read or write cycles in progress can be terminated by a burst terminate command or can be interrupted and replaced by a new burst read or write command on any cycle. (This pipelined design is not restricted by a `2N` rule.)

FEATURES

- Single 3.3V±0.3V power supply
- All device pins are compatible with LVTTL interface
- JEDEC standard 400mil 54pin TSOP-II with 0.8mm of pin pitch
- All inputs and outputs referenced to positive edge of system clock
- Data mask function by DQM
- Internal two banks operation
- Auto refresh and self refresh
- 4096 refresh cycles / 64ms
- Programmable Burst Length and Burst Type
 - 1, 2, 4, 8 and Full Page for Sequential Burst
 - 1, 2, 4 and 8 for Interleave Burst
- Programmable $\overline{\text{CAS}}$ Latency ; 1, 2, 3 Clocks

ORDERING INFORMATION

Part No.	Clock Frequency	Power	Organization	Interface	Package
HY57V654010TC-8	125MHz	Normal	2Banks x 8Mbits x4	LVTTL	400mil 54pin TSOP II
HY57V654010TC-10	100MHz				
HY57V654010TC-12	83MHz				
HY57V654010LTC-8	125MHz	Low power			
HY57V654010LTC-10	100MHz				
HY57V654010LTC-12	83MHz				

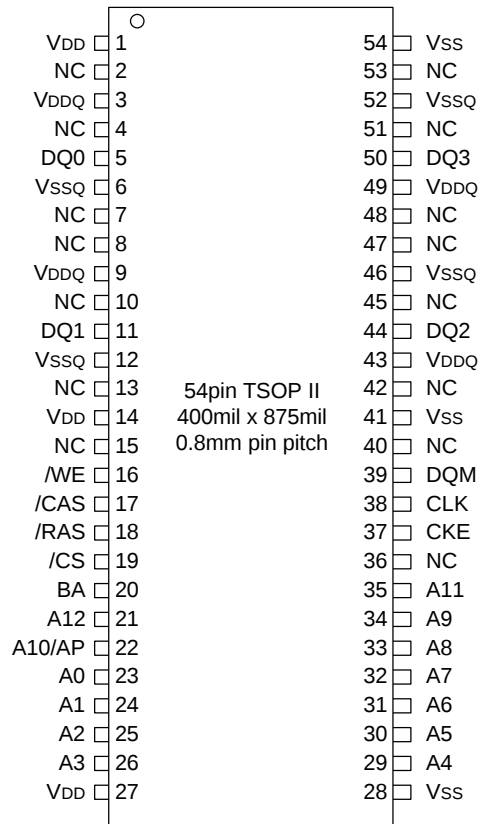PIN CONFIGURATION

PIN DESCRIPTION

PIN	PIN NAME	DESCRIPTION
CLK	Clock	The system clock input. All other inputs are registered to the SDRAM on the rising edge of CLK.
CKE	Clock Enable	Controls internal clock signal and when deactivated, the SDRAM will be one of the states among power down, suspend or self refresh.
$\overline{CS}$	Chip Select	Command input enable or mask except CLK, CKE and DQM
BA0	Bank Address	Select either one of banks during both $\overline{RAS}$ and $\overline{CAS}$ activity.
A0 ~ A12	Address	Row Address : RA0 ~ RA12, Column Address : CA0 ~ CA9 Auto-precharge flag : A10
$\overline{RAS}$, $\overline{CAS}$, $\overline{WE}$	Row Address Strobe, Column Address Strobe, Write Enable	$\overline{RAS}$, $\overline{CAS}$ and $\overline{WE}$ define the operation. Refer function truth table for details
DQM	Data Input/Output Mask	DQM control output buffer in read mode and masks input data in write mode
DQ0 ~ DQ3	Data Input/Output	Multiplexed data input / output pin
VDD/VSS	Power Supply/Ground	Power supply for internal circuit and input buffer
VDDQ/VSSQ	Data Output Power/Ground	Power supply for DQ
NC	No Connection	No connection

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Rating	Unit
Ambient Temperature	TA	0 ~ 70	°C
Storage Temperature	TSTG	-55 ~ 125	°C
Voltage on Any Pin relative to VSS	VIN, VOUT	-1.0 ~ 4.6	V
Voltage on VDD relative to VSS	VDD, VDDQ	-1.0 ~ 4.6	V
Short Circuit Output Current	IOS	50	mA
Power Dissipation	PD	1	W
Soldering Temperature (Time)	TSOLDER	260 (10)	(°C) Sec

Note : Operation at above absolute maximum rating can adversely affect device reliability.

DC OPERATING CONDITION (TA=0°C to 70°C)

Parameter	Symbol	Min	Typ	Max	Unit	Note
Power Supply Voltage	VDD, VDDQ	3.0	3.3	3.6	V	1
Input high voltage	VIH	2.0	3.0	VDD + 0.4	V	1
Input low voltage	VIL	-0.3	0	0.8	V	1

Note :

1. All voltages are referenced to VSS = 0V

AC OPERATING CONDITION (TA=0°C to 70°C, VDD=3.3V ±0.3V, VSS=0V)

Parameter	Symbol	Value	Unit	Note
AC input high / low level voltage	VIH / VIL	2.4/0.4	V	
Input timing measurement reference level voltage	Vtrip	1.4	V	
Input rise / fall time	tR / tF	1	V/ns	
Output timing measurement reference level	Voutref	1.4	V	
Output load capacitance for access time measurement	CL	50	pF	1


Note :

1. Output load to measure access times is equivalent to two TTL gates and one capacitor (50pF). For details, refer to AC/DC output load circuit

CAPACITANCE (TA=25°C, f=1MHz)

Parameter	Pin	Symbol	Min	Max	Unit
Input capacitance	A0 ~ A12, BA0	CI1	2	5	pF
	CLK, CKE, $\overline{CS}$, $\overline{RAS}$, $\overline{CAS}$, $\overline{WE}$, DQM	CI2	2	5	pF
Data input / output capacitance	DQ0 ~ DQ3	CI/O	2	7	pF

OUTPUT LOAD CIRCUIT

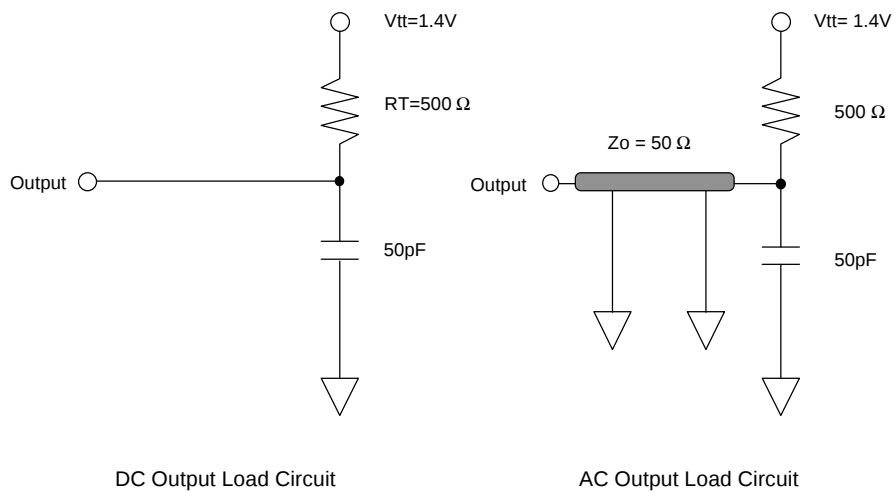

DC CHARACTERISTICS I (TA=0°C to 70°C, VDD=3.3V±0.3V)

Parameter	Symbol	Min.	Max	Unit	Note
Input leakage current	ILI	-1	1	uA	1
Output leakage current	ILO	-1	1	uA	2
Output high voltage	VOH	2.4	-	V	IOH = -2mA
Output low voltage	VOL	-	0.4	V	IOL = +2mA

Note :

- VIN = 0 to 3.6V, All other pins not under test = 0V
- DOUT is disabled, VOUT=0 to 3.6V

DC CHARACTERISTICS II (TA=0°C to 70°C, VDD=3.3V±0.3V, VSS=0V)

Paramter	Symbol	Test Condition		Speed			Unit	Note
				-8	-10	-12		
Operating Current	IDD1	Burst Length=1, One bank active tRAS _i ∧tRAS(min),tRP _i ∧tRP(min), IO=0mA		90	85	70	mA	1
Precharge Standby Current in power down mode	IDD2P	CKE _i ∧VIL(max), tCK = 15ns		2			mA	
	IDD2PS	CKE _i ∧VIL(max), tCK = ∞		2				
Precharge Standby Current in non power down mode	IDD2N	CKE _i ∧VIH(min), $\overline{\text{CS}}_i$ ∧VIH(min), tCK = 15ns Input signals are changed one time during 30ns. All other pins _i ∧VDD-0.2V or _i ∧0.2V		15			mA	
	IDD2NS	CKE _i ∧VIH(min), tCK = ∞ Input signals are stable.		15				
Active Standby Current in power down mode	IDD3P	CKE _i ∧VIL(max), tCK = 15ns		5			mA	
	IDD3PS	CKE _i ∧VIL(max), tCK = ∞		5				
Active Standby Current in non power down mode	IDD3N	CKE _i ∧VIH(min), $\overline{\text{CS}}_i$ ∧VIH(min), tCK = 15ns Input signals are changed one time during 30ns. All other pins _i ∧VDD-0.2V or _i ∧0.2V		35			mA	
	IDD3NS	CKE _i ∧VIH(min), tCK = ∞ Input signals are stable		35				
Burst Mode Operating Current	IDD4	tCK _i ∧tCK(min), tRAS _i ∧tRAS(min), IO=0mA All banks active	CL=3	100	90	80	mA	1
			CL=2	80	70	60		
Auto Refresh Current	IDD5	tRRC _i ∧tRRC(min), All banks active		160			mA	2
Self Refresh Current	IDD6	CKE _i ∧0.2V		2			mA	3
				500			uA	4

Note :

- 1.IDD1 and IDD5 depend on output loading and cycle rates. Specified values are measured with the output open.
- 2.Min. of tRRC (Refresh RAS cycle time) = 96ns
- 3.HY57V654010TC-8/10/12
- 4.HY57V654010LTC-8/10/12

AC CHARACTERISTICS I

Paramter		Symbol	-8		-10		-12		Unit	Note
			Min	Max	Min	Max	Min	Max		
System clock cycle time	$\overline{\text{CAS}}$ Latency = 3	tCK3	8	1000	10	1000	12	1000	ns	
	$\overline{\text{CAS}}$ Latency = 2	tCK2	12		13		15		ns	
Clock high pulse width		tCHW	3	-	3	-	3	-	ns	1
Clock low pulse width		tCLW	3	-	3	-	3	-	ns	1
Access time from clock	$\overline{\text{CAS}}$ Latency = 3	tAC3	-	6		8	-	9	ns	
	$\overline{\text{CAS}}$ Latency = 2	tAC2	-	6		8	-	9	ns	
Data-out hold time		tOH	3	-	3	-	3	-	ns	
Data-Input setup time		tDS	2	-	3	-	3	-	ns	1
Data-Input hold time		tDH	1	-	1	-	1	-	ns	1
Address setup time		tAS	2	-	3	-	3	-	ns	1
Address hold time		tAH	1	-	1	-	1	-	ns	1
CKE setup time		tCKS	2	-	2	-	3	-	ns	1
CKE hold time		tCKH	1	-	1	-	1	-	ns	1
Command setup time		tCS	2	-	2	-	3	-	ns	1
Command hold time		tCH	1	-	1	-	1	-	ns	1
CLK to data output in low Z-time		tOLZ	1	-	1	-	1	-	ns	
CLK to data output in high Z-time	$\overline{\text{CAS}}$ Latency = 3	tOHZ3	-	6	-	8	-	9	ns	
	$\overline{\text{CAS}}$ Latency = 2	tOHZ2	-	6	-	8	-	9	ns	

Note :

1.Assume tR / tF (input rise and fall time) is 1ns.

AC CHARACTERISTICS II

Paramter		Symbol	-8		-10		-12		Unit	Note
			Min	Max	Min	Max	Min	Max		
$\overline{\text{RAS}}$ cycle time	Operation	tRC	72	-	80	-	90	-	ns	
	Auto Refresh	tRRC	96	-	96	-	96	-	ns	
$\overline{\text{RAS}}$ to $\overline{\text{CAS}}$ delay		tRCD	20	-	24	-	30	-	ns	
$\overline{\text{RAS}}$ active time		tRAS	48	100K	50	100K	60	100K	ns	
$\overline{\text{RAS}}$ precharge time		tRP	24	-	30	-	30	-	ns	
$\overline{\text{RAS}}$ to $\overline{\text{RAS}}$ bank active delay		tRRD	16	-	20	-	24	-	ns	
$\overline{\text{CAS}}$ to $\overline{\text{CAS}}$ delay		tCCD	1	-	1	-	1	-	CLK	
Write command to data-in delay		tWTL	0	-	0	-	0	-	CLK	
Data-in to precharge command		tDPL	1	-	1	-	1	-	CLK	
Data-in to active command		tDAL	4	-	4	-	4	-	CLK	
DQM to data-out Hi-Z		tDQZ	2	-	2	-	2	-	CLK	
DQM to data-in mask		tDQM	0	-	0	-	0	-	CLK	
MRS to new command		tMRD	2	-	2	-	2	-	CLK	
Precharge to data output Hi-Z	$\overline{\text{CAS}}$ Latency = 3	tPROZ3	3	-	3	-	3	-	CLK	
	$\overline{\text{CAS}}$ Latency = 2	tPROZ2	2	-	2	-	2	-	CLK	
Power down exit time		tPDE	1	-	1	-	1	-	CLK	
Self refresh exit time		tSRE	1	-	1	-	1	-	CLK	
Refresh Time		tREF	64	-	64	-	64	-	ms	

DEVICE OPERATING OPTION TABLE
HY57V654010TC-8

	CAS Latency	tRCD	tRAS	tRC	tRP	tAC	tOH
125MHz	3CLKs	3CLKs	6CLKs	9CLKs	3CLKs	6ns	3ns
100MHz	3CLKs	2CLKs	5CLKs	8CLKs	3CLKs	6ns	3ns
83MHz	2CLKs	2CLKs	4CLKs	6CLKs	2CLKs	6ns	3ns
66MHz	2CLKs	2CLKs	4CLKs	6CLKs	2CLKs	6ns	3ns

HY57V654010TC-10

	CAS Latency	tRCD	tRAS	tRC	tRP	tAC	tOH
100MHz	3CLKs	3CLKs	5CLKs	8CLKs	3CLKs	8ns	3ns
83MHz	2CLKs	2CLKs	5CLKs	8CLKs	3CLKs	8ns	3ns
66MHz	2CLKs	2CLKs	4CLKs	6CLKs	2CLKs	8ns	3ns
50MHz	2CLKs	2CLKs	3CLKs	5CLKs	2CLKs	8ns	3ns

HY57V654010TC-12

	CAS Latency	tRCD	tRAS	tRC	tRP	tAC	tOH
83MHz	2CLKs	3CLKs	5CLKs	8CLKs	3CLKs	9ns	3ns
66MHz	2CLKs	2CLKs	4CLKs	6CLKs	2CLKs	9ns	3ns
50MHz	2CLKs	2CLKs	3CLKs	5CLKs	2CLKs	9ns	3ns
33MHz	2CLKs	1CLK	2CLKs	3CLKs	1CLK	9ns	3ns

COMMAND TRUTH TABLE

Command		CKEn-1	CKEn	$\overline{CS}$	$\overline{RAS}$	$\overline{CAS}$	$\overline{WE}$	DQM	ADDR	A10/ AP	BA	Note
Mode Register Set		H	X	L	L	L	L	X	OP code			
No Operation		H	X	H	X	X	X	X	X			
				L	H	H	H					
Bank Active		H	X	L	L	H	H	X	RA		V	
Read		H	X	L	H	L	H	X	CA	L	V	
Read with Autoprecharge										H		
Write		H	X	L	H	L	L	X	CA	L	V	
Write with Autoprecharge										H		
Precharge All Bank		H	X	L	L	H	L	X	X	H	X	
Precharge selected Bank										L	V	
Burst Stop		H	X	L	H	H	L	X	X			
DQM		H	X					V	X			
Auto Refresh		H	H	L	L	L	H	X	X			
Self Refresh	Entry	H	L	L	L	L	H	X	X			
	Exit	L	H	H	X	X	X	X				
				L	H	H	H					
Precharge power down	Entry	H	L	H	X	X	X	X	X			
				L	H	H	H					
	Exit	L	H	H	X	X	X	X				
				L	H	H	H					
Clock Suspend	Entry	H	L	H	X	X	X	X	X			
				L	V	V	V					
	Exit	L	H	X				X				

Note :

V = Valid, X = Dont care, H = Logic High, L= Logic Low.