




BVU-5E1QH4# BVT-5E1QH4#


DESCRIPTION

Dice Material : AlGaInP/GaAs Orange Red
Light Color : Orange Red Color
Lens Color : Water Transparent
Stand-Off P/N : BVU-5E1QH4# R

RADIATION PATTERN

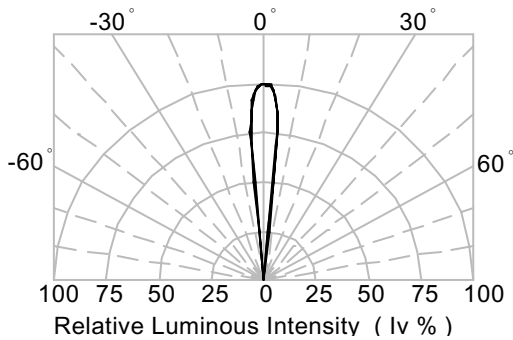

PACKAGE CONFIGURATION

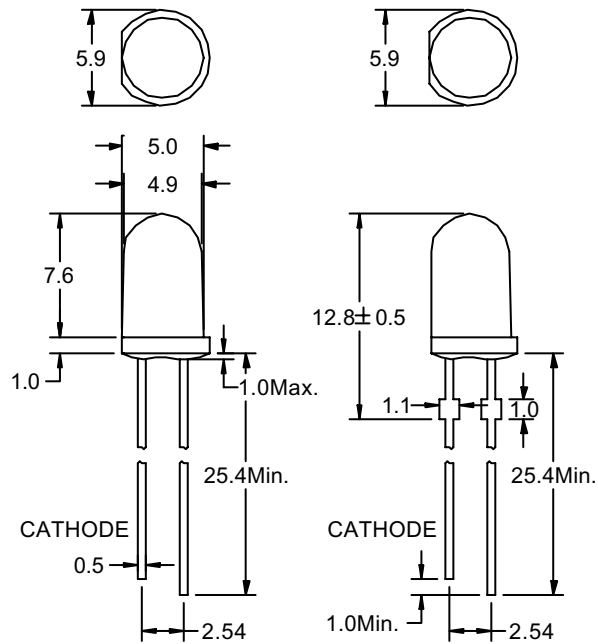

Tolerance $\pm 0.25 \text{ mm}$

ABSOLUTE MAXIMUM RATINGS AT Ta = 25 °C

PARAMETER	MAX.	UNIT
Power Dissipation	75	mW
Continuous Forward Current	30	mA
Peak Forward Current (1/10 Duty Cycle , 0.1ms Pulse Width)	160	mA
Reverse Voltage	5	V
Derating Linear From 50 °C	0.4	mA/°C
Operating Temperature Range	−40 °C to + 100 °C	
Storage Temperature Range	−40 °C to + 100 °C	
Lead Solder Temperature 1.6 mm Below Package 260 °C for 5 seconds		

ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta = 25 °C

SYMBOL	PARAMETER	TEST COND.	MIN.	TYP.	MAX.	UNIT
V F	Forward Voltage	I F = 20 mA		1.8	2.4	V
I R	Reverse Current	V R = 5V			100	μ A
λ p	Peak Emission Wavelength	I F = 20 mA		630		n m
λ d	Dominant Wavelength	I F = 20 mA		626		n m
2 θ 1/2	Viewing Angle	I F = 20 mA		15		Deg

BIN GRADE LIMITS (I F = 20 mA) LUMINOUS INTENSITY / mcd

Device	☐ BVU-5E1QH4D	☐ BVU-5E1QH4E	☐ BVU-5E1QH4F	☐ BVU-5E1QH4G								
Bin	F	G	H	I	J	K	L	M	N	O	P	Q
Min.	360	465	600	780	1000	1300	1680	2180	2800	3600	4650	6000
Max.	465	600	780	1000	1300	1680	2180	2800	3600	4650	6000	7800

Tolerance $\pm 15\% \text{ mcd}$

*Bright View reserves the rights to alter specifications and remove availability of products at any time without notice.

*Dominant Wavelength, λ d is according to CIE Chromaticity Diagram base on color of lamps.

* θ 1/2 is the off-axis angle where the luminous intensity is one half the on-axis intensity.