







Telecommunication ADSL Transformer Transformers

DT32-3004

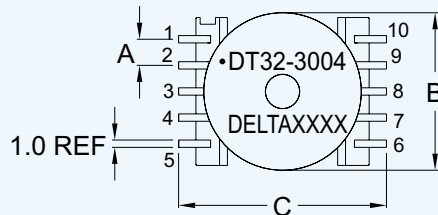

XXXX: DATE CODE
WHITE DOT ON PIN 1



DIMENSIONS IN mm

A	B	C	D	E	F	G
3.81±0.3	24.2 MAX.	26.7 MAX.	20.3±0.3	3.51±1	12.7 MAX.	

ELECTRICAL CHARACTERISTICS	
URNS RATIO (N1 : N2 & N3 : N4)	1 : 1: 1 : 1±2% @10KHz, 0.1V
INDUCTANCE (PRI)	440 uH ± 5% @10KHz, 0.1V
LEAKAGE INDUCTANCE	15 uH Max. @100KHz, 0.1V
D.C. RESISTANCE	N1, N2: 0.16 Ω ± 10% N3, N4: 1.2 ± Ω 10%
INSERTION LOSS	3 dB Max. @40KHz ~ 2MHz
TOTAL HARMONIC DISTORTION	-70 dB Max. @40KHz, 14dBm
DIELECTRIC STRENGTH	2000 VAC, 2 SEC @PRI TO SEC

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 31-1, SHIEN PAN ROAD, KUEI SAN INDUSTRIAL ZONE, TAOYUAN SHIEN, TAIWAN, R.O.C.

TEL: 886-3-3626301 FAX: 886-3-3618901

http://www.deltaww.com