
HVU351

Variable Capacitance Diode for VCO

HITACHI

ADE-208-037E (Z)
Rev. 5


Features

- Low series resistance. ($r_s = 0.35\Omega_{max}$)
- Ultra small Resin Package (URP) is suitable for surface mount design.

Ordering Information

Type No.	Laser Mark	Package Code
HVU351	6	URP

Outline

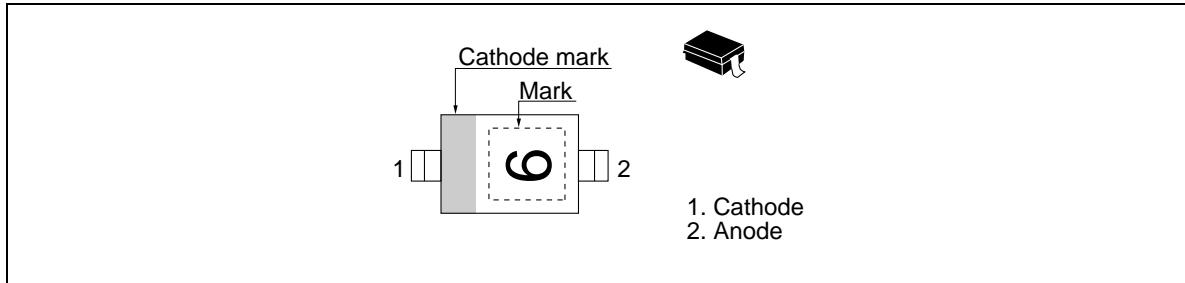

HVU351

Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Value	Unit
Reverse voltage	V _R	10	V
Junction temperature	T _j	125	°C
Storage temperature	T _{stg}	-55 to +125	°C

Electrical Characteristics (Ta = 25°C)

Item	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse current	I _{R1}	—	—	10	nA	V _R = 10V
	I _{R2}	—	—	100		V _R = 10V, Ta = 60°C
Capacitance	C ₂	14.0	—	16.0	pF	V _R = 2V, f = 1MHz
	C ₁₀	5.0	—	6.5		V _R = 10V, f = 1MHz
Capacitance ratio	n	2.00	—	—	—	C ₂ /C ₁₀
Series resistance	r _s	—	—	0.35	Ω	V _R = 1V, f = 470MHz

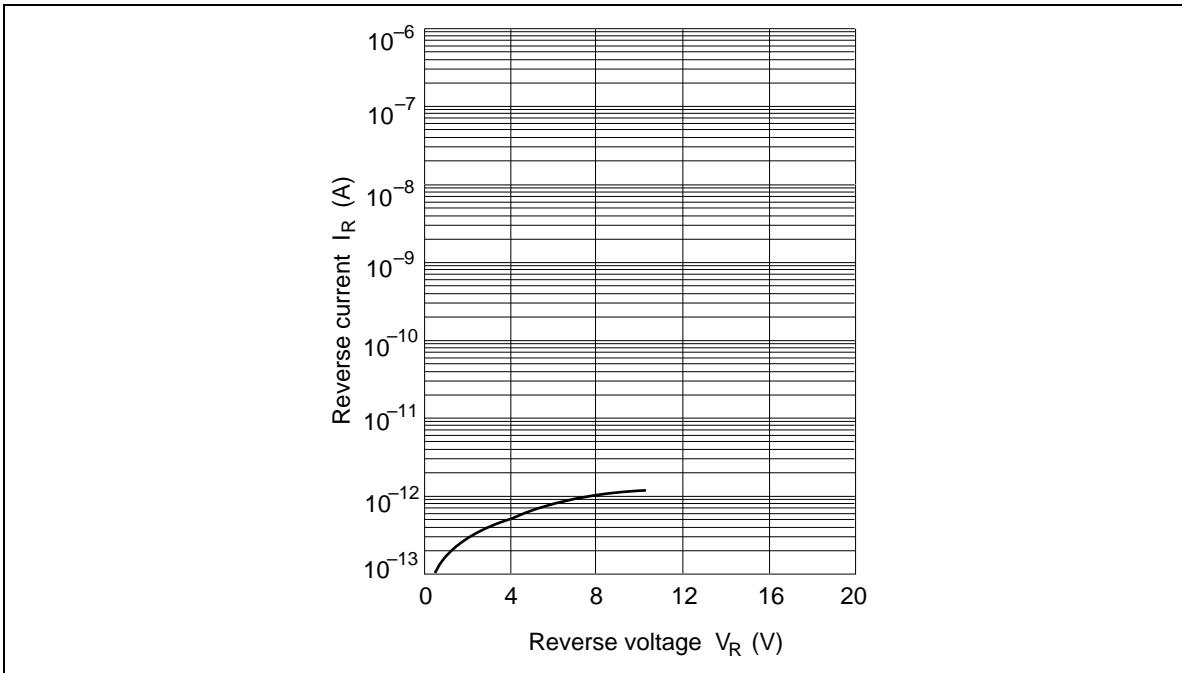


Fig.1 Reverse current Vs. Reverse voltage

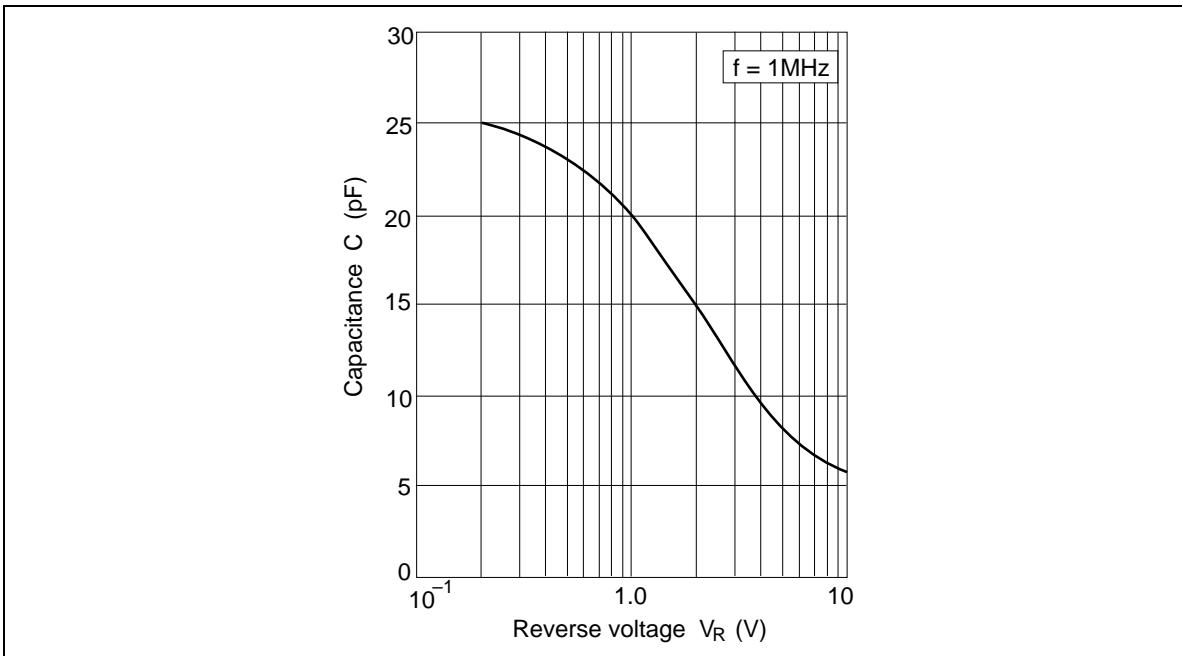


Fig.2 Capacitance Vs. Reverse voltage

HVU351

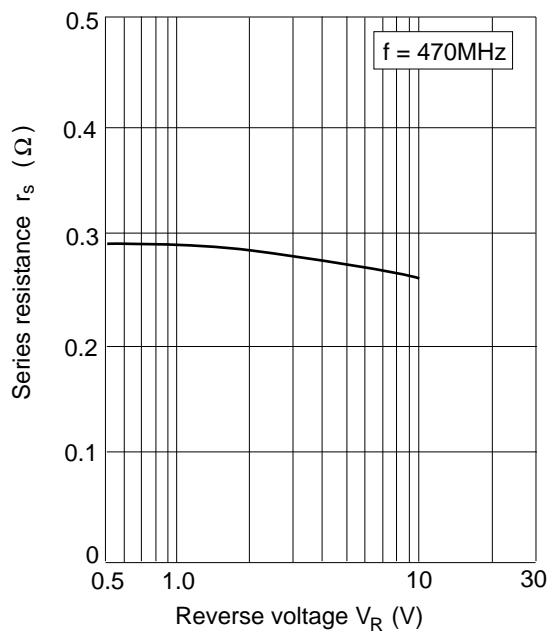


Fig.3 Series resistance Vs. Reverse voltage

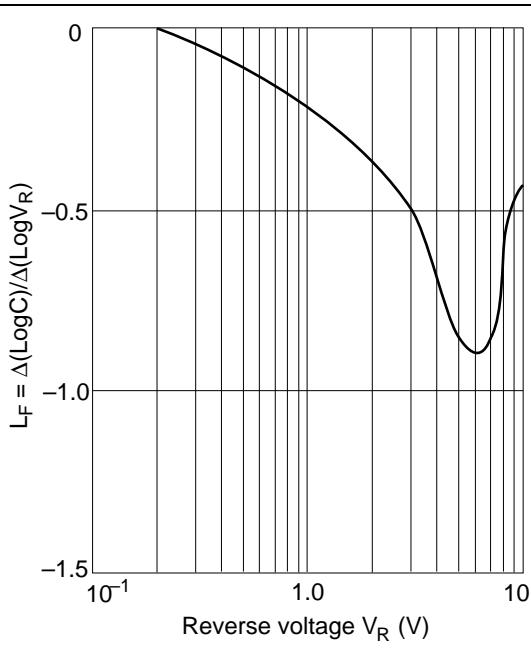


Fig.4 Linearity factor Vs. Reverse voltage

Package Dimensions