

UTCUR132 LINEAR INTEGRATED CIRCUIT

200mA LOW DROPOUT LINEAR VOLTAGE REGULATOR

DESCRIPTION


The UTC UR132 is a 200mA fixed output voltage low dropout linear regulator. Wide range of available output voltage fits most of applications. Built-in output current-limiting most thermal-limiting provide maximal protection against any fault conditions.

FEATURES

- *Guaranteed 200mA output current
- *Input voltage range up to 12V
- *Extremely tight load regulation
- *Fast transient response
- *Current-limiting and Thermal-limiting
- *Three-terminal adjustable or fixed
1.5V, 1.8V, 2.2V, 2.5V, 3.3V, 5V.

APPLICATIONS

- *Voltage regulator for LAN Card, CD-ROM, and DVD
- *Wireless communication systems

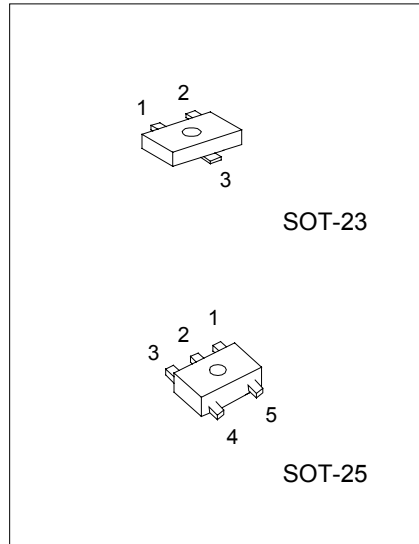


SOT-23 : 1: V_{OUT} 2: GND 3: V_{IN}
 SOT-25 : 1: V_{IN} 2: GND 3: NC 4: NC 5: V_{OUT}

PIN DESCRIPTION

NAME	FUNCTION
V _{OUT}	Output
GND	Ground/Adjustable
V _{IN}	Positive Power Input

Function Block Diagram

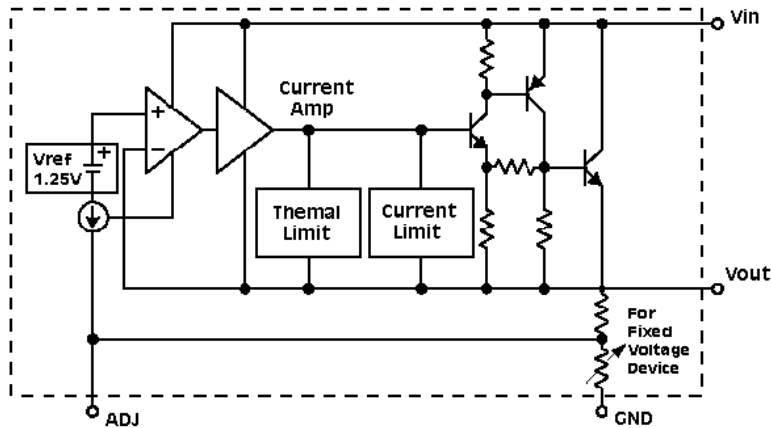

UTC UR132 LINEAR INTEGRATED CIRCUIT

ABSOLUTE MAXIMUM RATINGS

PARAMETER	MIN.	TYP.	MAX.	UNIT
Input Voltage V_{in}	-0.3		12	V
Operating Junction Temperature Range	-40		125	°C
Storage Temperature Range	-65		150	°C
Power Dissipation			0.3	W

UTC UR132/A 1.5V, 1.8V, 2.2V, 2.5V

ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}\text{C}$, $C_{IN}=1\mu\text{F}$, $C_{OUT}=10\mu\text{F}$, unless otherwise specified)

PARAMETER	TEST CONDITIONS	MIN	TYP.	MAX	UNITS
Output Voltage	$I_L=1\text{mA}$, $V_{IN}-V_{OUT}=1.4\text{V}$	1.47	1.50	1.53	V
		1.77	1.80	1.83	
		2.16	2.20	2.24	
		2.45	2.50	2.55	
Output Voltage Temperature Coefficient			50	150	PPM/°C
Line Regulation	$I_L=1\text{mA}$, $V_{IN}-V_{out}=2\text{V}\sim V_{in}=9\text{V}$			0.5	%VOUT
Load Regulation (note 2)	$I_L=1\text{mA}\sim 200\text{mA}$, $V_{IN}-V_{out}=2\text{V}$		10	30	mV
Current Limit (note 3)	$V_{IN}-V_{out}=2\text{V}$, $V_{OUT}=0\text{V}$	300			mA
Dropout Voltage (note 4,5)				1.3	V
Standby current	$I_L=0$, $V_{IN}=9\text{V}$			3.0	mA

UTC UR132 ADJ, 3.3V, 5.0V

ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}\text{C}$, $C_{IN}=1\mu\text{F}$, $C_{OUT}=10\mu\text{F}$, unless otherwise specified)

PARAMETER	TEST CONDITIONS	MIN	TYP.	MAX	UNITS
Adjustable ($R_1=120\Omega$, $R_2=200\Omega$, $V_{out}=3.3\text{V}$)					
Reference Voltage	$V_{in}-V_o=2\text{V}$, $I_L=1\text{mA}$	1.238	1.250	1.262	V
Output Voltage	$I_L=1\text{mA}$, $V_{IN}-V_{OUT}=1.4\text{V}$	3.23	3.30	3.37	V
		4.90	5.00	5.10	
Output Voltage Temperature Coefficient			50	150	PPM/°C
Line Regulation	$I_L=1\text{mA}$, $V_{IN}-V_{out}=2\text{V}\sim V_{in}=12\text{V}$			0.5	%VOUT
Load Regulation (note 2)	$I_L=1\text{mA}\sim 200\text{mA}$, $V_{IN}-V_{out}=2\text{V}$		10	30	mV
Current Limit (note 3)	$V_{IN}-V_{out}=2\text{V}$, $V_{OUT}=0\text{V}$	300			mA
Dropout Voltage (note 4,5)				1.3	V
Standby current	$I_L=0$, $V_{IN}=12\text{V}$			5.0	mA

Note 1: Guaranteed by design.

Note 2: Regulation is measured at constant junction temperature, using pulsed ON time.


Note 3: Current Limit is measured at constant junction temperature, using pulsed ON time.

Note 4: Dropout is measured at constant junction temperature, using pulsed ON time, and the criterion is V_{OUT} inside target value $\pm 2\%$.

Note 5: Dropout test is skipped at the condition of $V_{IN}<3\text{V}$.

UTCUR132 LINEAR INTEGRATED CIRCUIT

TYPICAL APPLICATION CIRCUIT

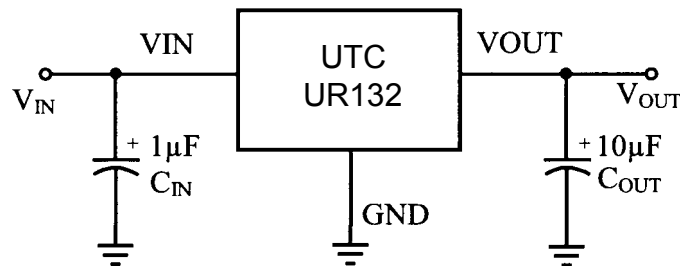


APPLICATION INFORMATION

A 10µF (or larger) capacitor is recommended between VOUT and GND for stability. The part may oscillate without the capacitor. Any type of capacitor can be used, but not Aluminum electrolytics when operating below -25°C. The capacitance may be increased without limit.

A 1µF capacitor (or larger) should be placed between VIN to GND.

UR132 ADJUSTABLE

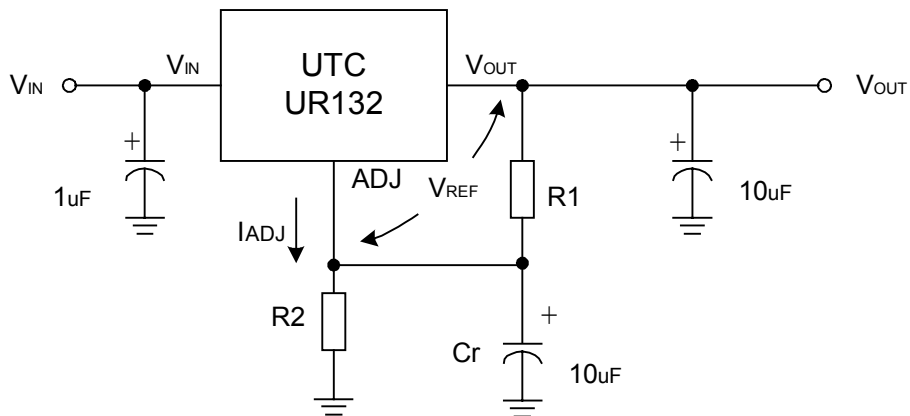

Cr: 10µF to improve ripple rejection

$$V_{OUT} = V_{REF} \left(1 + \frac{R2}{R1} \right) + I_{ADJ} * R2$$