



**Main features**

- Pressure ranges from 0-7 to 0-500 bar
- Thick film on steel strain gauge sensor
- Output signal 4...20mA (2-wires) / 0,1...5,1Vdc / 0,1...10,1Vdc / 0...5Vdc / 0...10Vdc / 1...5Vdc / 1...10Vdc
- Protection degree: IP60 for connector output, IP65 for cable output.

The TKF transmitters are based on the measurement principle of the strain gauge in which the primary measuring elements are not glued but deposited directly on the reaction diaphragm using a thick film serigraphic process.

The high stability electronic components enable the transmitters to be used in applications that require transmission of the output signal over long distances or for intelligent control systems.

The TKF pressure transmitters have been designed for pressure measurement in the field of industrial refrigeration and HVC.


They are also used for monitoring and control in a wide range of mechanical installations.

**TECHNICAL DATA**

Output signal	VOLTAGE	CURRENT
Class of sensor	H = 0,5%	M = 1%
Resolution	Infinite	
Range of measurement	from 0-7 to 0-500bar	
Max. applicable pressure (20sec without degradation of the specific.)	2 times rated Full Scale	
Rupture pressure	3 times rated FSO (max.1000bar)	
Supply voltage	15...30Vdc	10...30Vdc
Maximum current drain	12mA	32mA
Isolation resistance at 50Vdc	>1000MΩ	
Output at nominal pressure H = ± 0,5% FSO M = ± 1% FSO	B 5,1Vdc C 10,1Vdc M/P 5Vdc N/Q 10Vdc	E 20mA
Output at ambient pressure H = ± 0,5% FSO M = ± 1% FSO	B/C 0,1Vdc M/N 0 Vdc P/Q 1Vdc	E 4mA
Max. admissible load	1mA	see diagr.
Max. response time (10...90%FSO)	4 msec.	8 msec.
Output noise (RMS 10-400Hz)	<0,05% FSO	
Output short circuit and supply polarity inversion protection	YES	
Prot. against output voltage spikes	YES	NO
Compensated temperature range	-10...+70°C	
Max temperature range	-20...+80°C	
Storage temperature range	-30...+85°C	
Thermal drift in compensated range	Zero Sensitivity	<0,02 %FSO/°C
Wetted material	1.4540/1.4016 stainless steel	
Case material	AISI 304 Stainless steel Nylon 66GF35VO	
Protection degree	IP60 connector / IP65 cable	
Electrical connections	mod. F	Shielded cable
	mod. M	DIN43650-ISO4400 4p conn.

FSO = Full Scale Output (output signal at nominal pressure)

**MECHANICAL DIMENSIONS**


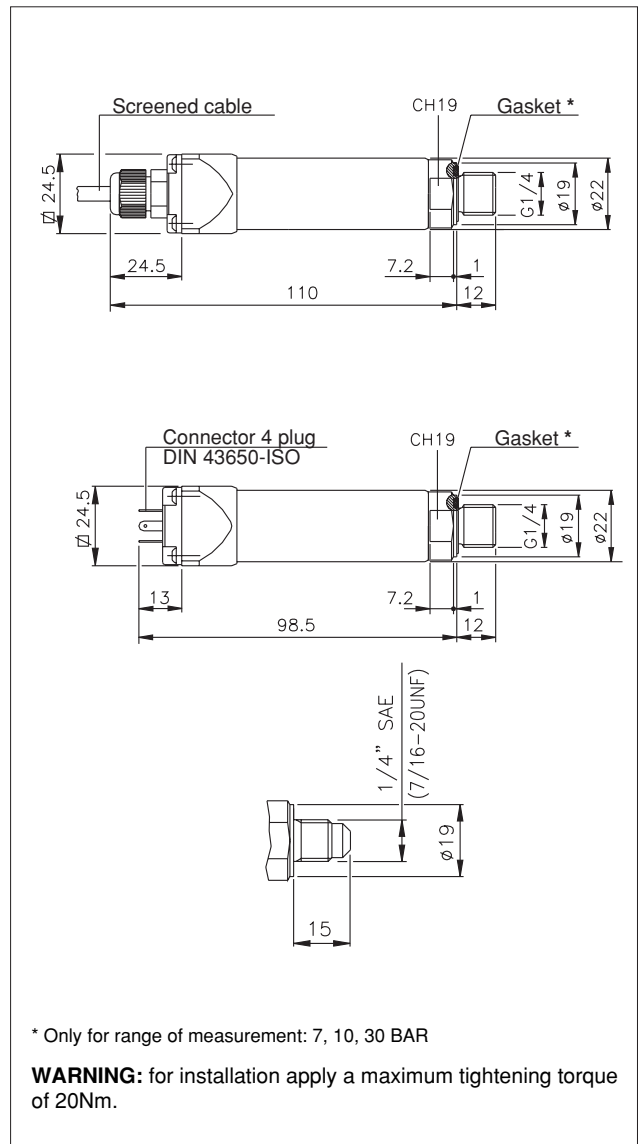


\* Only for range of measurement: 7, 10, 30 BAR


**WARNING:** for installation apply a maximum tightening torque of 20Nm.

# ELECTRICAL CONNECTIONS

## VOLTAGE AMPLIFIED OUTPUT - mod. B/C/M/N


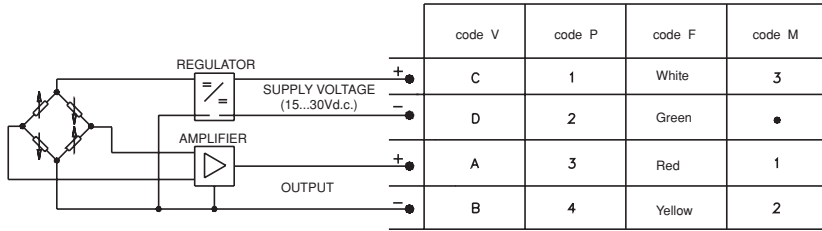


DIN43650 - ISO4400  
4-pole connector



2x0,25 2m.  
Shielded cable


## CURRENT AMPLIFIED OUTPUT ( 4...20mA 2wires) - mod. E

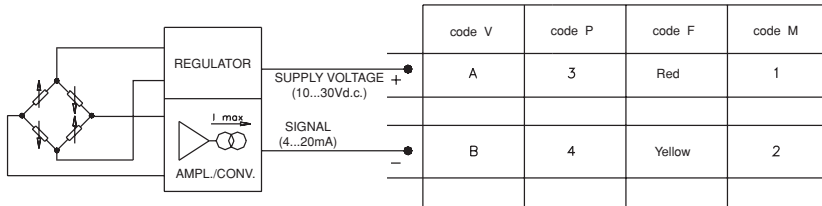

4x0,25 1m.  
Shielded cable


The cable shield is isolated from the transmitter body and it is advisable to ground it on the instrument side.

## LOAD DIAGRAM

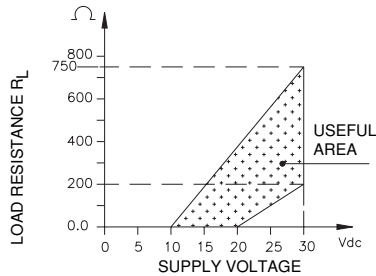

The diagram shows the optimum ratio between the load and supply voltage of the 4-20mA transmitter. For a correct use, choose any combination of load resistance and supply voltage, in the shaded area.

## ZERO and SPAN ADJUSTMENT



Nominal pressure (Span) and ambient pressure (Zero) signal adjustment can be made by relative trim pots inside the transmitter body and accessible after removing the four fixing screws of the connector.

## ORDER CODE

Pressure transmitter		TKF				
<b>OUTPUT SIGNAL</b>						
0,1...5,1Vdc	<b>B</b>					
0,1...10,1Vdc	<b>C</b>					
4...20mA (2-wires)	<b>E</b>					
0...5Vdc	<b>M</b>					
0...10Vdc	<b>N</b>					
1...5Vdc	<b>P</b>					
1...10Vdc	<b>Q</b>					
<b>PRESSURE FITTING</b>						
<b>THREAD</b>						
G 1/4 male	<b>1</b>					
1/4" SAE (7/16-20UNF)	<b>2</b>					
<b>ELECTRICAL CONNECTIONS</b>						
Shielded cable	<b>F</b>					
4 pole connector DIN43650 - ISO4400	<b>M</b>					
<b>MEASUREMENT RANGE bar</b>						
0 - 7	<b>7U</b>					
0 - 10	<b>1D</b>					
0 - 30	<b>3D</b>					
0 - 50	<b>5D</b>					
0 - 100	<b>1C</b>					
0 - 200	<b>2C</b>					
0 - 350	<b>3,5C</b>					
0 - 500	<b>5C</b>					
<b>ACCURACY CLASS</b>						
0,5%	<b>H</b>					
1%	<b>M</b>					

Ex.: TKF - E - 1 - F - 1D - M

Pressure transmitter TKF, pressure fitting G1/4 male, 4x0,25 1m. shielded cable output, range 0...10bar; accuracy class 1%.

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice.



**LEADER Electronic Co., Ltd**

116, Jianghuali, Jianghua Road, Jiangmen City, GD, PRC

Tel: + 86 750 3101711, 3379183

Fax: + 86 750 3388669

Website: www.leadersensors.com

E-mail: leader@leadersensors.com



cod. 85961 -11/01