




B-6 形外壳尺寸




B-3 形外壳尺寸



C 形外壳尺寸

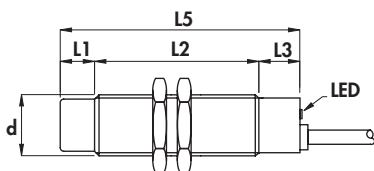

G 形外壳尺寸

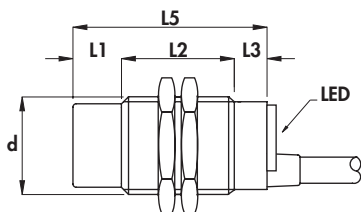

技术参数:

- △工作电压: 10-50Vdc/Vac
- △电源频率: 40-60Hz
- △断开状态电流: 1mA
- △最小工作电流: 5mA
- △电压降: 5V
- △工作温度: -25-70°C
- △最大温度漂移: ±10%
- △重复精度: 2%
- △开关迟滞: 10%
- △防护等级: IP67
- △开关状态显示: 黄色LED
- △电缆内芯截面积: 0.34mm² (8/12mm传感器)
0.50mm² (18mm传感器)
0.75mm² (30mm传感器)

△短路及过载保护(型号带Y):

△电脉冲抑制(EMC):

△允许冲击和震动:

材质:

△电缆:

△8mm传感器:

△12/18/30mm传感器:

△感应面:

2m PVC CE120-22II; 90°C; 300V; 0.R

不锈钢

黄铜镀镍

塑料

符合EN60947-5-2

符合IEC68-2-27 IEC68-2-6

直径	M8x1	M12x1	M18x1	M30x1.5
螺 型号	SW13	SW17	SW24	SW36
母 厚度	4mm	4mm	4mm	5mm
最大扭矩	10Nm	15Nm	35Nm	80Nm



外形类型	齐平	非齐平	L1	L2	L3	L4	L5	电缆直径	外壳直径	感应距离	频率(Vdc)	频率(Vac)	工作电流	型号及接线图		
															常开	常闭
			mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
B-6	△		--	40	5	--	45	4	M8x1	1.5	1000	25	100	IM08-OWN-F1,5C	IM08-CWN-F1,5C	
B-6		△	5	35	5	--	45	4	M8x1	2.5	800	25	100	IM08-OWN-N2,5C	IM08-CWN-N2,5C	
B-3	△		--	43	7	--	50	4	M12x1	2	800	25	100	IM12-OWY-F002C	IM12-CWY-F002C	
B-3		△	7	36	7	--	50	4	M12x1	4	600	25	100	IM12-OWY-N004C	IM12-CWY-N004C	
C	△		--	58	12	--	70	5	M18x1	5	800	25	200	IM18-OWY-F005C	IM18-CWY-F005C	
C		△	10	48	12	--	70	5	M18x1	8	400	25	200	IM18-OWY-N008C	IM18-CWY-N008C	
G	△		--	50	10	--	60	6	M30x1.5	10	400	25	200	IM30-OWY-F010C	IM30-CWY-F010C	
G		△	15	35	10	--	60	6	M30x1.5	15	200	25	200	IM30-OWY-N015C	IM30-CWY-N015C	