




B-6形外壳尺寸




B-3形外壳尺寸



C形外壳尺寸

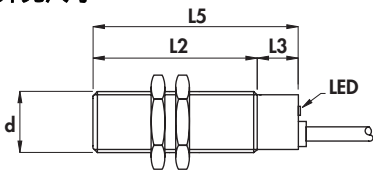

G形外壳尺寸

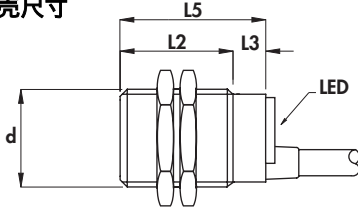

直径	M8x1	M12x1	M18x1	M30x1.5	
螺母	型号	SW13	SW17	SW24	SW36
	厚度	4mm	4mm	4mm	5mm
最大扭矩	1Nm	2Nm	5Nm	20Nm	

技术参数:

工作电压: 见参数表
 最大波纹: 10%
 空载电流: 10mA
 电压降: 1.5V (8/12mm)
 2.2V (18/30mm)

工作温度: -25-70
 最大温度漂移: ±10%
 重复精度: 2%
 开关迟滞: 10%
 防护等级: IP67
 开关状态显示: 黄色LED
 电缆内芯截面积: 0.15mm² (8mm传感器4线)
 0.22mm² (8mm传感器3线)
 0.34mm² (12/18mm传感器4线)
 0.50mm² (30mm传感器4线)

短路及过载保护: 有
 反向连接保护: 有
 电脉冲抑制(EMC): 符合EN60947-5-2
 允许冲击和震动: 符合IEC68-2-27 IEC68-2-6

材质:

电缆: 2m PVC CE120-2211; 90 ; 300V; 0. R
 传感器: 塑料
 感应面: 塑料



外形类型	齐平	非齐平	L2	L3	L5	电缆直径	外壳直径	感应距离	工作电压	频率	工作电流	型号及接线图		
			mm	mm	mm							mm	mm	mm
B-6			40	7	47	3.5	M8x1	1.2	7-30	4	200	IM08-OPY-F1,2C/PI	IM08-CPY-F1,2C/PI	IM08-RPY-F1,2C/PI
B-6			40	7	47	3.5	M8x1	2.5	7-30	3	200	IM08-OPY-N2,5C/PI	IM08-CPY-N2,5C/PI	IM08-RPY-N2,5C/PI
B-3			42	8	50	4	M12x1	2	5-40	2	200	IM12-OPY-F002C/PI	IM12-CPY-F002C/PI	IM12-RPY-F002C/PI
B-3			42	8	50	4	M12x1	4	5-40	1.5	200	IM12-OPY-N004C/PI	IM12-CPY-N004C/PI	IM12-RPY-N004C/PI
C			50	10	60	5	M18x1	5	5-60	1	200	IM18-OPY-F005C/PI	IM18-CPY-F005C/PI	IM18-RPY-F005C/PI
C			50	10	60	5	M18x1	8	5-60	1	200	IM18-OPY-N008C/PI	IM18-CPY-N008C/PI	IM18-RPY-N008C/PI
G			50	10	60	6	M30x1.5	10	7-60	0.8	200	IM30-OPY-F010C/PI	IM30-CPY-F010C/PI	IM30-RPY-F010C/PI
G			50	10	60	6	M30x1.5	15	7-60	0.4	200	IM30-OPY-N015C/PI	IM30-CPY-N015C/PI	IM30-RPY-N015C/PI

注:表格中所列型号为PNP型,把中间字母"P"改为"N"即为NPN型

