

Attenuators



SMA MINIATURE FIXED ATTENUATOR

- Flat Frequency Response
- Low VSWR—
Precision Stainless Steel SMA Connectors
- 2 Watt Rating
- Small— 380mil Diameter Body

SPECIFICATIONS


FREQUENCY RANGE (GHz)	MODEL	ATTENUATION (dB)		POWER INPUT		VSWR (Max)	VSWR (Max)		WEIGHT (Max)	
		NOM	DEV DC-18	AVG. (W) Max	PEAK (kW) Max		DC-4	4-12.4	12.4-18	Oz
DC-18	4782	3	±0.3	2	0.2	1.15	1.30	1.50	0.5	14
		6	±0.3	2	0.2					
		10	±0.4	2	0.2					
		20	±0.5	2	0.2					

FREQUENCY RANGE (GHz)	MODEL	ATTENUATION dB		POWER INPUT		VSWR (Max)	WEIGHT (Max)	
		NOM	DEV DC-6.0	AVG. (W) Max	PEAK (kW) Max		DC-6	Oz
DC-6.0	4780	3	±0.4	2	0.2	1.20	0.5	14
		6	±0.4	2	0.2			
		10	±0.4	2	0.2			
		20	±0.5	2	0.2			

ORDERING INFORMATION: Specify model number and add dash number suffix for attenuation in dB.
For example: 4782-10

OUTLINE DRAWINGS

Model No.	A		
	10 dB	20 dB	30 dB
4780	.88	.95	1.01
4782	.88	.95	1.01

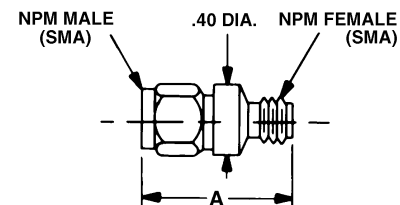

All dimensions are Max. unless otherwise specified.