



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDD-366-013 REV: 1.0

## 0.36" Dual Digit Displays

MODEL NO : ELD-366SRDB/S177 ECN :            Page: 1/5

### ■ Features :

- Industrial standard size.
- Low power consumption.
- Categorized for luminous intensity.

### ■ Applications:

- Audio equipment
- Instrument panels
- Digital readout display

### ■ Description :

- The ELD-366 series is a large 9.14mm (0.36")high seven segment display design for viewing distances up to 7 meters.
- These displays provide excellent reliability in bright ambient light .
- These device is made with red segments and black surface.

PART NO	CHIP		C.C.or C.A.
	Material	Emitted Color	
ELD-366SRDB/S177	GaAlAs	Super Red	C.A.

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936


FAX : 886-2-2267-6244,22676189,22676306

<http://www.everlight.com>





0.36" Dual Digit Displays

■ Package Dimension:

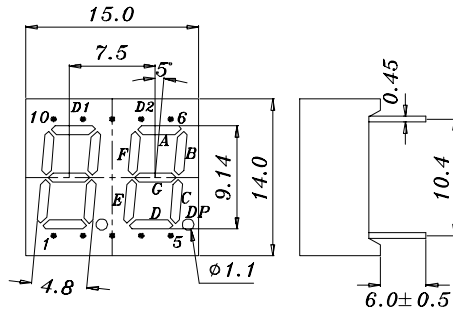

- COMMON ANODE*
- 1 CATHODE G
  - 2 CATHODE DP
  - 3 CATHODE A
  - 4 CATHODE F
  - 5 COMMON ANODE D2
  - 6 CATHODE D
  - 7 CATHODE E
  - 8 CATHODE C
  - 9 CATHODE B
  - 10 COMMON ANODE D1

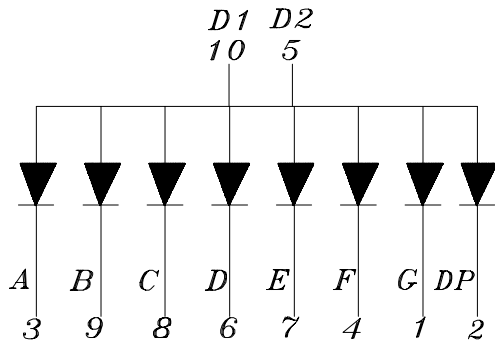

■ NOTES:

- 1.All dimensions are millimeters , tolerance is 0.25mm unless otherwise noted.
  - 2.Above specification may be changed without notice.
- Supplier will reserve authority on material change for above specification.



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDD-366-013 REV: 1.0

0.36" Dual Digit Displays

MODEL NO : ELD-366SRDB/S177 ECN : \_\_\_\_\_ Page: 3/5

■ Absolute maximum ratings at Ta = 25°C :

Parameter	Symbol	Rating	Unit
Reverse Voltage	Vr	5	V
Forward Current	If	40	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Power Dissipation	Pd	110	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	180	mA

■ Electronic optical characteristics :

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	Iv	2.8	----	6.4	mcd	If=10mA
Peak Wavelength	λ p	----	660	----	nm	If=20mA
Dominant Wavelength	λ d	----	643	----	nm	If=20mA
Spectrum Radiation Bandwidth	△ λ	----	20	----	nm	If=20mA
Forward Voltage	Vf	1.5	1.7	2.4	V	If=20mA
Reverse Current	Ir	----	----	10	μ A	Vr=5V



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDD-366-013 REV: 1.0

0.36" Dual Digit Displays

MODEL NO : ELD-366SRDB/S177 ECN : \_\_\_\_\_ Page: 4/5

■ Reliability test item and condition:					
NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1



0.36" Dual Digit Displays

## Typical Electro-Optical Characteristic Curves:

