

FREQUENCY MIXERS

Surface Mount

LEVEL 7 150 kHz to 4.3 GHz



+7 dBm LO, up to +1 dBm RF

MODEL NO.	FREQUENCY MHz		CONVERSION LOSS dB				LO-RF ISOLATION, dB			LO-IF ISOLATION, dB			CASE STYLE	CONFINITION	PRICE \$
	LO/RF f_L-f_U	IF	Mid-Band \bar{x}	σ	Max.	Total Range Max.	L Typ.	M Typ.	U Typ.	L Typ.	M Typ.	U Typ.			
◆ ALY-3	2300-2600	DC-400	5.5	.15	—	7.0	31 (typ.)	25 (min.)		15 (typ.)	12 (min.)		CB539	jx	5.95
◆ ALY-4	3300-4300	DC-600	5.7	.15	—	8.0	28 (typ.)	23 (min.)		15 (typ.)	12 (min.)		CB539	jx	5.95
◆ ASK-1-KK81	1-600	DC-600	5.58	.06	7.0	8.5	50	30	35	25	30	20	KK81	w	6.95
† ASK-2-KK81	1-1000	DC-1000	6.79	.10	8.0	9.8	60	40	35	18	26	16	KK81	w	8.25
JMS-1	2-500	DC-500	5.75	.10	7.0	8.0	55	50	45	30	40	25	BH292	ht	4.95
JMS-2	20-1000	DC-1000	7.0	.15	8.4	9.5	63	40	50	28	35	20	BH292	ht	7.45
JMS-2W	5-1200	DC-500	6.8	.10	8.0	9.0	60	40	60	30	37	20	BH292	ht	7.95
JMS-5	5-1500	DC-1000	6.0	.10	8.0	9.5	63	40	50	25	35	20	BH292	ht	9.95
JMS-11X	5-1900	5-1000	6.7	.15	8.2	9.8	58	45	35	20	27	18	BH292	hu	4.25***
◆ LRMS-1J	0.5-500	DC-500	5.94	.05	7.0	8.5	55	50	33	25	27	20	QQQ569	w	6.25
◆ LRMS-1WJ	2-750	DC-750	5.83	.21	7.5	8.5	70	45	45	28	38	22	QQQ569	w	6.75
◆ LRMS-2J	5-1000	DC-1000	6.67	.26	8.0	9.5	60	40	40	20	25	18	QQQ569	w	6.95
◆ LRMS-2DJ	5-1000	DC-1000	6.81	.06	8.0	10.0	59	40	40	30	33	22	QQQ569	w	7.25
◆ LRMS-2UJ	10-1000	10-750	6.79	.16	8.0	9.5	55	40	40	30	30	25	QQQ569	w	11.45
◆ LRMS-5J	5-1500	DC-1000	5.92	.34	7.5	9.5	60	40	40	20	30	18	QQQ569	w	13.95
◆ LRMS-11AJ	1500-1900	40-400	7.44	.36	—	9.0	25 (typ.)	17 (min.)		23 (typ.)	15 (min.)		QQQ569	w	16.95
◆ LRMS-860J	800-1050	DC-250	5.5	.23	7.5	7.5	36 (typ.)	25 (min.)		24 (typ.)	18 (min.)		QQQ569	w	11.45
◆ LRMS-30J	200-3000	DC-1000	6.8	.30	9.0	9.8	30 (typ.)	17 (min.)		27 (typ.)	7 (min.)		QQQ569	w	7.95***
RMS-1	0.5-500	DC-500	5.94	.05	7.0	8.5	55	50	33	25	27	20	TT240	w	6.25
RMS-1W	2-750	DC-750	5.83	.21	7.5	8.5	70	45	45	28	38	22	TT240	w	6.75
RMS-1BM	5-600	DC-600	6.0	.05	7.0	7.5	65	45	50	32	35	23	TT240	w	6.25
RMS-2	5-1000	DC-1000	6.67	.26	8.0	9.5	60	40	40	20	25	18	TT240	w	6.95
RMS-2D	5-1000	DC-1000	6.81	.06	8.0	10.0	59	40	40	30	33	22	TT240	w	7.25
RMS-2U	10-1000	10-750	6.79	.16	8.0	9.5	55	40	40	30	30	25	TT240	w	11.45
RMS-5	5-1500	DC-1000	5.92	.34	7.5	9.5	60	40	40	20	30	18	TT240	w	13.95
RMS-11A	1500-1900	40-400	7.44	.36	—	9.0	25 (typ.)	17 (min.)		23 (typ.)	15 (min.)		TT240	w	16.95
⊕ RMS-11F	350-2000	DC-400	5.5	.20	7.0	9.2	37	26	36	20	32	20	TT240	w	4.95***
RMS-11X	5-1900	5-1000	7.1	.10	8.2	9.8	58	45	35	20	27	18	TT240	gk	3.95***
RMS-30	200-3000	DC-1000	6.5	.20	9.0	9.8	27 (typ.)	17 (min.)		20 (typ.)	7 (min.)		TT240	w	6.95***
RMS-860	800-1050	DC-250	5.5	.23	7.5	7.5	36 (typ.)	25 (min.)		24 (typ.)	18 (min.)		TT240	w	11.45

L = low range [f_L to $10 f_L$]

M = mid range [$10 f_L$ to $f_U/2$]
m = mid band [$2f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

NOTES:

- ̄ Average of conversion loss at center of mid-band frequency ($f_L+f_U/4$)
- σ Standard deviation
- ◆ Aqueous washable. For non-aqueous requirements, LRMS units available in case style QQQ130
- † Phase detection, positive polarity except RMS-860 and LRMS-860
- ⊕ Frequency ranges specified: m = 350-1000 MHz, L = 350-750 MHz, M = 750-1000 MHz, U = 1000-2000 MHz
- *** Price for quantities 10-49
- A. Environmental specifications and re-flow soldering information available in General Information Section.
- B. Units are non-hermetic unless otherwise noted. For details on case dimensions & finishes see "Case Styles & Outline Drawings".
- C. Prices and Specifications subject to change without notice.
- 1. Absolute maximum power, voltage and current ratings:
 - 1a. RF power, 50mW
 - 1b. Peak IF current, 40mA

NSN GUIDE

MCL NO.	NSN
LRMS-1	5895-01-477-4173
RMS-1	5895-01-415-6798
RMS-2	5895-01-447-3489
RMS-2TR	5895-01-382-2092
SCM-1NL	5895-01-374-9561



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

INTERNET <http://www.minicircuits.com>

ISO 9001 CERTIFIED




+7 dBm LO, up to +1 dBm RF

MODEL NO.	FREQUENCY MHz		CONVERSION LOSS dB				LO-RF ISOLATION, dB						LO-IF ISOLATION, dB						CASE STYLE	C O M P O N E N T NO.	PRICE \$
	LO/RF f_L - f_U	IF	Mid-Band m			Total Range Max.	L		M		U		L		M		U				
			\bar{x}	σ	Max.		Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.			
SCM-1	1-500	DC-500	5.72	.10	7.0	8.0	60	40	45	35	40	30	50	40	45	35	40	25	YY101	d	4.25
SCM-2	5-1000	DC-500	5.76	.03	8.3	9.8	50	40	40	25	35	20	55	30	40	25	30	18	YY101	k	5.45
SCM-2500	500-2500	DC-500	5.88	.08	6.9	10.0	35	22	35	22	35	22	18	12	18	12	18	12	YY101	r	11.95
SKY-5G	2000-5000	DC-1000	6.6	.10	—	9.5	28 (typ.) 20 (min.)						13 (typ.) 7 (min.)						BJ398	je	14.95
SKY-7G	2000-7000	DC-1000	7.0	.10	—	9.8	28 (typ.) 15 (min.)						20 (typ.) 7 (min.)						BJ398	je	16.95
SKY-42	2000-4200	DC-1200	5.0	.30	—	8.5	31 (typ.) 20 (min.)						17 (typ.) 12 (min.)						BJ398	je	14.95
SKY-53R	2800-5300	DC-500	5.7	.20	—	9.5	28 (typ.) 15 (min.)						12 (typ.) 8 (min.)						BJ398	hp	14.95
SKY-60	2500-6000	DC-1500	6.2	.20	—	9.7	28 (typ.) 17 (min.)						14 (typ.) 8 (min.)						BJ398	je	14.95
SYM-2	2-1000	DC-1000	5.4	.10	7.2	9.5	70	45	50	30	40	25	63	40	48	24	37	20	TTT166	x	11.95
SYM-860	800-1050	DC-250	5.6	.10	7.0	7.0	39 (typ.) 25 (min.)						37 (typ.) 20 (min.)						TTT166	x	8.95
SYM-11	1-2500	10-600	7.0	.30	9.0	10.5	63	40	40	24	34	20	61	40	35	20	28	15	TTT167	x	9.95
◆ SYM-11J	1-2500	10-500	7.4	.10	8.0	9.8	64	40	43	24	35	20	60	40	35	20	30	15	CG581	ka	10.95
SYM-12	5-1200	DC-1000	6.5	.30	8.0	9.0	68	45	50	30	37	25	56	40	46	25	29	18	TTT167	x	9.45
SYM-2500	1-2500	DC-500	6.5	.10	8.5	9.8	70	50	50	25	36	20	60	45	30	10	16	8	TTT167	x	11.95
SYM-42	1000-4200	DC-200	6.7	.20	—	10.2	35 (typ.) 20 (min.)						30 (typ.) 8 (min.)						TTT167	kv	15.95
TUF-1SM	2-600	DC-600	5.85	.04	7.0	8.0	60	50	42	30	37	25	60	45	47	30	36	22	NNN150	z	5.25
TUF-2SM	50-1000	DC-1000	5.85	.07	7.5	9.0	58	40	47	30	42	25	50	35	44	20	29	18	NNN150	z	6.20
TUF-3SM	0.15-400	DC-400	4.7	.02	7.0	8.0	60	50	46	30	35	25	60	40	47	25	35	20	NNN150	z	7.05
TUF-5SM	20-1500	DC-1000	5.7	.04	9.0	9.0	54	40	42	30	39	25	40	25	32	18	23	8	NNN150	z	10.45
TUF-11ASM	1400-1900	40-500	6.8	.30	8.6	8.6	33 (typ.) 20 (min.)						29 (typ.) 15 (min.)						NNN150	z	18.95

L = low range [f_L to $10f_L$]

M = mid range [$10f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

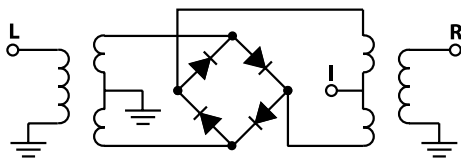

pin connections see case style outline drawings

PORT	d	k	r	w	x	z	gk	ht ¹	hu ²	hp	je	jx	ka	kv
LO	8	8	1	1	2	4	1	6	6	5	1	5	11	1
RF	1	1	8	4	1	1	5	3	2	1	5	10	5	2
IF	3,4 [^]	3	3	5	3	2	4	2	3	7	7	8	2	3
GND EXT.	2,5,6,7	2,5,6,7	2,4,5,6,7	2,3,6	4,5,6	3	2,3,6	1,4,5	1,4,5	2,3,4,6,8	2,3,4,6,8	all others	all others	4,5,6
CASE GND	—	—	—	—	—	3	—	—	—	—	—	—	—	—
NOT USED	—	4	—	—	—	—	—	—	—	—	—	—	—	—
DEMO BOARD				TB-03	TB-12			TB-03		TB-11	TB-11			

[^] pins must be connected together externally

¹ pin connection physically same as w

² pin connection physically same as gk



The Design Engineers Search Engine
 Provides Actual Data Instantly
 At: <http://www.minicircuits.com>

In Stock... Immediate Delivery
 For Custom Versions Of Standard Models
 Consult Our Applications Dept.

