

# UM5 & UM4 CRYSTALS

ISSUE 6; 12 JANUARY 1996

## Delivery Options

- Please contact our sales office for current leadtimes

## Holder Style

- UM5 & UM4 crystals are resistance welded, hermetically sealed in an inert atmosphere with glass to metal seals securing the lead wires
- Holders suffixed '-3L' have a centre third wire which grounds the case

## General Specifications

- Load Capacitance ( $C_L$ ): 10pF to 75pF or Series
- Drive Level: 1mW max.
- Static Capacitance ( $C_0$ ): 6pF max
- Ageing:  $\pm 3$ ppm typical per year

## Standard Frequency Tolerances and Stabilities

- $\pm 5$ ppm,  $\pm 10$ ppm,  $\pm 15$ ppm,  $\pm 20$ ppm,  $\pm 30$ ppm,  $\pm 50$ ppm,  $\pm 100$ ppm

## Operating Temperature Ranges

- 0 to 50°C
- -10 to 60°C
- -20 to 70°C
- -30 to 80°C
- -40 to 90°C
- -55 to 105°C

## Storage Temperature Range

- -55 to 125°C

## Environmental Specification

- Shock: 981m/s<sup>2</sup> for 6ms, three shocks in each direction along three mutually perpendicular planes
- Vibration: 10 to 60Hz 0.75mm displacement, 60 to 500Hz 98.1m/s<sup>2</sup> acceleration, 30 minutes in each of three mutually perpendicular planes


## Marking

- Includes Frequency

## Minimum Order Information Required


- Frequency + Holder + Frequency Tolerance @ 25°C  
+ Frequency Stability + Operating Temperature  
Range + Circuit Condition + Overtone Order

## Outline in mm (inches) - UM5 & UM5-3L

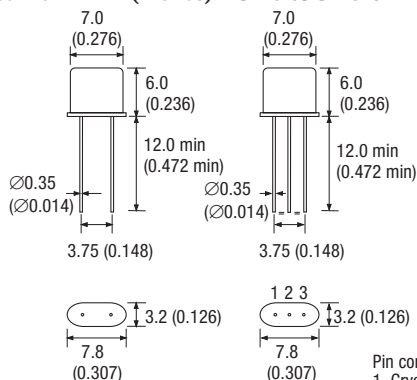


Pin connections  
1. Crystal  
2. Case & ground  
3. Crystal

## Outline in mm (inches) - UM4 & UM4-3L

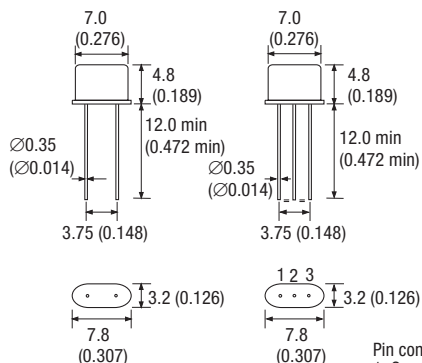

Pin connections  
1. Crystal  
2. Case & ground  
3. Crystal

## Typical Frequency vs Temperature Curves for various angles of AT-cut crystals

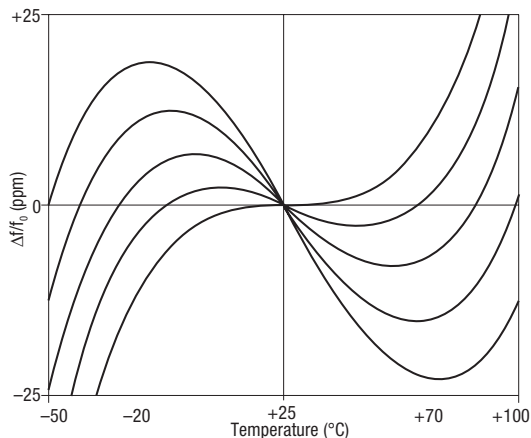

**Electrical Specification – maximum limiting values**

Frequency Range	Frequency Tolerance @ 25°C ±2°C	Operating Temperature Range	Frequency Stability Available Over Operating Temperature		ESR max.	Vibration Mode
			Minimum	Maximum		
10.0 to < 16.0MHz	±10ppm to ±100ppm	0 to 50°C	±10ppm	±100ppm	60Ω	Fundamental AT cut
		-10 to 60°C	±15ppm	±100ppm		
		-20 to 70°C	±15ppm	±100ppm		
		-30 to 80°C	±20ppm	±100ppm		
		-40 to 90°C	±25ppm	±100ppm		
		-55 to 105°C	±50ppm	±100ppm		
16.0 to < 20.0MHz	±5ppm to ±100ppm	0 to 50°C	±10ppm	±100ppm	50Ω	Fundamental AT cut
		-10 to 60°C	±15ppm	±100ppm		
		-20 to 70°C	±15ppm	±100ppm		
		-30 to 80°C	±20ppm	±100ppm		
		-40 to 90°C	±25ppm	±100ppm		
		-55 to 105°C	±50ppm	±100ppm		
20.0 to < 30.0MHz	±5ppm to ±100ppm	0 to 50°C	±10ppm	±100ppm	40Ω	Fundamental AT cut
		-10 to 60°C	±15ppm	±100ppm		
		-20 to 70°C	±15ppm	±100ppm		
		-30 to 80°C	±20ppm	±100ppm		
		-40 to 90°C	±25ppm	±100ppm		
		-55 to 105°C	±50ppm	±100ppm		
30.0 to 40.0MHz	±10ppm to ±100ppm	0 to 50°C	±10ppm	±100ppm	40Ω	Fundamental AT cut
		-10 to 60°C	±15ppm	±100ppm		
		-20 to 70°C	±15ppm	±100ppm		
		-30 to 80°C	±20ppm	±100ppm		
		-40 to 90°C	±25ppm	±100ppm		
		-55 to 105°C	±50ppm	±100ppm		
40.0 to 90.0MHz	±5ppm to ±100ppm	0 to 50°C	±10ppm	±100ppm	120Ω	3rd Overtone AT cut
		-10 to 60°C	±15ppm	100ppm		
		-20 to 70°C	±15ppm	±100ppm		
		-30 to 80°C	±20ppm	±100ppm		
		-40 to 90°C	±25ppm	±100ppm		
		-55 to 105°C	±50ppm	±100ppm		
70.0 to 150.0MHz	±5ppm to ±100ppm	0 to 50°C	±10ppm	±100ppm	150Ω	5th Overtone AT cut
		-10 to 60°C	±15ppm	±100ppm		
		-20 to 70°C	±15ppm	±100ppm		
		-30 to 80°C	±20ppm	±100ppm		
		-40 to 90°C	±25ppm	±100ppm		
		-55 to 105°C	±50ppm	±100ppm		
125.0 to 175.0MHz	±5ppm to ±100ppm	0 to 50°C	±10ppm	±100ppm	150Ω	7th Overtone AT cut
		-10 to 60°C	±15ppm	±100ppm		
		-20 to 70°C	±15ppm	±100ppm		
		-30 to 80°C	±20ppm	±100ppm		
		-40 to 90°C	±25ppm	±100ppm		
		-55 to 105°C	±50ppm	±100ppm		