




Surface Mount

# Voltage Controlled Oscillator



1450 to 1900 MHz

ROS-1900



CASE STYLE: CK605

## Features

- wide frequency range, 1450-1900 MHz
- low phase noise, -106 dBc/Hz at 10 kHz offset
- wide modulation bandwidth, 100 MHz typ.

## Applications

- instrumentation
- PCN

## Electrical Specifications


FREQ. MHz	POWER OUTPUT dBm	TUNING VOLTAGE	PHASE NOISE dBc/Hz SSB at offset frequencies: Typ.				PULLING pk-pk @ 12 dB MHz	PUSHING MHz/V	TUNING SENSI- TIVITY MHz/V	HARMONICS*		3 dB MODULATION BANDWIDTH kHz Typ.	POWER SUPPLY		PRICE \$
			1 kHz	10 kHz	100 kHz	1 MHz				Typ.	Max.		Voltage (V)	Current (mA) Max.	
Min. Max.	Typ.	Min. Max.	1 kHz	10 kHz	100 kHz	1 MHz	Typ.	Typ.	Typ.	Typ.	Max.	Typ.	Voltage (V)	Current (mA) Max.	Qty. (5-49)
1450 1900	7	0.5 20	-80	-106	-126	-146	7	0.7	22-34	-15	-10	100000	10	25	17.95

\* specified to 4<sup>th</sup> harmonic

## Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	+11V
Absolute Max. Tuning Voltage (Vtune)	+22V
All specifications: 50 ohm system	

## Outline drawing

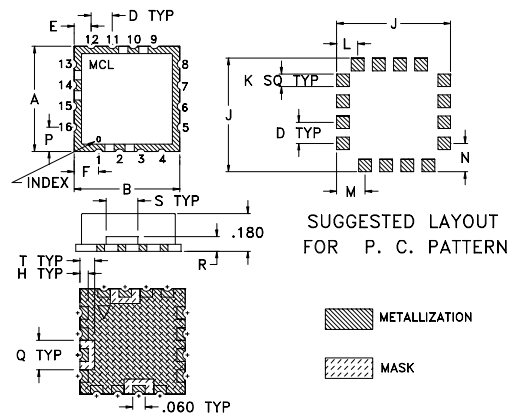

## Pin Connections

PORT	
RF OUT	10
V-CC	14
V-TUNE	2
GND EXT.	others

## Outline dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.500 (12.70)	.500 (12.70)	.180 (4.57)	.100 (2.54)	.080 (2.03)	.115 (2.92)	.060 (1.52)	.040 (1.02)	.540 (13.72)
K	L	M	N	P	Q	R	S	T
.060 (1.52)	.100 (2.54)	.135 (3.45)	.135 (3.45)	.115 (2.92)	.140 (3.56)	.070 (1.78)	.150 (3.81)	.070 (1.78)

WT GRAMS  
1

REV. OR  
M73266  
ED-8419/6  
ROS-1900  
MM/TD/CP  
000810



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661  
 Distribution Centers/ NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-835094 • Fax 44-1252-837010

ISO 9001 CERTIFIED