


EP35 Series

- EPO™ Programmable Oscillators
- 5.0V supply voltage
- HCMOS/TTL output
- Ceramic surface mount package
- Stability to 50ppm
- Available on tape and reel

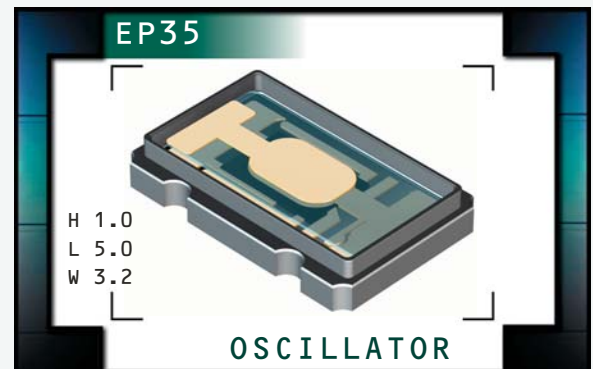

ELECTRICAL SPECIFICATIONS

Frequency Range		1.000MHz to 125.000MHz
Operating Temperature Range		-20°C to 70°C or -40°C to 85°C
Storage Temperature Range		-55°C to 125°C
Supply Voltage (V_{DD})		5.0V _{DC} ±10%
Input Current		45mA Maximum (Unloaded)
Disable Current (TS Option)		30mA Maximum (Pin 1=Ground)
Standby Current (PD Option)		50µA Maximum (Pin 1=Ground)
Frequency Tolerance / Stability	Inclusive of Operating Temp Range, Supply Voltage, and Load	±100ppm or ±50ppm Maximum
Output Voltage Logic High (V_{OH})	w/TTL Load	2.4V _{DC} Minimum I _{OH} =-16mA
	w/HCMOS Load	V _{DD} -0.4V _{DC} Minimum I _{OH} =-16mA
Output Voltage Logic Low (V_{OL})	w/TTL Load or w/HCMOS Load	0.4V _{DC} Maximum I _{OL} =+16mA
Rise Time / Fall Time	w/TTL Load	4 nSeconds Max (0.8V _{DC} to 2.0V _{DC})
	w/HCMOS Load	4 nSec Max (20% to 80% of waveform)
Duty Cycle	at 1.4V _{DC} w/TTL Load; at 50% of waveform w/HCMOS Load	50 ±10% (Standard)
	at 1.4V _{DC} w/TTL Load (≤27.000MHz only), or	50 ±5% (Optional)
	at 50% of waveform w/HCMOS Load (≤50.000MHz Only)	
Load Drive Capability /	≤50.000MHz	50pF HCMOS Load Maximum
Output Type-HCMOS	>50.000MHz	15pF HCMOS Load Maximum
Load Drive Capability /	≤40.000MHz	10TTL Load Maximum
Output Type-TTL	>40.000MHz	5TTL Load Maximum
Output Control Function	TS	Tri-State
	PD	Power Down
Output Control Function Input Voltage	V _{IH} : No Connection or ≥2.0V _{DC}	Enables Output
	V _{IL} : (TS Option) ≤0.8V _{DC}	Disable Output: High Impedance
	V _{IL} : (PD Option) ≤0.8V _{DC}	Disable Output: Logic Low
Aging (at 25°C)		±5ppm / year Maximum
Start Up Time		10 mSeconds Maximum
Period Jitter: Absolute	≤33.000MHz	±250pSec Max, ±100pSec Typical
	>33.000MHz	±100pSec Max, ±50pSec Typical
Period Jitter: One Sigma	≤33.000MHz	±50pSeconds Maximum
	>33.000MHz	±30pSeconds Maximum

MANUFACTURER ECLIPTEK CORP.	CATEGORY OSCILLATOR	SERIES EP35	PACKAGE CERAMIC	VOLTAGE 5.0V	CLASS OS89	REV. DATE 03/02
--------------------------------	------------------------	----------------	--------------------	-----------------	---------------	--------------------

PART NUMBERING GUIDE

EP35 00 ET TTS L - 24.000M TR

FREQUENCY TOLERANCE / STABILITY
 00=±100ppm Max (Standard), 45=±50ppm Maximum

OPERATING TEMP. RANGE
 Blank=-20°C to 70°C (Standard)
 ET=-40°C to 85°C

DUTY CYCLE
 Blank=50±10(%) (Standard), T=50±5(%)


OUTPUT CONTROL FUNCTION
 TS=Tri-State, PD=Power Down

AVAILABLE OPTIONS
 Blank=Bulk (Standard)
 TR=Tape and Reel

FREQUENCY


OUTPUT TYPE
 L=TTL, C=HCMOS

MECHANICAL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS


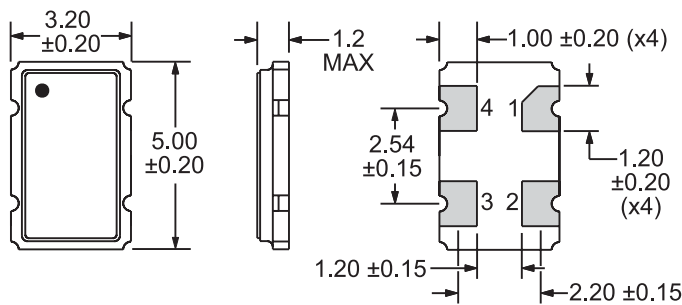


Pin 1: Tri-State or Power Down
 Pin 2: Case Ground
 Pin 3: Output
 Pin 4: Supply Voltage

SUGGESTED SOLDER PAD LAYOUT ALL DIMENSIONS IN MILLIMETERS

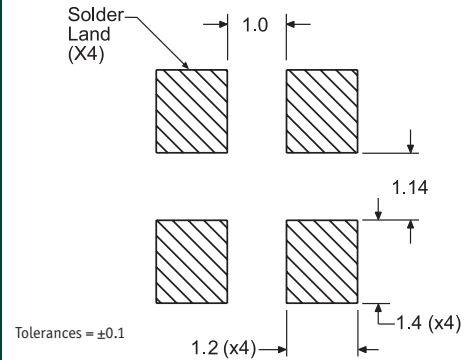

TAPE AND REEL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

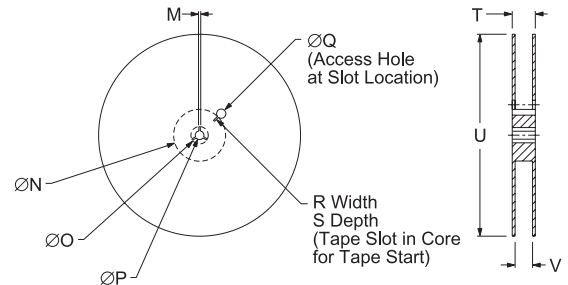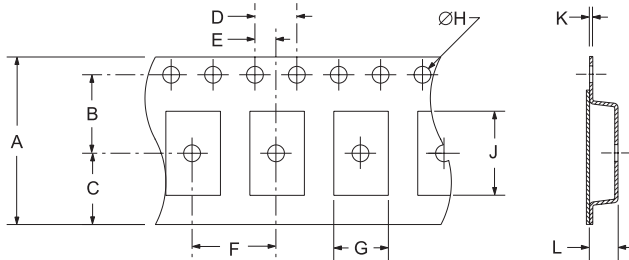

TAPE	A	B	C	D	E
	12.0±0.2	5.5±0.1	6.5±0.1	4.0±0.1	2.0±0.1
F	G	H	J	K	L
8.0±0.1	B0*	1.5+0.1-0.0	A0*	0.30±0.05	K0*

REEL	M	N	O	P	Q
	1.5 MIN	50 MIN	20.2 MIN	13.0±0.2	40 MIN
R	S	T	U	V	QTY/REEL
2.5 MIN	10 MIN	18.4 MAX	180 MAX	12.4+2-0	1,000

*Compliant to EIA 481A

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Characteristic	Specification
Seal Integrity	Bubble test in Perfluorocarbon at +125°C ±5°C for 60 seconds minimum.
Solderability	Sn63 Solder dip at +230°C ±5°C for 5 seconds/95% coverage.
Marking Permanency	10 Strokes with brush after 1 minute soak in solvent, 3 times.
Shock	Random drop on hard wooden plate 3 times from a height of 50cm.
Thermal Shock	300 Cycles from -55°C to +125°C, 5 minute dwell.

MARKING SPECIFICATIONS

Line 1: E XX.XXX
 Frequency in MHz (5 Digits Maximum + Decimal)

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	EP35	CERAMIC	5.0V	OS89	03/02