


**SDR1302
 thru
 SDR1308**

Designer's Data Sheet

- FEATURES:**
- Ultra Fast Recovery: 70 nsec Maximum @ 25°C
 110 nsec Maximum @ 110°C
 - Single Chip Construction
 - PIV to 800 Volts
 - Low Reverse Leakage Current
 - Hermetically Sealed
 - For High Efficiency Applications
 - Replaces Unitrode: UES1304 Series
 - Metallurgically Bonded
 - TX, TXV and Space Level Screening Available
 - Surface Mount versions available

**3 AMP
 200-800 VOLTS
 70 nsec
 ULTRA FAST
 RECTIFIER**

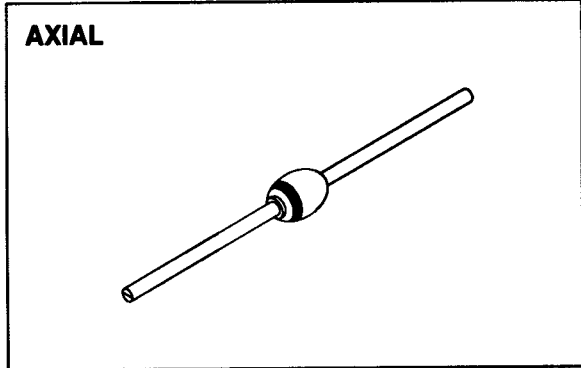

MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage	VRRM	200	Volts
SDR1302		400	
SDR1304	VRWM	600	
SDR1306	VR	800	
SDR1308			
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C)	IO	3	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave Superimposed on IO, allow junction to reach equilibrium between pulses, TA=25°C)	IFSM	75	Amps
Operating and storage temperature	Top & Tstg	-65 to +175	°C
Maximum Thermal Resistance Junction to Leads, L=3/8"	RθJL	20	°C/W

NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RU0011 A

RMD

SDR1302 thru SDR1308

PRELIMINARY




SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

ELECTRICAL CHARACTERISTICS

CHARACTERISTICS	SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop ($I_F = 3 \text{ Adc}$, $T_A = 25^\circ\text{C}$, $300\mu\text{s}$ Pulse)	V_F	1.35	Vdc
Instantaneous Forward Voltage Drop ($I_F = 3 \text{ Adc}$, $T_A = -55^\circ\text{C}$, $300\mu\text{s}$ Pulse)	V_F	1.5	Vdc
Reverse Leakage Current (Rated V_R , $T_A = 25^\circ\text{C}$, 300 μs pulse minimum)	I_R	20	μA
Reverse Leakage Current (Rated V_R , $T_A = 100^\circ\text{C}$, 300 μs pulse minimum)	I_R	1	mA
Junction Capacitance ($V_R = 10 \text{ Vdc}$, $T_A = 25^\circ\text{C}$, $f = 1\text{MHz}$)	C_J	50	pf
Reverse Recovery Time ($I_F = 500\text{ma}$, $I_R = 1\text{A}$, $I_{RR} = 250\text{mA}$, $T_A = 25^\circ\text{C}$)	t_{rr}	70	nsec

CASE OUTLINE:

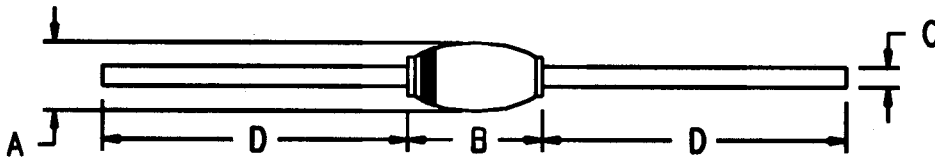

DIMENSIONS

DIM	MIN.	MAX.
A	.140"	.170"
B	.170"	.230"
C	.047"	.053"
D	1.00"	---

TYPICAL OPERATING CURVES

$T_A = 25^\circ\text{C}$ Unless otherwise specified

