

## CMOS 4-BIT MICROCONTROLLER


**TMP47P853VN  
TMP47P853VF**

The 47P853V is the OTP microcontroller with 64kbits PROM. For program operation, the programming is achieved by using with EPROM programmer (TMM2764AD type) and adapter socket (BM1120, BM1121). A.C./D.C characteristics are equivalent to Mask-programmed ROM device.


PART No.	ROM	RAM	PACKAGE	ADAPTER SOCKET
TMP47P853VN	OTP	1024 × 4-bit	SDIP42-P-600-1.78	BM1120
TMP47P853VF	8192 × 8-bit		QFP44-P-1414-0.80D	BM1121

## **PIN ASSIGNMENT (TOP VIEW)**

SDIP42-P-600-1.78

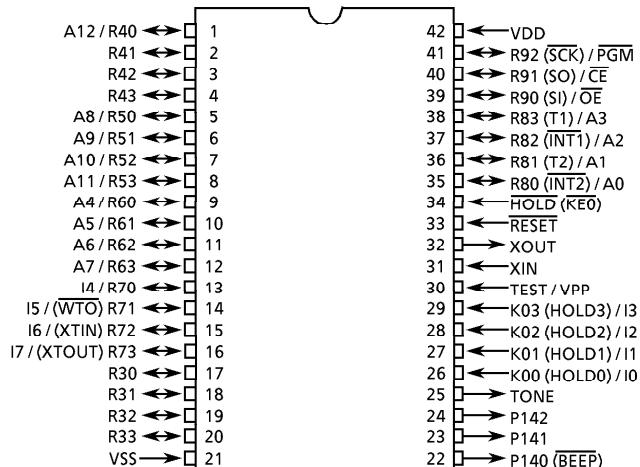


SDIP42-P-600-1.78




TMP47P853VN

OFP44-P-1414-0.80D

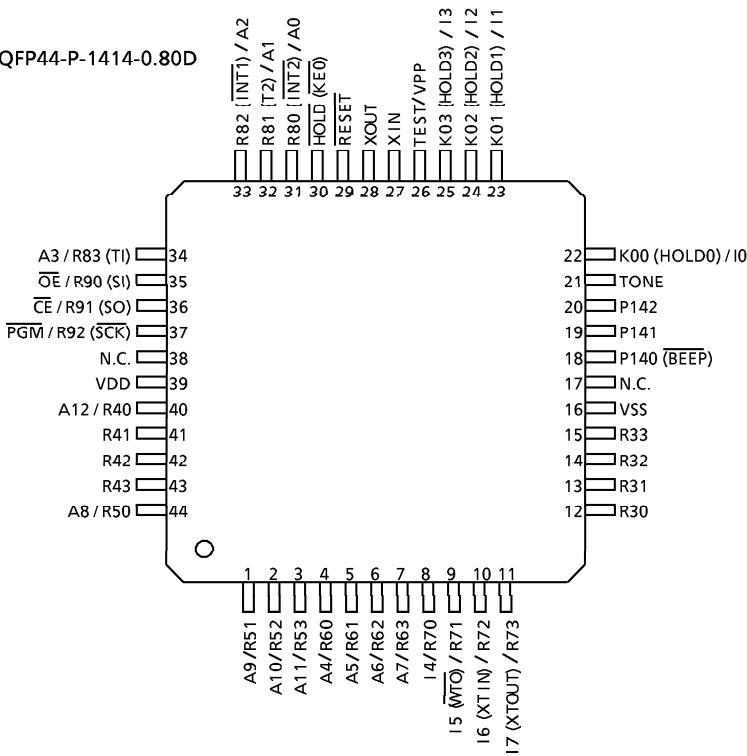

OFP44-P-1414-0.80D



TMP47P853VF

**PIN FUNCTION**

The 47P853 has MCU mode and PROM mode.

**(1) MCU mode**

The 47C853 and the 47P853 are pin compatible (TEST pin for out-going test. Be fixed to low level).

**(2) PROM mode**

PIN NAME	Input/Output	FUNCTIONS	PIN NAME (MCU MODE)
A12	Input	Address inputs	R40
A11 - A8			R53 - R50
A7 - A4			R63 - R60
A3 - A0			R83 - R80
I7 - I4	I/O	Data inputs / outputs	R73 - R70
I3 - I0			K03 - K00
PGM	Input	Program control input	R92
CE		Chip Enable input	R91
OE		Output Enable input	R90
VPP	Power supply	+ 12.5V / 5V (Program supply voltage)	TEST
VCC		+ 5V	VDD
VSS		0V	VSS
TONE	Output	Open	
R33 - R30	I/O	Be fixed to low level	
R43 - R41			
P142 - P140	Output	Open	
RESET	Input	PROM mode setting pins. Be fixed to low level.	
HOLD	Input		
XIN	Input	External clock input (to keep the internal state stable)	
XOUT	Output	Open	

## OPERATIONAL DESCRIPTION

The following is an explanation of hardware configuration and operation in relation to the 47P853V. The 47P853V is the same as the 47C853 except that an OTP is used instead of a Mask ROM.

### 1. OPERATION MODE

The 47P853V has an MCU mode and a PROM mode.

#### 1.1 MCU Mode

The MCU mode is set by fixing the TEST / VPP pin at the "L" level. Operation in the MCU mode is the same as for the 47C853, except that the TEST / VPP pin does not have pull-down resistor and cannot be used open.

##### 1.1.1 Program Memory

The program storage area is the same as for the 47C853.

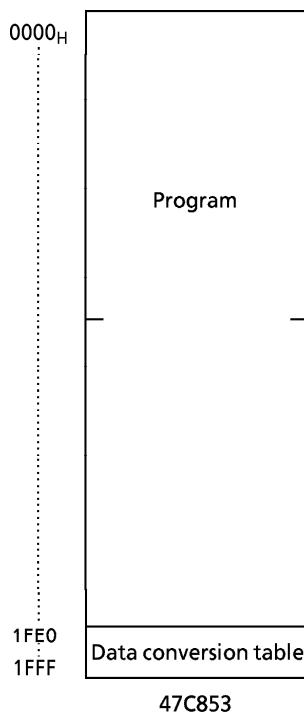


Figure 1-1. Program area

##### 1.1.2 Data Memory

The 47P853V has 1024 × 4-bit data memory.

##### 1.1.3 Input/Output Circuitry

###### (1) Control pins

This is the same as for the 47C853 except that there is no built-in pull-down resistance for the TEST pin.

###### (2) I/O Ports

The input/output circuit of the 47P853V is the same as I/O code WB of the 47C853.

External resistance, for example, is required when using as evaluator of other I/O codes (WE, WH) (Refer to Figure 1-2).

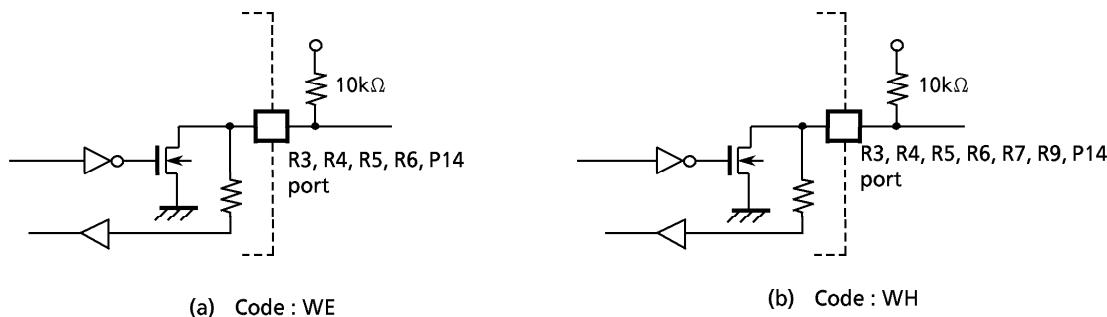


Figure 1-2. I/O code and external circuitry

## 1.2 PROM Mode

The PROM mode is set by setting the RESET, HOLD pins to the "L" level. The PROM mode can be used as a general-purpose PROM writer for program writing and verification (A high-speed program mode is used set the ROM type the same as for the TMM2764AD).

An adapter socket (part No. BM1120 / BM1121) is available for connecting a PROM writer.

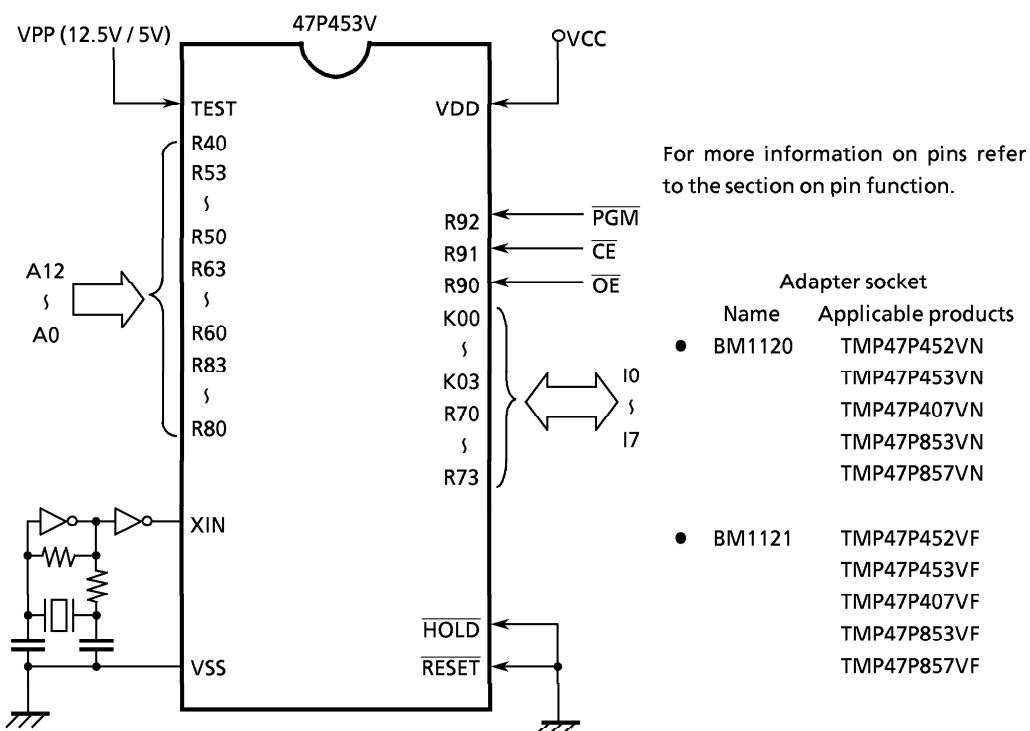


Figure 1-3. Setting for PROM mode

### 1.2.1 High Speed Programming Mode

The device is set up in the high speed programming mode when the programming voltage (12.5V) is applied to the V<sub>pp</sub> terminal with V<sub>cc</sub> = 6V and PGM = V<sub>IH4</sub>. The programming is achieved by applying a Single TTL low level 1 ms, pulse the PGM input after addresses and data are stable. Then the programmed data is verified by using program Verify Mode. If the programmed data is not correct, another program pulse of 1 ms is applied and then programmed data is verified. This should be repeated until the program operates correctly (max. 15 times). After correctly programming the selected address, one additional program pulse with pulse width 4 times that needed for programming is applied. When programming has been completed, the data in all addresses should be verified with V<sub>cc</sub> = V<sub>pp</sub> = 5V.

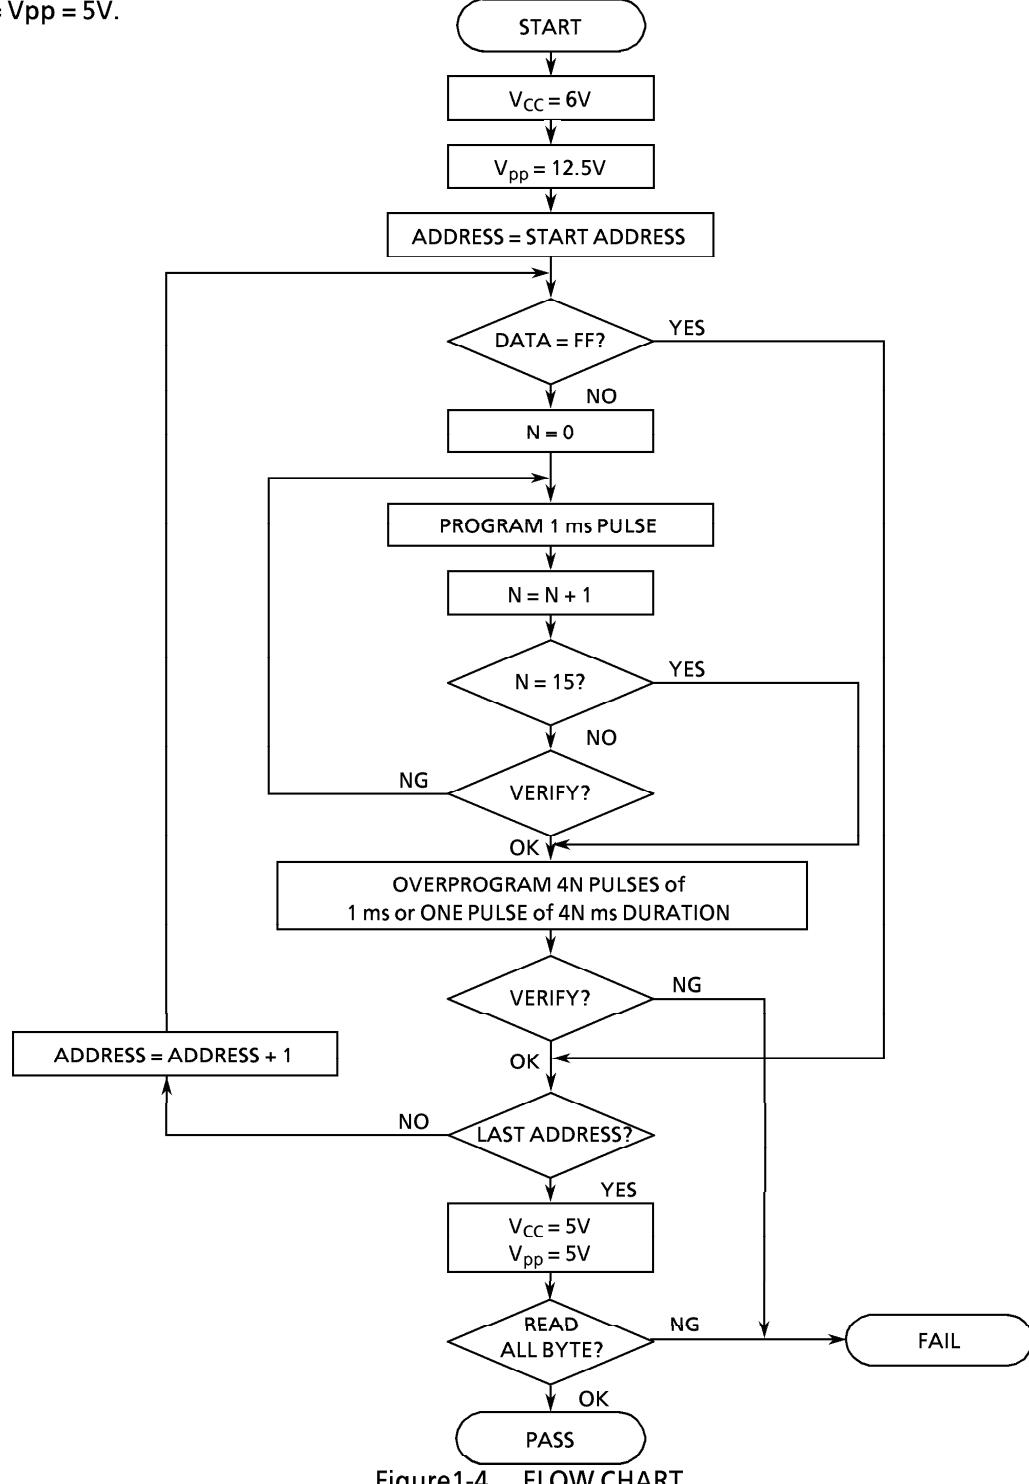


Figure1-4. FLOW CHART

## ELECTRICAL CHARACTERISTICS

ABSOLUTE MAXIMUM RATINGS (V<sub>SS</sub> = 0V)

PARAMETER	SYMBOL	PINS	RATINGS	UNIT
Supply Voltage	V <sub>DD</sub>		- 0.3 to 7	V
Program Voltage	V <sub>PP</sub>	TEST/VPP pin	- 0.3 to 14.0	V
Input Voltage	V <sub>IN</sub>		- 0.3 to V <sub>DD</sub> + 0.3	V
Output Voltage	V <sub>OUT1</sub>	Except sink open drain pin, but include R7	- 0.3 to V <sub>DD</sub> + 0.3	V
	V <sub>OUT2</sub>	Sink open drain pin except R7	- 0.3 to 10	
Output Current (per 1 pin)	I <sub>OUT</sub>		3.2	mA
Power Dissipation [T <sub>opr</sub> = 60°C]	PD		600	mW
Soldering Temperature (time)	T <sub>sld</sub>		260 (10s)	°C
Storage Temperature	T <sub>stg</sub>		- 55 to 125	°C
Operating Temperature	T <sub>opr</sub>		- 30 to 60	°C

Note. Characteristic of R7 is different from 47C853

RECOMMENDED OPERATING CONDITIONS (V<sub>SS</sub> = 0V, T<sub>opr</sub> = - 30 to 60°C)

PARAMETER	SYMBOL	PINS	CONDITIONS	Min.	Max.	UNIT
Supply Voltage	V <sub>DD</sub>		In the Normal mode	2.2	6.0	V
			In the SLOW mode	2.7		
			In the HOLD mode	2.0		
Input High Voltage	V <sub>IH1</sub>	Except hysteresis input	V <sub>DD</sub> ≥ 4.5V	V <sub>DD</sub> × 0.7	V <sub>DD</sub>	V
	V <sub>IH2</sub>	Hysteresis input		V <sub>DD</sub> × 0.75		
	V <sub>IH3</sub>		V <sub>DD</sub> < 4.5V	V <sub>DD</sub> × 0.9		
Input Low Voltage	V <sub>IL1</sub>	Except hysteresis input	V <sub>DD</sub> ≥ 4.5V	0	V <sub>DD</sub> × 0.3	V
	V <sub>IL2</sub>	Hysteresis input			V <sub>DD</sub> × 0.25	
	V <sub>IL3</sub>		V <sub>DD</sub> < 4.5V		V <sub>DD</sub> × 0.1	
Clock Frequency	f <sub>C</sub>	XIN, XOUT		960 / 480		kHz
	f <sub>S</sub>	XTIN, XTOUT		30.0	34.0	

## D.C. CHARACTERISTICS

(V<sub>SS</sub> = 0V, V<sub>DD</sub> = 2.2 to 6.0V, T<sub>opr</sub> = - 30 to 60°C)

PARAMETER	SYMBOL	PINS	CONDITIONS	Min.	Typ.	Max.	UNIT
Hysteresis Voltage	V <sub>HS</sub>	Hysteresis Input		—	0.7	—	V
Input Current	I <sub>IN1</sub>	Port K0, TEST, RESET, HOLD	V <sub>DD</sub> = 5.5V, V <sub>IN</sub> = 5.5V / 0V	—	—	± 2	μA
	I <sub>IN2</sub>	Port R (open drain)					
Input Low Current	I <sub>IL</sub>	Port R (push-pull)	V <sub>DD</sub> = 5.5V, V <sub>IN</sub> = 0.4V	—	—	- 2	mA
Input Resistance	R <sub>IN1</sub>	Port K0		30	70	150	kΩ
	R <sub>IN2</sub>	RESET		100	220	450	
Output Leakage Current	I <sub>LO</sub>	Ports P, R (open drain)	V <sub>DD</sub> = 5.5V, V <sub>OUT</sub> = 5.5V	—	—	2	μA
Output High Voltage	V <sub>OH</sub>	Port R (push-pull)	V <sub>DD</sub> = 4.5V, I <sub>OH</sub> = - 200 μA	2.4	—	—	V
Output Low Voltage	V <sub>OL2</sub>	Except XOUT	V <sub>DD</sub> = 4.5V, I <sub>OL</sub> = 1.6mA	—	—	0.4	V
Supply Current (in the Normal mode)	I <sub>DD</sub>		Except TONE generating V <sub>DD</sub> = 2.2V fc = 960kHz	—	0.3	0.5	mA
	I <sub>DDT</sub>		TONE generating V <sub>DD</sub> = 2.2 V fc = 960kHz	—	0.6	1.2	
Supply Current (in the SLOW mode)	I <sub>DDS</sub>		V <sub>DD</sub> = 3.0V, V <sub>LC</sub> = V <sub>SS</sub> f <sub>S</sub> = 32.768kHz	—	15	30	μA
Supply Current (in the HOLD mode)	I <sub>DDT</sub>		V <sub>DD</sub> = 5.5V	—	0.5	10	μA
			V <sub>DD</sub> = 2.2V, T <sub>opr</sub> = 25°C	—	—	0.5	

*Note 1. Typ. values show those at T<sub>opr</sub> = 25°C, V<sub>DD</sub> = 5V.**Note 2. Input Current I<sub>IN1</sub>: The current through resistor is not included, when the pull-up / pull-down resistor is contained.**Note 3. Supply Current I<sub>DD</sub>: V<sub>IN</sub> = 2.0V / 0.2V**The K0 port is opened when the pull-up/pull-down resistor is contained.**The Voltage applied to the R port is within the valid range V<sub>IL</sub> or V<sub>IH</sub>.**Note 4. Supply Current I<sub>DDS</sub>: V<sub>IN</sub> = 2.8V / 0.2V, Only low frequency clock is only osillated  
(connecting XTIN, XTOUT)*

## TONE OUTPUT CHARACTERISTICS

(V<sub>SS</sub> = 0V, V<sub>DD</sub> = 2.2 to 6.0V, T<sub>opr</sub> = - 30 to 60°C)

PARAMETER	SYMBOL	CONDITIONS	Min.	Typ.	Max.	UNIT
Tone Output Voltage (ROW)	V <sub>TONE</sub>	R <sub>L</sub> ≥ 10kΩ, V <sub>DD</sub> = 2.2V	125	185	250	mVrms
Pre-Emphasis High Band (COL / ROW)	PEHB	PEHB = 20log (COL / ROW)	1	2	3	dB
Output Distortion	DIS		—	—	10	%
Frequency Stability	△f	Except error of osc. frequency	—	—	0.7	%


## A.C. CHARACTERISTICS

(V<sub>SS</sub> = 0V, V<sub>DD</sub> = 2.2 to 6.0V, T<sub>opr</sub> = -30 to 60°C)

PARAMETER	SYMBOL	CONDITIONS	Min.	Typ.	Max.	UNIT
Instruction Cycle Time	t <sub>cy</sub>	In the Normal mode	8.3 / 16.7			μs
		In the SLOW mode	235	—	267	
Shift Data Hold Time	t <sub>SDH</sub>		0.5t <sub>cy</sub> -300	—	—	ns

**Note. Shift Data Hold Time :**

External circuit for SCK pin and SO pin      Serial port (completion of transmission)

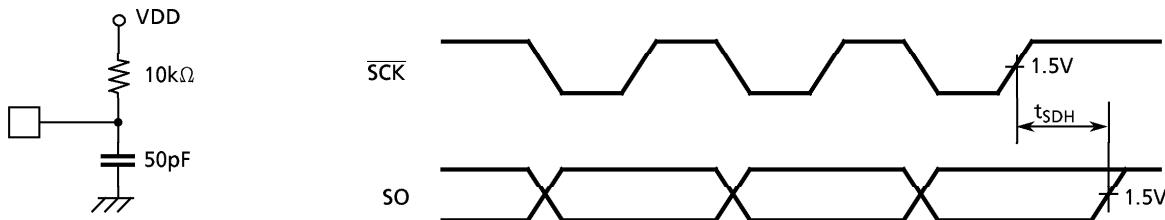

## RECOMMENDED OSCILLATING CONDITIONS

(V<sub>SS</sub> = 0V, V<sub>DD</sub> = 2.2 to 6.0V, T<sub>opr</sub> = -30 to 60°C)


Recommended oscillating conditions of the 47P853V are equal to the 47C853's.

## D.C./A.C. CHARACTERISTICS

(V<sub>SS</sub> = 0V)


## (1) Read Operation

PARAMETER	SYMBOL	CONDITION	Min.	Typ.	Max.	UNIT
Output Level High Voltage	V <sub>IH4</sub>		V <sub>CC</sub> × 0.7	—	V <sub>CC</sub>	V
Output Level Low Voltage	V <sub>IL4</sub>		0	—	V <sub>CC</sub> × 0.3	V
Supply Voltage	V <sub>CC</sub>		4.75	—	6.0	V
	V <sub>PP</sub>					
Address Access Time	t <sub>ACC</sub>	V <sub>CC</sub> = 5.0 ± 0.25V	—	—	350	ns

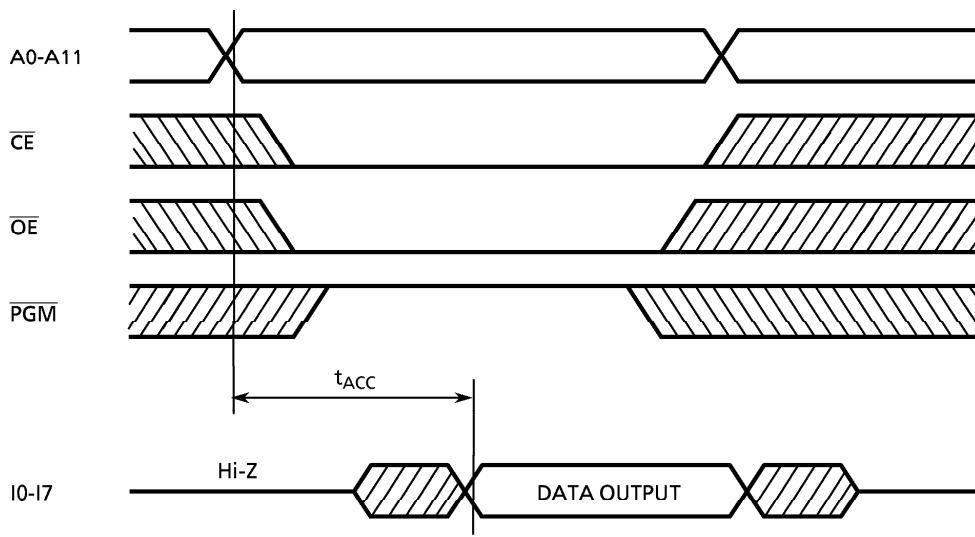

## (2) High Speed Programming Operation

PARAMETER	SYMBOL	CONDITION	Min.	Typ.	Max.	UNIT
Input High Voltage	V <sub>IH4</sub>		V <sub>CC</sub> × 0.7	—	V <sub>CC</sub>	V
Input Low Voltage	V <sub>IL4</sub>		0	—	V <sub>CC</sub> × 0.3	V
Supply Voltage	V <sub>CC</sub>		4.75	—	6.0	V
V <sub>PP</sub> Power Supply Voltage	V <sub>PP</sub>		12.0	12.5	13.0	V
Programming Pulse Width	t <sub>PW</sub>	V <sub>CC</sub> = 6.0 ± 0.25V	0.95	1.0	1.05	ms

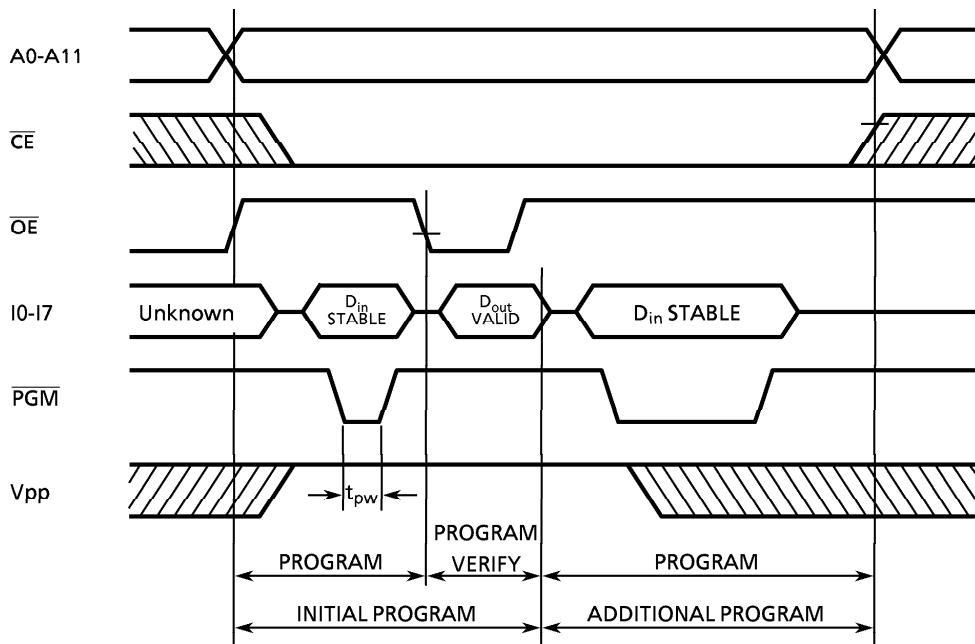

## TYPICAL CHARACTERISTICS

