




- ◆ Single Through Hole
- ◆ Meet CCITT & FCC designed.
- ◆ High isolation voltage 1,500Vrms.

Specification :

Part No	Turn Ratio	OCL (mH)min.	L _L (uh)max	C _{ww} (pf)max	DCR Pri (Ω)max	DCR sec (Ω)max	Schematic	Primary Pins
S6PT-351	1:2CT	1.20	0.50	40	0.70	1.10	S-1	2-6
S6PT-387	1:575:575	1.50	0.80	25	0.70	0.50	S-3	5-6
S6PT-388	1:1.15CT	1.50	0.60	35	0.70	0.90	S-1	2-6
S6PT-389	1:1/1.26	1.50	0.40	35	0.70	0.90	S-1	2-6
S6PT-586	1:1.36CT	1.20	0.80	35	0.70	0.90	S-5	1-5
S6PT-755	1CT:1CT	1.20	0.80	25	0.80	0.80	S-4	1-5
S6PT-771	1CT:2CT	1.20	0.60	45	1.00	2.00	S-4	2-6
S6PT-931	1:1:1	1.20	0.50	25	0.70	0.70	S-3	5-6
S6PT-934	1:1	1.20	0.80	35	0.70	0.70	S-2	1-2
S6PT-936	1CT:1	1.20	0.80	25	0.70	0.70	S-1	1-5
S6PT-937	1:1.36	1.20	0.80	35	0.70	0.70	S-2	5-6
S6PT-943	1CT:2CT	1.20	0.55	30	0.70	1.20	S-4	1-5

Schematic :

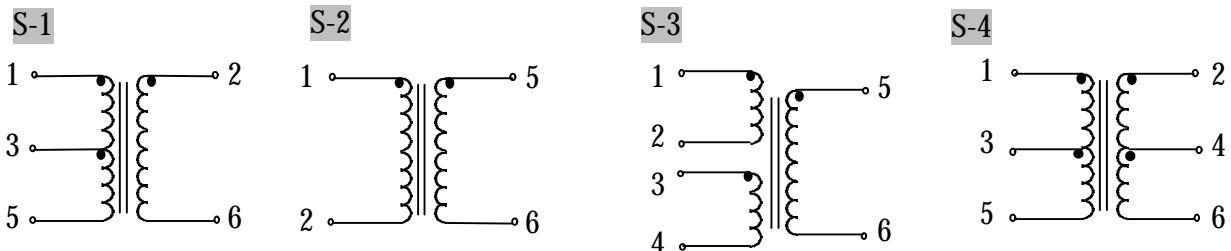

Dimension :

