

# ZTTS Series



# Ceramic Resonator with built-in capacitors

## STANDARD SPECIFICATIONS


Part Number	Frequency Range MHz.	Frequency Accuracy @ 25°C	Temperature Stability °C	Aging For 10 Years	Operating Temperature °C	C1	C2
ZTTS-MG	2.00 ~ 6.99	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	30 pF	30 pF
ZTTS-MT	7.00 ~ 13.00	± 0.5%	± 0.4%	± 0.4%	-20 ~ +80	30 pF	30 pF
ZTTS-MX	13.01 ~ 20.00	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	30 pF	30 pF
ZTTS-MX	20.01 ~ 25.99	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	15pF	15 pF
ZTTS-MX	26.00 ~ 35.00	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	5 pF	5 pF

### Part Number Guide

Sample Part #: **ZTTS -MG - 2.00 -T**  
**ZTTS – Package – Frequency – Packaging**  
**Packaging: - = Bulk , -T = Tape and Reel**

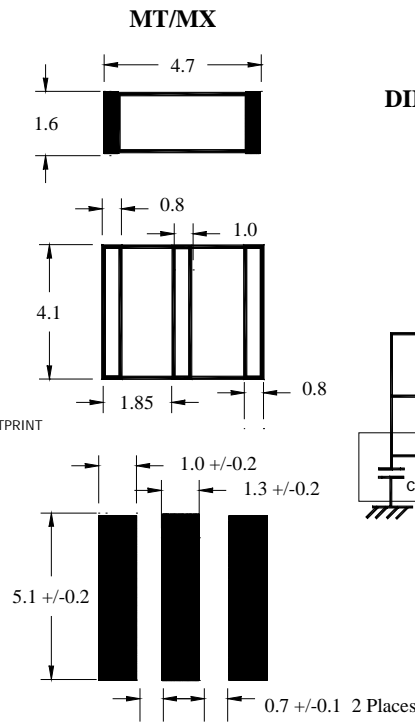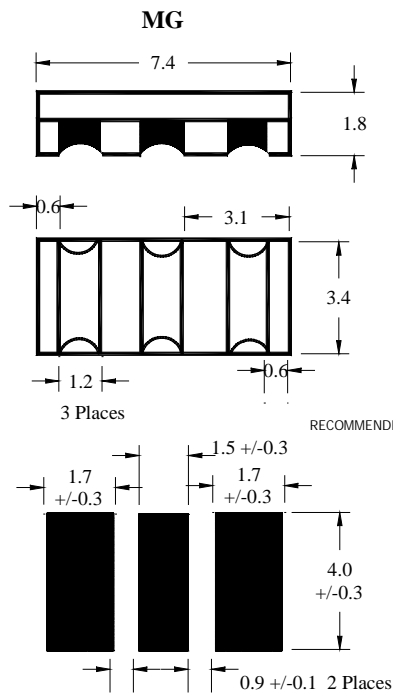

**DIMENSION UNITS: mm**

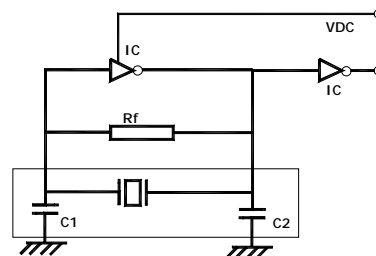

MG / MT IC: C D 4069 UBPX2  
 MX IC: T C 74HCU04

### ILSI America

5458 Louie Lane Reno, NV 89511 Phone: 775-851-8880 • Fax: 775-851-8882

• email: [e-mail@ilsiamerica.com](mailto:e-mail@ilsiamerica.com) • [www.ilsiamerica.com](http://www.ilsiamerica.com)

Specifications subject to change without notice