


# EC16 Series

- HCMOS/TTL output
- 5.0V supply voltage
- 14 pin DIP package
- Stability to 5ppm
- Custom lead length, gull wing options available

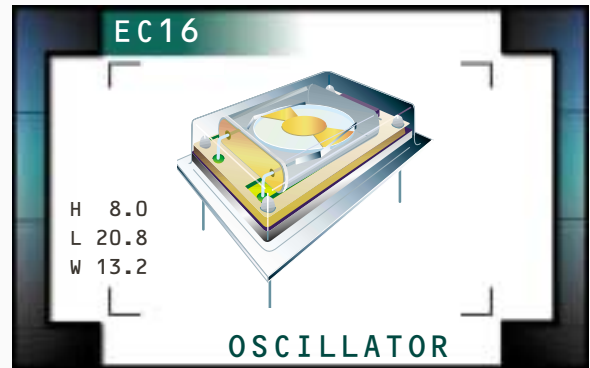

## ELECTRICAL SPECIFICATIONS

<b>Frequency Range</b>	1.000MHz to 46.000MHz	
<b>Operating Temperature Range</b>	Per Table 1	
<b>Storage Temperature Range</b>	-55°C to 125°C	
<b>Supply Voltage (V<sub>DD</sub>)</b>	5.0V <sub>DC</sub> ±10%	
<b>Input Current</b>	1.000MHz to 20.000MHz	15mA Maximum
	20.001MHz to 46.000MHz	40mA Maximum
<b>Frequency Tolerance / Stability</b>	vs. Operating Temperature Range	Per Table 1
	vs. Input Voltage (V <sub>DD</sub> ±5%)	±2.0ppm Maximum
	vs. Load (±2pF ±1TTL)	±1.0ppm Maximum
<b>Internal Trim (Top of Can)</b>	±5ppm Minimum	
<b>Output Voltage Logic High (V<sub>OH</sub>)</b>	w/TTL Load	2.4V <sub>DC</sub> Minimum I <sub>OH</sub> = -16mA
	w/HCMOS Load	V <sub>DD</sub> -0.5V <sub>DC</sub> Minimum I <sub>OH</sub> = -16mA
<b>Output Voltage Logic Low (V<sub>OL</sub>)</b>	w/TTL Load	0.4 V <sub>DC</sub> Maximum I <sub>OL</sub> = +16mA
	w/HCMOS Load	0.5V <sub>DC</sub> Maximum I <sub>OL</sub> = +16mA
<b>Rise Time / Fall Time</b>	at 50% of Waveform w/HCMOS Load or at 1.4V <sub>DC</sub> w/TTL Load	6 nSeconds Maximum
<b>Duty Cycle</b>	at 1.4V <sub>DC</sub> w/HCMOS Load or w/TTL Load	50 ±10(%) (Standard)
	10% to 90% of Waveform w/HCMOS Load or 0.4V <sub>DC</sub> to 2.4V <sub>DC</sub> w/TTL Load	50 ±5(%) (Optional)
<b>Load Drive Capability</b>	10TTL Load or 50pF HCMOS Load	
<b>Pin 1 Tri-State Input Voltage</b>	V <sub>IH</sub> : No Connection	Enables Output
	V <sub>IH</sub> : ≥2.2V <sub>DC</sub>	Enables Output
	V <sub>IL</sub> : ≤0.8V <sub>DC</sub>	Disables Output: High Impedance
<b>Aging (at 25°C)</b>	±1ppm / year Maximum	
<b>Start Up Time</b>	10 mSeconds Maximum	
<b>Period Jitter: Absolute</b>	±100pSeconds Maximum	
<b>Period Jitter: One Sigma</b>	±25pSeconds Maximum	

MANUFACTURER ECLIPTEK CORP.	CATEGORY OSCILLATOR	SERIES EC16	PACKAGE 14 pin DIP	VOLTAGE 5.0V	CLASS OS34	REV. DATE 01/01
--------------------------------	------------------------	----------------	-----------------------	-----------------	---------------	--------------------

## PART NUMBERING GUIDE

### EC16 07 A R TS - 24.000M - CL125

**FREQUENCY STABILITY**  
2 Digit Code Per Table 1

**OPERATING TEMPERATURE RANGE**  
1 Letter Code Per Table 1

**INTERNAL TRIM OPTIONS**  
Blank=No Internal Trim  
R=±5ppm Minimum (Top of Can)

**DUTY CYCLE**  
Blank=50 ±10(%) (Standard)  
T=50 ±5(%)

**AVAILABLE OPTIONS**

Blank=None (Standard)  
CLXXX=Custom Lead Length (See Page 129)  
G=Full Size Gull Wing (See Page 128)




**FREQUENCY**

**PIN 1 CONNECTION**

Blank=No Connection  
TS=Tri-State Enable High

Operating Temperature Range		Frequency Stability				
		X = Availability with Internal Trim Option "Blank" Y = Availability with Internal Trim Option "R"				
		±5ppm	±7ppm	±10ppm	±15ppm	±20ppm
	Code	05	07	10	15	20
0°C to +50°C	A	Y	X, Y	X, Y	X, Y	X, Y
-10°C to +60°C	B		X, Y	X, Y	X, Y	X, Y
-20°C to +70°C	C			X, Y	X, Y	X, Y
-40°C to +85°C	D					X, Y

**MECHANICAL DIMENSIONS**  
ALL DIMENSIONS IN MILLIMETERS

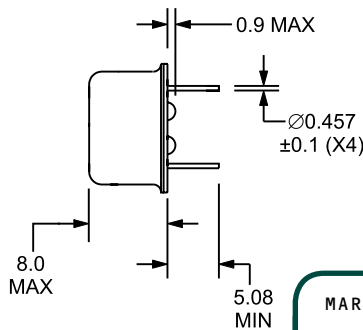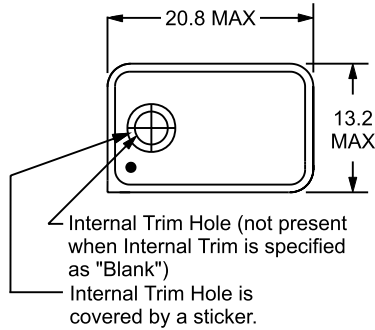

Pin 1: No Connect or Tri-State  
Pin 7: Case Ground  
Pin 8: Output  
Pin 14: Supply Voltage

**MARKING SPECIFICATIONS**

Line 1: ECLIPTEK  
Line 2: EC16 TS  
Line 3: XX.XXX M  
Line 4: XX Y ZZ

Pin 1 Connection  
Blank = No Connection  
TS = Tri-State Enable High  
Series Designator  
Frequency in MHz  
(5 Digits Maximum + Decimal)  
Week of Year  
Last Digit of Year  
Ecliptek Manufacturing Identifier

Note: Pin 1 shall be designated with a dot

**ENVIRONMENTAL/MECHANICAL SPECIFICATIONS**

Characteristic	Specification
Seal Integrity	Bubble test in Perfluorocarbon at +125°C ±5°C for 60 seconds minimum.
Solderability	Sn63 Solder dip at +230°C ±5°C for 5 seconds/95% coverage.
Marking Permanency	10 Strokes with brush after 1 minute soak in solvent, 3 times.
Shock	Random drop on hard wooden plate 3 times from a height of 20cm.
Vibration	Frequency with an amplitude of 1.5mm sweeping between 10Hz to 55Hz within 1 minute (approximately) for 2 hours minimum on each axis (X, Y and Z) for a total of 6 hours.

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	EC16	14 pin DIP	5.0V	OS34	01/01