



HXO2674 @ 35.328 MHz

DIL14 / 4 pins

XO

HXO2674
22-05-2000



Frequency: 38.325 MHz

Features:


Operating Temperature	-10°C~+70°C
Frequency Stability	±15 ppm
Ageing @ 25°C	±5 ppm max/year
Overall Stability (1)	±55 ppm

Supply voltage	+3.3 V ±10%
Current consumption	20 mA max.

Rise & fall time	5 ns max.
Load TTL compatible	15 pF max
Duty cycle	45/55
Jitter	150 ps p-p

(1) Including 25°C calibration, temperature, ageing 10 years, Vcc, load. changes

Package Size (mm)

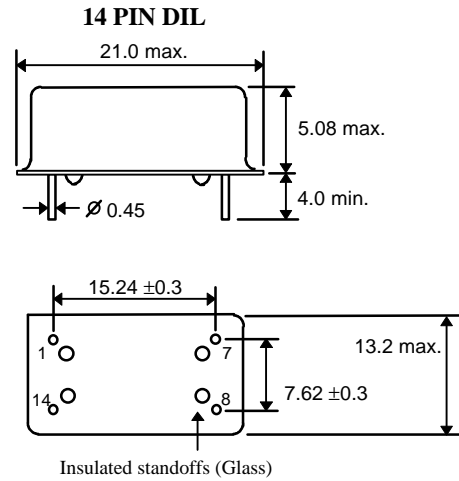

SHORT FORM Data Sheet - For more details, please contact us

SALES OFFICES:

Benelux: +33 (0) 1 49 88 49 00 / **Germany:** +49 (0) 895164-0 / **Nordic:** +46 (0) 8 59030300
France: +33 (0) 1 49 88 49 00 / **Italy:** +39 (0) 738 8869 / **Spain:** +33 (0) 1 49 88 49 00 / **UK:** +44 (0) 1256 883340
USA: +1 (623) 780-1995 / **Asia-Pacific:** +33 (0) 5 56 46 66 84

WEB SITE: <http://www.temex-components.com>

E-mail: adsl@temex.fr

Specifications are subject to change without notice