


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patent, proprietary, design, trade, and manufacturing and reproduction rights thereto.


REVISIONS

REV.	DESCRIPTIONS	DATE	APPROVED
-	Released on ECN #1091	11/15/00	M. A.

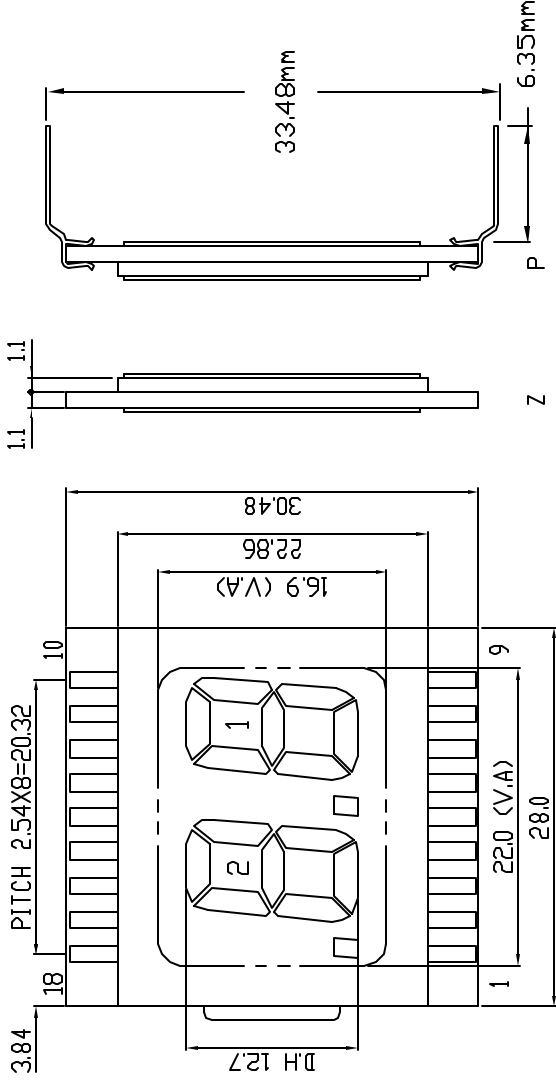

PINOUT:

Pin No.	Seg.	Pin No.	Seg.
1	COM	10	1b
2	3DP	11	1a
3	2e	12	1f
4	2d	13	1g
5	2c	14	2b
6	2DP	15	2a
7	1e	16	2f
8	1d	17	2g
9	1c	18	COM



Specifications:

CONNECTION TYPE	Pin or Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C
WIDE OPERATING TEMPERATURE (°C)	-20~80°C
WIDE STORAGE TEMPERATURE (°C)	-25~85°C

Ordering Information

DG-814-XZ-W	ZEBRA TYPE	DG-814-XP-W	PIN TYPE
Replace the 'X' in the above part number with 'R' for Reflective Polarizer, 'B' for Transmissive Polarizer, or 'F' for Transmissive Polarizer, added -W for Wide Temp.			

APPROVALS	DATE	DENSITRON TECHNOLOGIES PLC.	
DRAWN		TITLE LCD SEGMENTED GLASS	
CHECKED		DWG. NO. DG-814	
ISSUED		SHEET 1 OF 1	

Unless otherwise specified, Dimensions are mm  
Tolerances are:  
X = ± 0.3  
.X = ± 0.05  
XX = ± 0.05  
CAGE CODE #0VSS6