
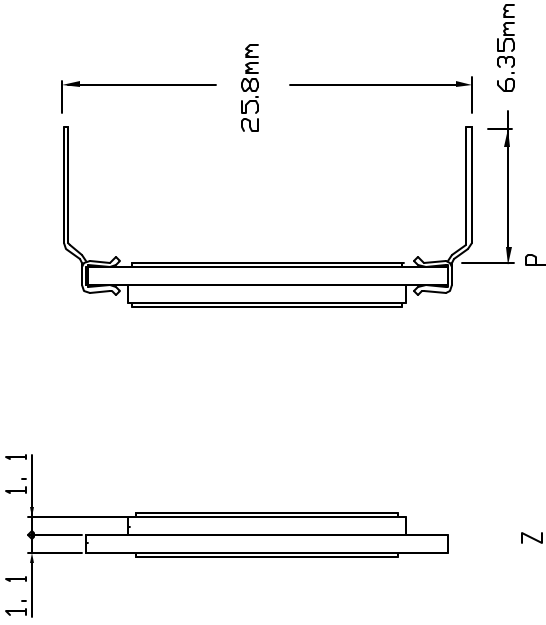



The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patent, proprietary, design, trade, sale, manufacturing and reproduction rights thereto.

REVISIONS		
REV.	DESCRIPTIONS	DATE
-	Released on ECN #1090	11/13/00
		M. A.

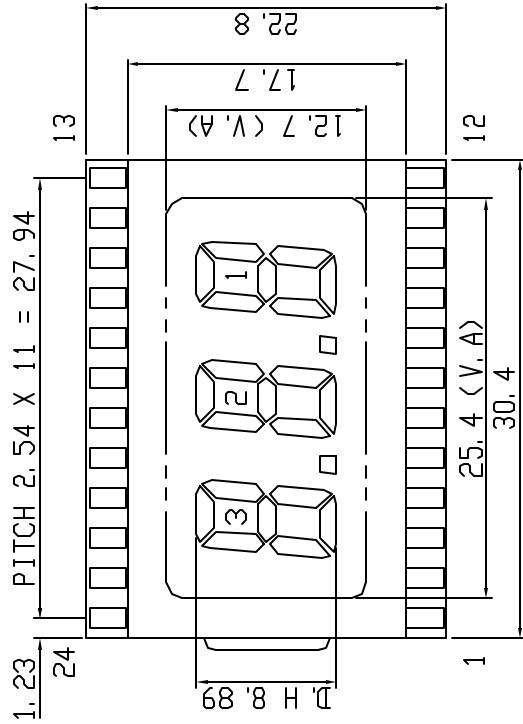

PINOUT:

Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.
1	3e	9	1e	17	2a
2	3d	10	1d	18	2f
3	3c	11	1c	19	2g
4	3DP	12	1b	20	3b
5	2e	13	1a	21	3a
6	2d	14	1f	22	3f
7	2c	15	1g	23	3g
8	2DP	16	2b	24	COM



Specifications:

CONNECTION TYPE	Pin or Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C
WIDEOPERATING TEMPERATURE (°C)	-20~80°C
WIDE STORAGE TEMPERATURE (°C)	-25~85°C

Ordering Information

DG-120910-XZ-W	ZEBRA TYPE	DG-120910-XP-W	PIN TYPE
Replace the 'X' in the above part number with 'R' for Reflective polarizer, 'B' for Transmissive Polarizer, or 'F' for Transmissive Polarizer, add -W for Wide Temp.			

APPROVALS	DATE
DRAWN	
CHECKED	
ISSUED	

DENSITRON TECHNOLOGIES PLC.	
TITLE	LCD SEGMENTED GLASS
DWG. NO.	DG-120910
SHEET 1 OF 1	