

Dimensions in inches and (millimeters)

## Medium-Switching Plastic Rectifier

Reverse Voltage 50 to 800 V

Forward Current 3.0 A

### Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- High surge current capability
- Construction utilizes void-free molded plastic technique
- High forward current operation
- Fast switching for high efficiency
- High temperature soldering guaranteed: 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

### Mechanical Data

**Case:** JEDEC DO-201AD, molded plastic body

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.04 ounce, 1.1 grams

### Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	<b>SYMBOLS</b>	<b>GI910</b>	<b>GI911</b>	<b>GI912</b>	<b>GI914</b>	<b>GI916</b>	<b>GI917</b>	<b>UNITS</b>
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	V
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	510	V
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	V
Maximum average forward rectified current 0.375" (9.5mm) lead length at T <sub>A</sub> =90°C	I <sub>F(AV)</sub>				3.0			A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>				100			A
Typical thermal resistance (NOTE 1)	R <sub>θJA</sub> R <sub>θJL</sub>			22	8.0			°C/W
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>			-50 to +150				°C

### Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	<b>SYMBOLS</b>	<b>GI910</b>	<b>GI911</b>	<b>GI912</b>	<b>GI914</b>	<b>GI916</b>	<b>GI917</b>	<b>UNITS</b>
Maximum instantaneous forward voltage at: 3.0A 9.4A, T <sub>J</sub> =175°C	V <sub>F</sub>			1.25	1.10			V
Maximum DC reverse current T <sub>A</sub> =25°C at rated DC blocking voltage T <sub>A</sub> =100°C	I <sub>R</sub>			10	300			μA
Typical junction capacitance at 4.0V, 1MHz	C <sub>J</sub>			28				pF
Maximum reverse recovery time at I <sub>F</sub> =1.0A, V <sub>R</sub> =30V, di/dt=50A/μs, I <sub>rr</sub> =10% I <sub>RM</sub>	t <sub>rr</sub>			750				ns
Maximum reverse recovery current	I <sub>RM(REC)</sub>			2.0				A

**NOTES:**

(1) Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5mm) lead length,  
with both leads equally heat sink

## Ratings and Characteristic Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

FIG.1 - FORWARD CURRENT DERATING CURVE

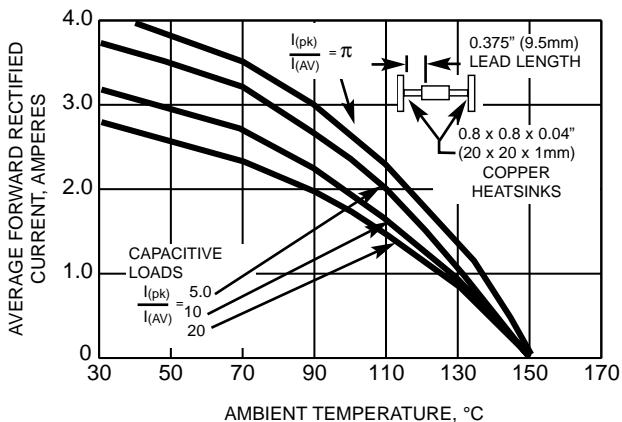


FIG. 2 - MAXIMUM PEAK FORWARD SURGE CURRENT

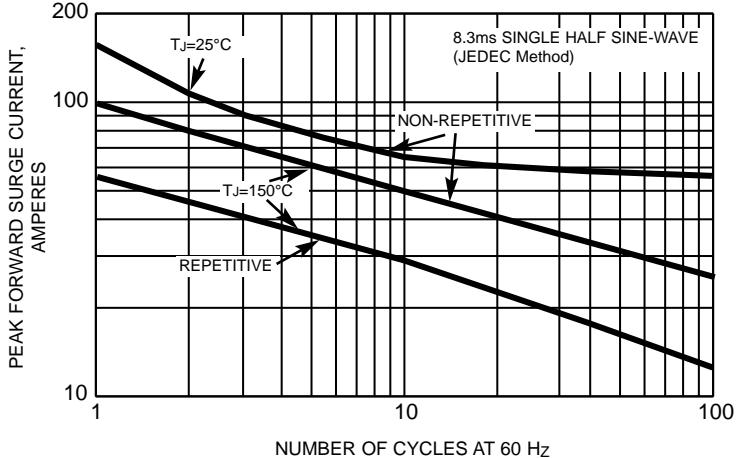


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

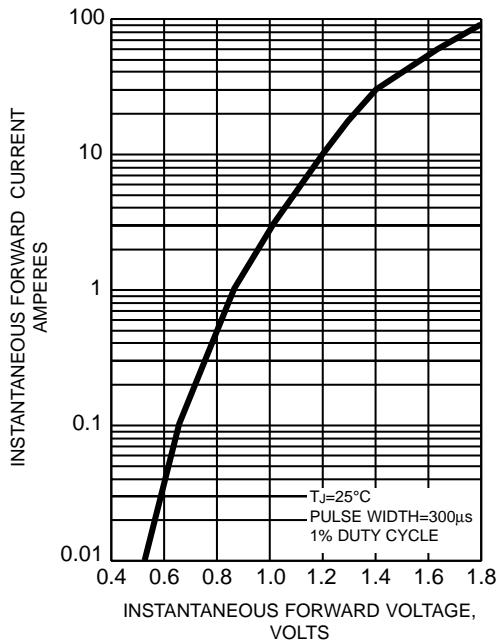


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

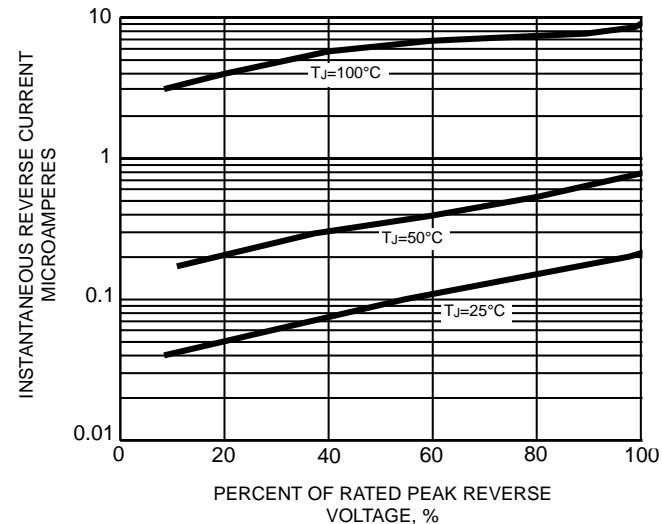


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

