



Single Contact Automotive Style Intermediate Base

15mm SC Bayonet Based LED Lamps



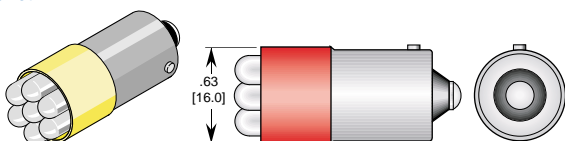
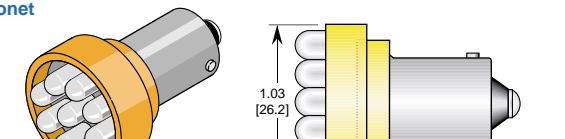
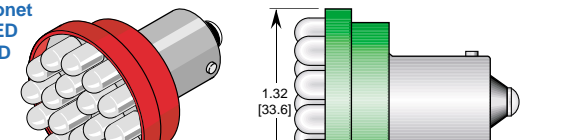
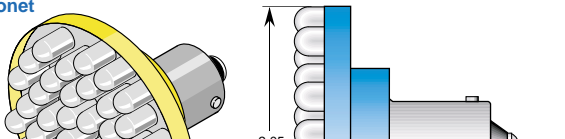
Features

- Maintenance Free, Easy Installation
- Direct Mount in Industry Standard Sockets
- Solid-State, High Shock/Vibration Resistant
- Built-in Current Limiting Resistors
- Long Life 100,000+ hrs (10 Years)

- Low Power Consumption, High Intensity
- Major Power Savings
- Major Reduction in Heat Generation
- Wide Angle 120° Illumination

Applications

- Reading Lights
- Hand Lanterns
- Recreation Vehicles
- Search Light
- Auto Side Markers
- Auto/Aircraft
- Auto Interior
- Aircraft Instrument
- Special Service
- Auto Signal

Miniature Packages	Replaces Incandescent	Part Number	LED Color	Wave-length λp(nm)	Electrical-Optical Data (Ta = 25° C) Typ	
					Operating Voltage & Current	Intensity mcd/LED
SC Bayonet 6/7 LED Cluster  Options B607 OAL 1.38" [35mm] Typ BM607 OAL 1.75" [50mm] Typ BL607 OAL 2.20" [56mm] Typ B606/B607 6/7 Cluster, BiPolar	63,67,71,81,87,89,93,97,98,105,199,209,301,303,305,307,315,623,631,1003,1075,1093,1095,1129,1133,1139,1141,1143,1155,1156,1159,1183,1195,1203,1251,1293,1295,1308,1317,1383,1385,1591,1619,1651,1665,1680,1683,1691,2233	B607CR3K-XXV-BP B607CE3K-XXV-BP B607CO3K-XXV-BP B607CY3K-XXV-BP B607CW6K-XXV-BP B607CAG10K-XXV-BP B607CBG3K-XXV-BP B607CB3K-XXV-BP	UL Red ● SPRed ● SPOrange ● SPYellow ● White ○ A.Green ● B.Green ● SP Blue ●	660 633 612 595 8000K 525 505 470	B606 (6-14V) Red, Org, Yel B606 (6-24V) Wht, Grn, Blu XX = 6V (60-90mA) 12/14V (30-40mA) 24V (15-20mA) 28V (15-20mA) 36V (15-20mA) 48V (15-20mA) 60V (15-20mA) 72V (15-20mA)	3000 3000 3000 3000 6000 10000 3000 3000
SC Bayonet 8/9 LED Cluster  Options B609 OAL 1.38" [35mm] Typ BM609 OAL 1.75" [50mm] Typ BL609 OAL 2.20" [56mm] Typ B608/B609 8/9 Cluster, BiPolar	87,93,199,309,311,705,1093,1095,1129,1133,1139,1141,1143,1156,1159,1195,1203,1293,1295,1591,1619,1651,1665,1680,1683,1691,2232,2233,3011	B609CR3K-XXV-BP B609CE3K-XXV-BP B609CO3K-XXV-BP B609CY3K-XXV-BP B609CW6K-XXV-BP B609CAG10K-XXV-BP B609CBG3K-XXV-BP B609CB3K-XXV-BP	UL Red ● SPRed ● SPOrange ● SPYellow ● White ○ A.Green ● B.Green ● SP Blue ●	660 633 612 595 8000K 525 505 470	B608 (6-14V) Red, Org, Yel B608 (6-24V) Wht, Grn, Blu XX = 6V (80-120mA) 12/14V (40-45mA) 24V (20-30mA) 28V (15-20mA) 36V (15-20mA) 48V (15-20mA) 60V (15-20mA) 72V (15-20mA)	3000 3000 3000 3000 6000 10000 3000 3000
SC Bayonet 18/19 LED & 30 LED Cluster  Options B619 OAL 1.38" [35mm] Typ BM619 OAL 1.75" [50mm] Typ BL619 OAL 2.20" [56mm] Typ B618/B619/B630 18/19/30 Cluster, BiPolar	309,311,1383,1384,1723,3011	B619CR3K-XXV-BP B619CE3K-XXV-BP B619CO3K-XXV-BP B619CY3K-XXV-BP B619CW6K-XXV-BP B619CAG10K-XXV-BP B619CBG3K-XXV-BP B619CB3K-XXV-BP	UL Red ● SPRed ● SPOrange ● SPYellow ● White ○ A.Green ● B.Green ● SP Blue ●	660 633 612 595 8000K 525 505 470	B618 (12-14V) Red, Org, Yel B618 (12-28V) Wht, Grn, Blu XX = 12/14V (90-120mA) 24V (45-60mA) 28V (30-40mA) 36V (30-40mA) 48V (15-20mA) 60V (15-20mA) 72V (15-20mA)	3000 3000 3000 3000 6000 10000 3000 3000
SC Bayonet 40 LED Cluster  Options B640 OAL 1.38" [35mm] Typ BM640 OAL 1.75" [50mm] Typ BL640 OAL 2.20" [56mm] Typ B640 40 Cluster, BiPolar	1019	B640CR3K-XXV-BP B640CE3K-XXV-BP B640CO3K-XXV-BP B640CY3K-XXV-BP B640CW6K-XXV-BP B640CAG10K-XXV-BP B640CBG3K-XXV-BP B640CB3K-XXV-BP	UL Red ● SPRed ● SPOrange ● SPYellow ● White ○ A.Green ● B.Green ● SP Blue ●	660 633 612 595 8000K 525 505 470	XX = 12/14V (120-200mA) 24V (80-120mA) 28V (80-120mA) 36V (60-80mA) 48V (40-60mA) 60V (40-60mA) 72V (30-40mA)	3000 3000 3000 3000 6000 10000 3000 3000

Consult Factory if SAE Certification is Required

