
### INTEGRATED CIRCUITS



Product specification Supersedes data of 1999 Jan 08 IC15 Data Handbook 2000 Jun 30

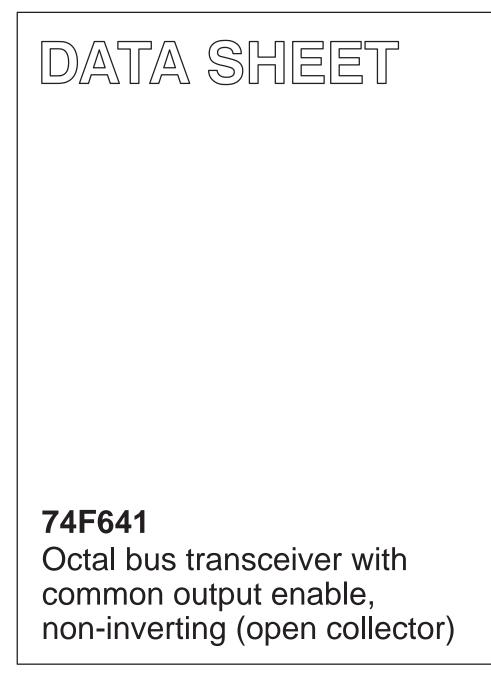

Philips Semiconductors

# Octal bus transceiver with common output enable, non-inverting (open-collector)

74F641

#### **FEATURES**

- High-impedance NPN base inputs for reduced loading (20µA in High and Low states)
- Octal bidirectional bus interface
- Common Output Enable for both Transmit and Receive modes
- Open collector outputs sink 64mA
- Non-inverting

#### **ORDERING INFORMATION**

DESCRIPTION	$\begin{array}{l} \mbox{COMMERCIAL RANGE} \\ \mbox{V}_{CC} = 5V \pm 10\%, \\ \mbox{T}_{amb} = 0^{\circ} \mbox{C to } +70^{\circ} \mbox{C} \end{array}$	PKG DWG #
20-pin plastic DIP	N74F641N	SOT146-1
20-pin plastic SOL	N74F641D	SOT163-1


TYPE	TYPICAL PROPAGATION DELAY	TYPICAL SUPPLY CURRENT (TOTAL)
74F641	8.0ns	69mA

#### INPUT AND OUTPUT LOADING AND FAN-OUT TABLE


PINS	DESCRIPTION	74F(U.L.) HIGH/LOW	LOAD VALUE HIGH/LOW
A0 - A7, B0 - B7	Data inputs	1.0/0.033	20μΑ/20μΑ
T/R	Transmit/Receive input	2.0/0.067	40μΑ/40μΑ
ŌĒ	Output Enable inputs	2.0/0.067	40μΑ/40μΑ
A0 - A7	Data outputs	OC/40	OC/24mA
B0 - B7	Data outputs	OC/106.7	OC/64mA

NOTE: One (1.0) FAST unit load is defined as: 20µA in the High state and 0.6mA in the Low state. OC = Open Collector.

#### **PIN CONFIGURATION**

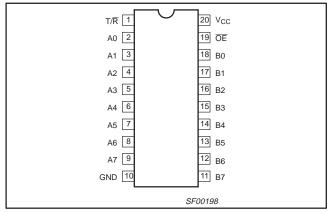


#### LOGIC SYMBOL

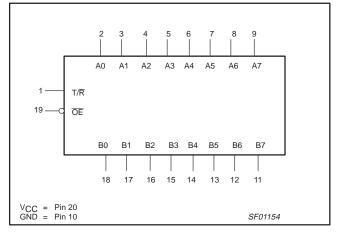

### 74F641

#### LOGIC SYMBOL (IEEE/IEC)

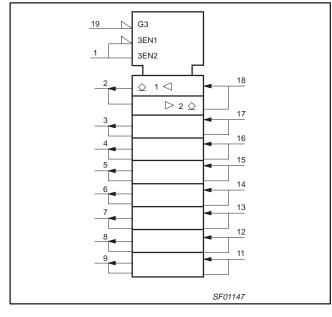

#### **FUNCTION TABLE**


INPU	INPUTS INPUTS/OUTPU		
ŌĒ	T/R	An	Bn
L	L	A=B	INPUTS
Н	Н	INPUTS	B=A
Н	Х	OFF	OFF

H = High voltage level L = Low voltage level

X = Don't care

OFF= High if pull-up resistor is connected to open collector output

#### LOGIC DIAGRAM

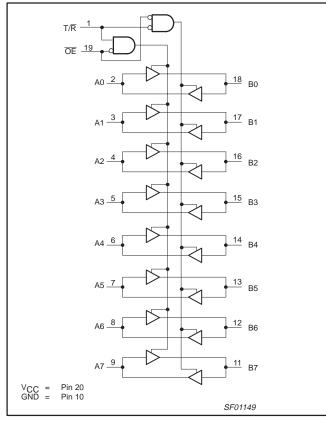

# Octal bus transceiver with common output enable, non-inverting (open-collector)

74F641

#### **ABSOLUTE MAXIMUM RATINGS**

(Operation beyond the limits set forth in this table may impair the useful life of the device.

Unless otherwise noted these limits are over the operating free-air temperature range.)

SYMBOL	PARAMETER	PARAMETER					
V <sub>CC</sub>	Supply voltage		-0.5 to +7.0	V			
V <sub>IN</sub>	Input voltage		-0.5 to +7.0	V			
I <sub>IN</sub>	Input current		-30 to +5	mA			
V <sub>OUT</sub>	Voltage applied to output in High output state		–0.5 to +V <sub>CC</sub>	V			
	Current applied to output in Low output state	A0–A7	48	mA			
IOUT		B0–B7	128	mA			
T <sub>amb</sub>	Operating free-air temperature range		0 to +70	°C			
T <sub>stg</sub>	Storage temperature range		-65 to +150	°C			

#### **RECOMMENDED OPERATING CONDITIONS**

SYMBOL	PARA		LIMITS					
STWDUL	FARAN		MIN	NOM	MAX	UNIT		
V <sub>CC</sub>	Supply voltage		4.5	5.0	5.5	V		
V <sub>IH</sub>	High-level input voltage		2.0			V		
V <sub>IL</sub>	Low-level input voltage			0.8	V			
I <sub>IK</sub>	Input clamp current				-18	mA		
I <sub>OH</sub>	High-level output current				4.5	V		
1		A0–A7			24	mA		
IOL	Low-level output current	B0–B7			64	mA		
T <sub>amb</sub>	Operating free-air temperature range	0		70	°C			

#### DC ELECTRICAL CHARACTERISTICS

(Over recommended operating free-air temperature range unless otherwise noted.)

SYMBOL		METER		тес		IC1		LIMITS		UNIT
STWBUL				TEST CONDITIONS <sup>1</sup>			MIN TYP <sup>2</sup> MAX			
I <sub>OH</sub>	High-level output cu	rrent		V <sub>CC</sub> V <sub>IH</sub> =	= MIN, V <sub>IL</sub> = M = MIN, V <sub>OH</sub> = M	AX, 1AX			250	μΑ
			A0–A7		I <sub>OL</sub> = 24mA	±10%V <sub>CC</sub>		0.35	0.50	V
Va	Low-level output vol	tago	AU-AI	$V_{CC} = MIN,$ $V_{IL} = MAX,$ $V_{IH} = MIN,$	-	±5%V <sub>CC</sub>		0.35	0.50	V
V <sub>OL</sub>		laye	B0–B7	$V_{IH} = MIN,$	I <sub>OL</sub> = 48mA	±10%V <sub>CC</sub>		0.38	0.55	V
			B0-B7		$I_{OL} = 64mA$	$\pm 5\% V_{CC}$		0.42	0.55	V
V <sub>IK</sub>	Input clamp voltage			$V_{CC} = MIN, I_I = I_{IK}$				-0.73	-1.2	V
1	Input current at max	timum	T/R, OE	V <sub>CC</sub> = 0.0V, V	r <sub>l</sub> = 7.0V				100	μA
'I	input voltage		An, Bn	V <sub>CC</sub> = 5.5V, V	' <sub>l</sub> = 5.5V				1	mA
	Llink laughingut aug		T/R, OE						40	μΑ
Iн	High-level input cur	ent	An, Bn	$V_{CC} = MAX, V_1 = 2.7V$					20	μΑ
1			T/R, OE						-40	μΑ
IL	Low-level input current An, Bn		An, Bn	$V_{CC} = MAX, V_1 = 0.5V$					-20	μΑ
1	Supply current	74F641	I <sub>ССН</sub>		An=T/R=4.5,	OE=GND		60	90	mA
lcc	(total)	/4/041	I <sub>CCL</sub>	V <sub>CC</sub> = MAX	T/R=4.5V, An	=OE=GND		78	120	mA

#### NOTES:

1. For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.

2. All typical values are at  $V_{CC} = 5V$ ,  $T_{amb} = 25^{\circ}C$ .


### Octal bus transceiver with common output enable, non-inverting (open-collector)

74F641


#### AC ELECTRICAL CHARACTERISTICS - 74F641


					LIM	ITS		
SYMBOL	PARAMETER	TEST CONDITION	Ta	/ <sub>CC</sub> = +5\ <sub>mb</sub> = +25 0pF, R <sub>L</sub> =	°C	T <sub>amb</sub> = 0°C	iV ± 10% C to +70°C R <sub>L</sub> = 500Ω	UNIT
			MIN	TYP	MAX	MIN	MAX	
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay An to Bn	Waveform 1	6.5 4.0	8.5 6.0	11.5 9.5	6.5 4.0	12.5 11.0	ns
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay Bn to An	Waveform 1	6.0 3.5	8.0 5.5	11.5 7.5	6.0 3.5	12.0 8.0	ns
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay OE to An	Waveform 2	7.0 5.0	10.5 7.0	12.5 9.0	7.0 5.0	13.0 10.0	ns
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay OE to Bn	Waveform 2	8.0 3.5	9.0 7.5	12.5 9.5	8.0 5.5	13.5 10.5	ns

#### AC WAVEFORMS

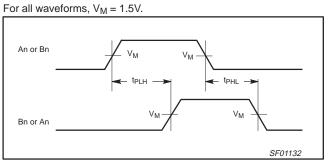

Waveform 1. Propagation Delay for An to Bn or Bn to An

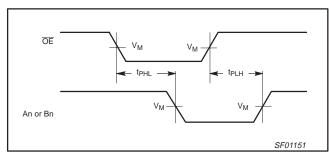



#### VCC C AMP (V) 90% 90% NEGATIVE Ş ٧м ٧M RI PULSE VIN VOUT 10% PULSE 10% D.U.T. 6 0V GENERATOR tTHL (tf) tTLH (tr) ≷ ₹<sub>RL</sub> Rт CL tTLH (tr) tTHL (tf) AMP (V) 90% 90% POSITIVE **Test Circuit for 3-State Outputs** ٧м Vм PULSE 10% 10% 0V SWITCH POSITION TEST SWITCH **Input Pulse Definition** closed t<sub>PLZ</sub> closed t<sub>PZL</sub> All other open **DEFINITIONS:** Load resistor; R INPUT PULSE REQUIREMENTS see AC electrical characteristics for value. family Load capacitance includes jig and probe capacitance; $C_L =$ Vм $\mathbf{t}_{\mathsf{THL}}$ amplitude rep. rate tw t<sub>TLH</sub> see AC electrical characteristics for value. Termination resistance should be equal to ZOUT of R<sub>T</sub> = 74F 3.0V 1.5V 1MHz 500ns 2.5ns 2.5ns pulse generators.


#### SF00777

### TEST CIRCUIT AND WAVEFORMS

#### Product specification

# Octal bus transceiver with common output enable, non-inverting (open collector)

74F641

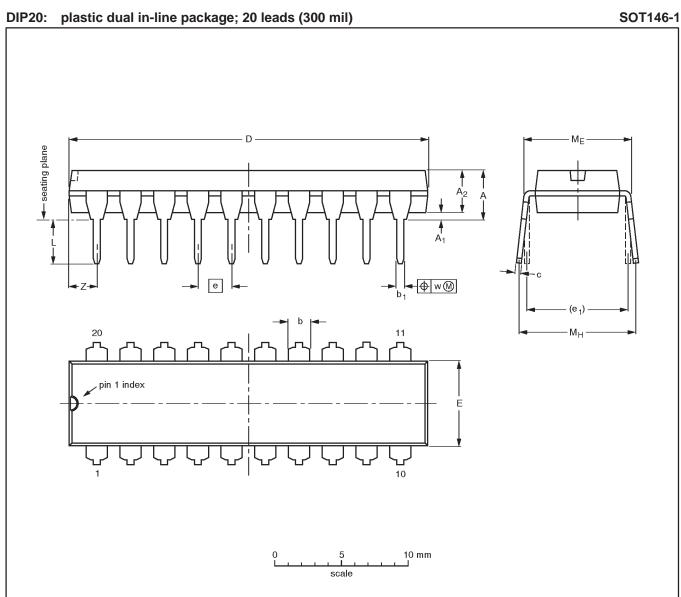

#### DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A <sub>1</sub> min.	A <sub>2</sub> max.	b	b <sub>1</sub>	с	D <sup>(1)</sup>	Е <sup>(1)</sup>	e	e <sub>1</sub>	L	M <sub>E</sub>	M <sub>H</sub>	w	Z <sup>(1)</sup> max.
mm	4.2	0.51	3.2	1.73 1.30	0.53 0.38	0.36 0.23	26.92 26.54	6.40 6.22	2.54	7.62	3.60 3.05	8.25 7.80	10.0 8.3	0.254	2.0
inches	0.17	0.020	0.13	0.068 0.051	0.021 0.015	0.014 0.009	1.060 1.045	0.25 0.24	0.10	0.30	0.14 0.12	0.32 0.31	0.39 0.33	0.01	0.078

#### Note


1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.

OUTLINE		REFER	RENCES	EUROPEAN	ISSUE DATE
VERSION	IEC	JEDEC	EIAJ	PROJECTION	ISSUE DATE
SOT146-1			SC603	$\bigcirc$	<del>-92-11-17-</del> 95-05-24

# Octal bus transceiver with common output enable, non-inverting (open collector)

74F641

Product specification

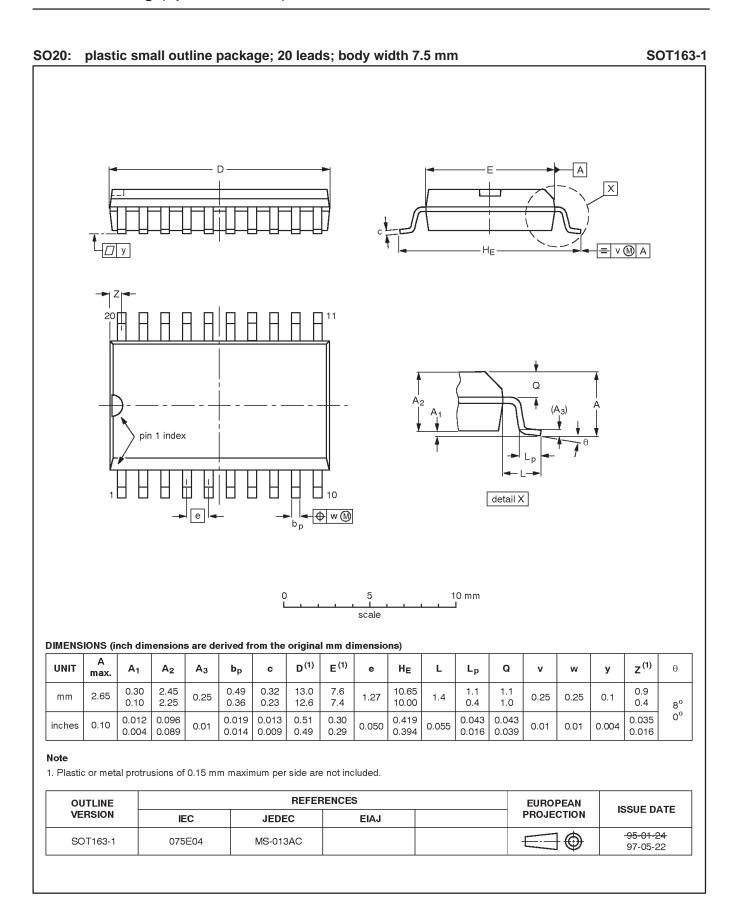

### Octal bus transceiver with common output enable, non-inverting (open collector)

### 74F641

#### Data sheet status

Data sheet status	Product status	Definition [1]
Objective specification	Development	This data sheet contains the design target or goal specifications for product development. Specification may change in any manner without notice.
Preliminary specification	Qualification	This data sheet contains preliminary data, and supplementary data will be published at a later date. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

[1] Please consult the most recently issued datasheet before initiating or completing a design.

#### Definitions

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

#### Disclaimers

Life support — These products are not designed for use in life support appliances, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

**Right to make changes** — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

Philips Semiconductors 811 East Arques Avenue P.O. Box 3409 Sunnyvale, California 94088–3409 Telephone 800-234-7381 © Copyright Philips Electronics North America Corporation 2000 All rights reserved. Printed in U.S.A.

> Date of release: 06-00 9397-750 07277

Let's make things better.



Document order number:

